
SPECIFICATIONS

PARAMETERS	VALUES	UNIT
DIRECTIVITY	OMINI	-
SENSITIVTY	-38 ± 3	dB
STANDARD OPERATING VOLTAGE	2	Vdc
MAX OPERATING VOLTAGE	10	Vdc
CURRENT CONSUMPTION (MAX)	0.5	mA
IMPEDANCE	2.2	KOhm
SIGNAL TO NOISE RATIO (MIN.)	60	dB
TERMINAL	PIN	-
INTERNAL CAPACITOR	N/A	pF

THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHIBITED. ©2003, Projects Unlimited Inc.

7	7	1		1	
OPRIETARY TO ' USE OR		REVI	SION HISTORY		
HOUT PRIOR	LTR	DESCRIPTI		DATE	APPROVED
SUNLIMITED,	_	RELEASED FROM EN		1/24/2006	
nc.	А	ADDED TERMINAL F	POLARITY	2/5/2010	D.F.
		REVISED TO INVENTOR 3-D D		10/26/2010	B.R.
	С	REVISED DIAMETER T	OLERANCE	10/8/2015	B.R.
-2.2±0.2		RM 1 (+)	о — текм 2 (-)		
UNLESS OTHER SPECIFIED: DIMENSIONS ARI MILLIMETERS TOLERANCES ARE ±0.5 ANI ANGLES ARE ±	SIZE		ROM-22	r. 1/24/200 238P-NI	Drawn Date D6 10/26/2010 R Edition Sheet
	38P-NF-R.idw	a projects unlimited company	Micropho	ne	- 1/1
4	4	I		1	

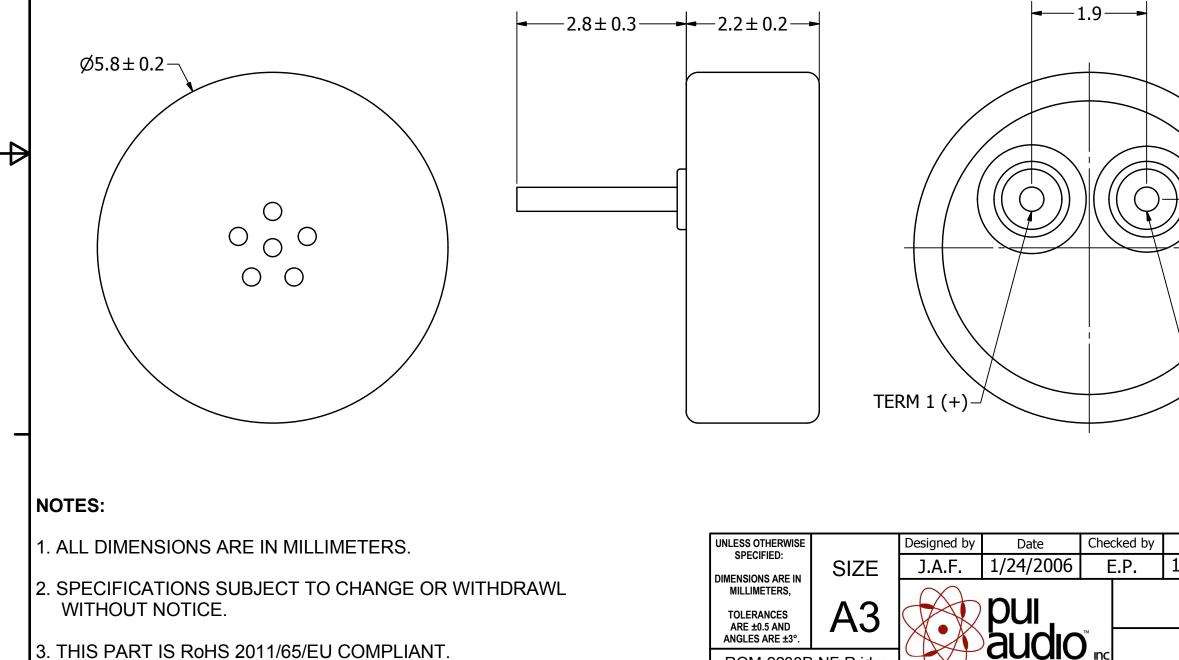

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

PUI Audio: ROM-2238P-NF-R