

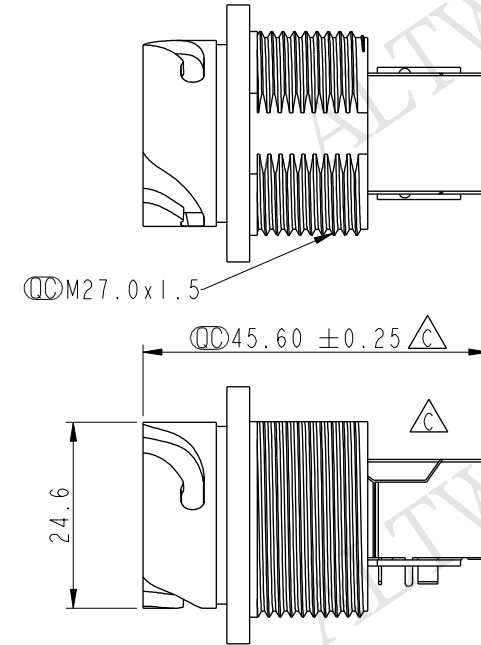

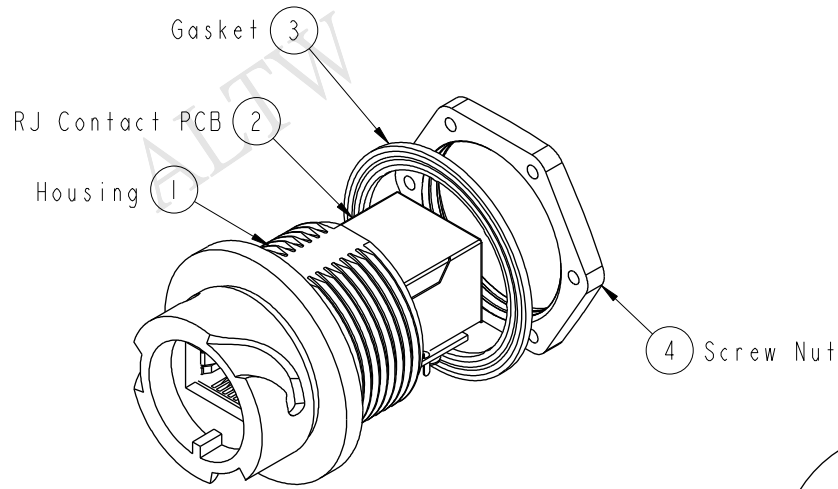


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1370002	2013/07/06	Cary	Change Note & Panel Cut-out
C	LEN13A0049	2013/10/15	Raison	Modify Jack PN, Note Panel THK
D	LEN1610289	2016/01/13	Ruru	Change Note



Recommended Panel Cut-out

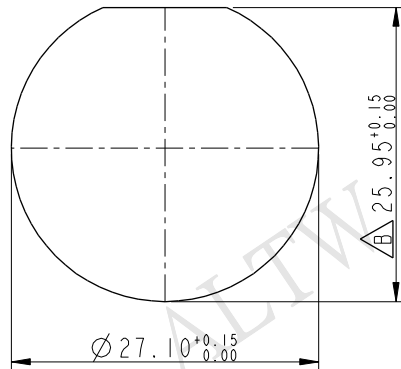

Note:

- * $\varnothing$ Important Dimension
- * Waterproof Rate: IP67 (Unmated Waterproof)
- * Housing: Nylon+GF, BLACK
- * RJ45 Jack: Cat 5e, Shield
- $\triangle$ * Gasket: Silicone, UL 94V-0, Black.
- * Screw Nut: Nylon+GF, BLACK
- * Contact: Phosphor Bronze, Gold Flash Over Nickel
- $\triangle$ * For Panel Thickness Max: 9.0mm
- $\triangle$ * Screw torsion value range: 8~15kgf-cm
- $\triangle$ * Temperature Range: -40°C to 105°C
- $\triangle$ * All Parts Should Meet RoHS Compliant.

UNIT: mm			TITLE RJ45 ODVA, PANEL, REAR LOCK UNMATED WATERPROOF		
TOLERANCE	.X ±0.25	.XX ±0.1	SCALE 1:1	SIZE A4	SHEET 1 OF 1
ANGLES	.XXX ±0.05	±1°	REV. D	WC-REV. B.6	$\varnothing$ Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO ROP-5SRFFH-TCU7001	DRAWN BY Ruru	DATE 2016-01-13
DWG NO ROP-5SRFFH-TCU7001	CHECKED BY Rita	DATE 2016-01-13
CUSTOMER ALTW	APPROVED BY Lisa	DATE 2016-01-13