

Features

Regulated Converters

- 4:1 Wide Input Voltage Range
- 1.6kVDC Isolation
- UL Certified
- Efficiency up to 89%
- Six-Sided Continuous Shield

RECOM
DC/DC Converter

RP20-FW

20 Watt
2" x 1"
Single & Dual
Output



Description

The RP20-FW series wide range input DC/DC converters are certified to UL 60950-1 and to cUL 60950-1. This makes them ideal for all telecom and industrial applications where approved safety standards are required. The industry standard 2" x 1" package meets military standards for thermal shock and vibration tolerance.

Selection Guide

Part Number	Input Voltage Range [VDC]	Output Voltage [VDC]	Output Current [mA]	Input ⁽¹⁾ Current [mA]	Efficiency ⁽¹⁾ typ. [%]	Max. Capacitive Load ⁽²⁾ [μF]
RP20-243.3SFW ^(3,4)	9-36	3.3	5500	890	85	18000
RP20-2405SFW ^(3,4)	9-36	5	4000	947	88	9600
RP20-2412SFW ^(3,4)	9-36	12	1670	971	86	1650
RP20-2415SFW ^(3,4)	9-36	15	1330	967	86	1050
RP20-483.3SFW ^(3,4)	18-75	3.3	5500	445	85	18000
RP20-4805SFW ^(3,4)	18-75	5	4000	473	88	9600
RP20-4812SFW ^(3,4)	18-75	12	1670	480	87	1650
RP20-4815SFW ^(3,4)	18-75	15	1330	478	87	1050
RP20-2405DFW ^(3,4)	9-36	±5	±2000	947	88	±4800
RP20-2412DFW ^(3,4)	9-36	±12	±833	957	87	±825
RP20-2415DFW ^(3,4)	9-36	±15	±667	958	87	±525
RP20-4805DFW ^(3,4)	18-75	±5	±2000	468	89	±4800
RP20-4812DFW ^(3,4)	18-75	±12	±833	473	88	±825
RP20-4815DFW ^(3,4)	18-75	±15	±667	474	88	±525



Notes:


Note1: Maximum value at nominal input voltage and full load.

Note2: Test by minimum Vin and constant resistor load.



UL
E196683

Model Numbering

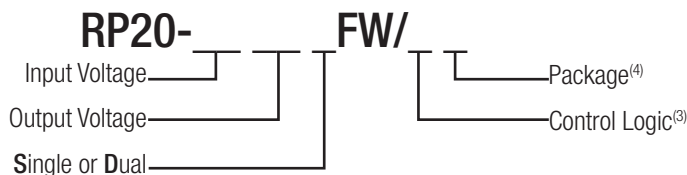

Ordering Examples

RP20-2405SFW = 24V 4:1 Input, 5V Output, Positive Logic CTRL pin fitted

RP20-4812DFW/N-HC = 48V 4:1 Input, ±12V Output, Negative Logic CTRL pin fitted, Heat-sink fitted

Notes:

Note3: no suffix for CTRL function with Positive Logic (1=ON, 0=OFF), and trim pin add "N" for CTRL function with Negative Logic (0=ON, 1=OFF), and trim pin

Note4: add suffix -HC for premounted Heat-sink and clips

UL60950-1 Certified

Specifications measured at Ta = 25°C, nominal input voltage, full load otherwise noted

BASIC CHARACTERISTICS

Parameter	Condition	Min.	Typ.	Max.
Input Voltage Range	nom. Vin = 24V nom. Vin = 48V	9VDC 18VDC	24VDC 48VDC	36VDC 75VDC
Under Voltage Lockout (UVLO)	Vin = 24V DC-DC ON DC-DC OFF		7.5VDC	9VDC
	Vin = 48V DC-DC ON DC-DC OFF		15VDC	18VDC
Input Filter				Pi-Type
Input Reflected Ripple Current	nominal Vin and full load		20mA _{p-p}	
Input Surge Voltage	Vin = 24V, 100ms max. Vin = 48V, 100ms max.			50VDC 100VDC
Start-up time	Power up Remote ON/OFF		20ms 20ms	
Operating Frequency Range		360kHz	400kHz	440kHz
Minimum Load ⁽⁵⁾		0%		
Optional Output Trim				±10%
Ripple and Noise	measured by 20MHz bandwidth with a 0.1µF/50V MLCC	3.3V 5.0V, 12V, 15V	60mV _{p-p} 75mV _{p-p}	
		Dual	100mV _{p-p}	
Remote ON/OFF ⁽⁶⁾	Positive Logic DC-DC ON DC-DC OFF		Open or 3.0V < Vr < 12V Short or 0V < Vr < 1.2V	
	Negative Logic DC-DC ON DC-DC OFF		Short or 0V < Vr < 1.2V Open or 3.0V < Vr < 12V	
Input current of Remote pin (CTRL)		DC-DC OFF	2mA	
		DC-DC ON	-0.5mA	0.5mA


Notes:

Note5: The RP20-FW series requires a minimum of 10% loading on the output to maintain specified regulation. Operation under no-load condition will not damage these devices, however they may not meet all listed specification.


Note6: The ON/OFF control function can be positive or negative logic. The pin voltage is referenced to -Vin pin.

RP20-2405SFW

Efficiency vs. Output Current

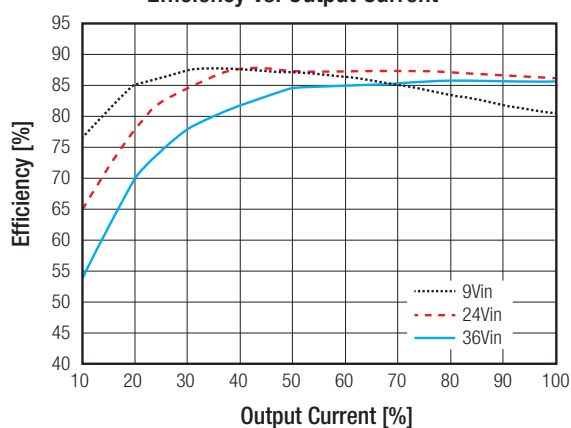



Efficiency vs. Input Voltage

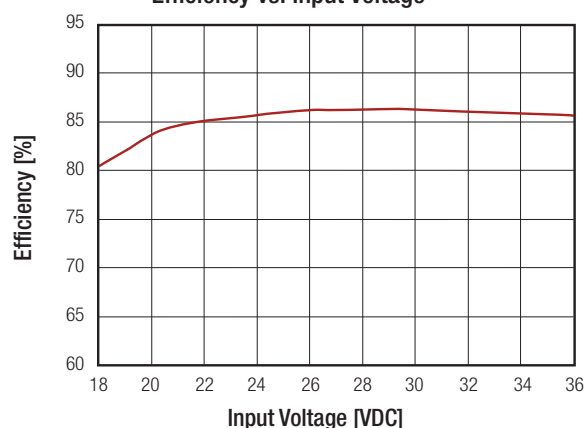

continued on next page

Specifications measured at $T_a = 25^\circ\text{C}$, nominal input voltage, full load otherwise noted

RP20-4805SFw

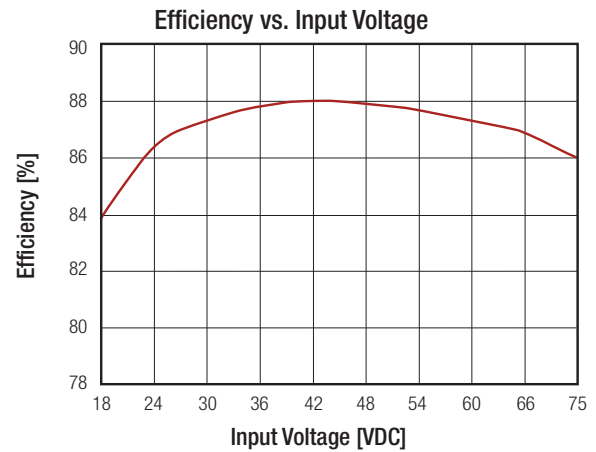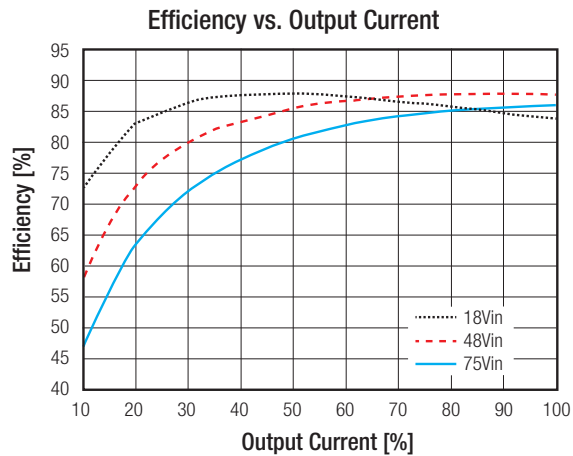


REGULATIONS

Parameter	Condition	Value
Output Voltage Accuracy		$\pm 1.0\%$
Voltage Adjustability	Single	$\pm 10\%$
Line Voltage Regulation	low line to high line at full load	Single $\pm 0.2\%$
		Dual $\pm 0.5\%$
Load Voltage Regulation	no load to full load	Single $\pm 0.5\%$
		Dual $\pm 1.0\%$
Cross Regulation	asymmetrical 25% <-> 100% load	$\pm 5\%$
Transient Response recovery time	25% load step change	250 μs

External Output Trimming

Output Voltage Trimming

Single output Powerline converters offer the feature of trimming the output voltage over a certain range around the nominal value by using external trim resistors. No general equation can be given for calculating the trim resistors, but the following trimtables give typical values for choosing these trimming resistors. If voltages between the given trim points are required, extrapolate between the two nearest given values to work out the resistor required or use a variable resistor to set the output voltage. Output can be externally trimmed by using the method shown below.

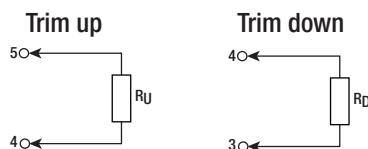

RP20-xx3.3SF

Trim up	1	2	3	4	5	6	7	8	9	10	%
V _{out} =	3.333	3.366	3.399	3.432	3.465	3.498	3.531	3.564	3.597	3.63	Volts
R _u =	57.93	26.16	15.58	10.28	7.11	4.99	3.48	2.34	1.46	0.75	KOhms
Trim down	1	2	3	4	5	6	7	8	9	10	%
V _{out} =	3.267	3.234	3.201	3.168	3.135	3.102	3.069	3.036	3.003	2.97	Volts
R _d =	69.47	31.23	18.49	12.12	8.29	5.74	3.92	2.56	1.50	0.65	KOhms

continued on next page

Specifications measured at $T_a = 25^\circ\text{C}$, nominal input voltage, full load otherwise noted

RP20-xx05SFW											
Trim up	1	2	3	4	5	6	7	8	9	10	%
V _{out} =	5.05	5.10	5.15	5.20	5.25	5.30	5.35	5.4	5.45	5.50	Volts
R _u =	36.57	16.58	9.92	6.58	4.59	3.25	2.30	1.59	1.03	0.59	KOhms
Trim down	1	2	3	4	5	6	7	8	9	10	%
V _{out} =	4.95	4.90	4.85	4.80	4.75	4.70	4.65	4.60	4.55	4.50	Volts
R _d =	45.53	20.61	12.31	8.15	5.66	4.00	2.81	1.92	1.23	0.68	KOhms
RP20-xx12SFW											
Trim up	1	2	3	4	5	6	7	8	9	10	%
V _{out} =	12.12	12.24	12.36	12.48	12.60	12.72	12.84	12.96	13.08	13.20	Volts
R _u =	367.91	165.95	98.64	64.98	44.78	31.32	21.70	14.49	8.88	4.39	KOhms
Trim down	1	2	3	4	5	6	7	8	9	10	%
V _{out} =	11.88	11.76	11.64	11.52	11.40	11.28	11.16	11.04	10.92	10.8	Volts
R _d =	460.99	207.95	123.60	81.42	56.12	39.25	27.20	18.16	11.13	5.51	KOhms
RP20-xx15SFW											
Trim up	1	2	3	4	5	6	7	8	9	10	%
V _{out} =	15.15	15.3	15.45	15.60	15.75	15.90	16.05	16.20	16.35	16.50	Volts
R _u =	404.18	180.59	106.06	68.80	46.44	31.53	20.88	12.90	6.69	1.72	KOhms
Trim down	1	2	3	4	5	6	7	8	9	10	%
V _{out} =	14.85	14.70	14.55	14.40	14.25	14.10	13.95	13.80	13.65	13.50	Volts
R _d =	499.82	223.41	131.27	85.20	57.56	39.14	25.97	16.10	8.42	2.282	KOhms

PROTECTIONS

Parameter	Condition		Value
Short Circuit Protection (SCP)			continuous, automatic recovery
Over Voltage Protection (OVP)	Zener Diode Clamp	3.3V _{out} 5V _{out} 12V _{out} 15V _{out}	3.9VDC typ. 6.2VDC typ. 15VDC typ. 18VDC typ.
Over Load Protection (OLP)	% of I _{out} rated		150% typ.
Isolation Voltage	I/P to O/P I/P to O/P to case		1.6kVDC/1 minute 1.6kVDC/1 minute
Isolation Resistance	500 VDC		1GΩ min.
Isolation Capacitance			1500pF max.

Notes:



Note7: This power module is not internally fused. An input line fuse must always be used.

Specifications measured at $T_a = 25^\circ\text{C}$, nominal input voltage, full load otherwise noted

ENVIRONMENTAL

Parameter	Condition	Value
Operating Temperature Range	without derating with derating	-40°C to $+72^\circ\text{C}$ -40°C to $+105^\circ\text{C}$
Maximum Case Temperature		$+105^\circ\text{C}$
Temperature Coefficient		$\pm 0.02\%/^\circ\text{C}$ max.
Thermal Impedance	Natural convection (20LFM) Natural convection (20LFM) with Heat-sink	$12^\circ\text{C}/\text{Watt}$ $10^\circ\text{C}/\text{Watt}$
Operating Humidity		5% - 95% RH
Thermal Shock		MIL-STD-810F
Vibration		MIL-STD-810F
MTBF	MIL-HDBK-217F Bellcore TR-NWT-000332 ⁽⁹⁾	1851×10^3 hours 2350×10^3 hours

Derating Graph⁽⁹⁾

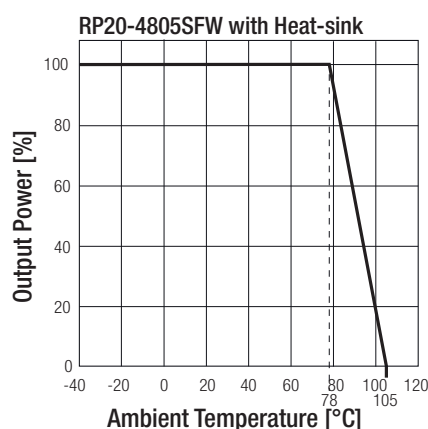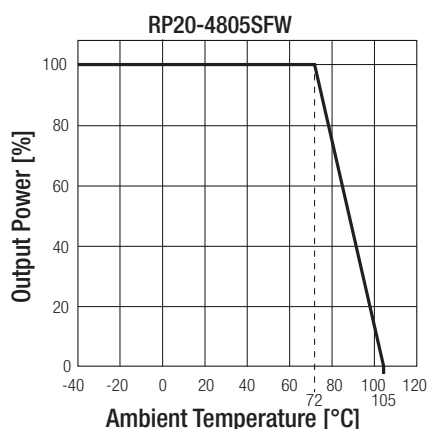

Notes:

Note8: BELLCORE TR-NWT-000332. Case I: 50% Stress, Temperature at 40°C (Ground fixed and controlled environment).

Note9: Derating graphs are valid only for the shown part numbers. If you need detailed derating-information about a part-number not shown here please contact our technical support service at techsupportAT@recom-power.com

SAFETY AND CERTIFICATIONS

Certificate Type (Safety)	Report / File Number	Standard
UL General Safety	E196683	UL60950-1 1st. Ed.: 2003 C22.2 No. 60950 1st. Ed.: 2003
EMC Compliance	Condition	Standard / Criterion
EMI Standard ⁽¹⁰⁾	with external filter	EN55022, Class A or B
ESD	Air $\pm 8\text{kV}$ and Contact $\pm 6\text{kV}$	EN61000-4-2, Criteria B
Radiated Immunity	10 V/m	EN61000-4-3, Criteria A
Fast Transient ⁽¹¹⁾	$\pm 2\text{kV}$	EN61000-4-4, Criteria B
Surge ⁽¹¹⁾	$\pm 1\text{kV}$	EN61000-4-5, Criteria A
Conducted Immunity	$10 \text{ V}_{\text{r.m.s}}$	EN61000-4-6, Criteria A

continued on next page



Specifications measured at $T_a = 25^\circ\text{C}$, nominal input voltage, full load otherwise noted

Notes:

Note10: The standard modules meet EMI Class A or Class B with external components, see filter suggestions below.



Note11: An external input filter capacitor is required if the module has to meet EN61000-4-4, EN61000-4-5. The filter capacitor Recom suggests: Nippon chemi-con KY series, 220 μF /100V

EMI Filtering Class A

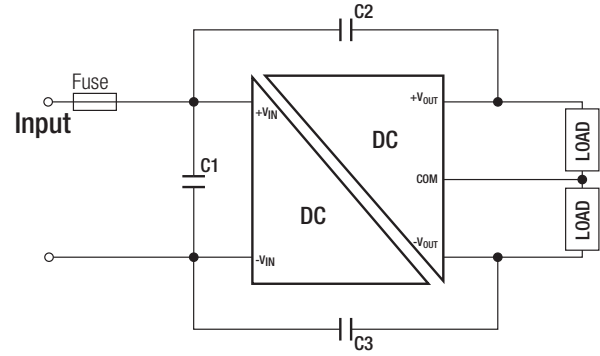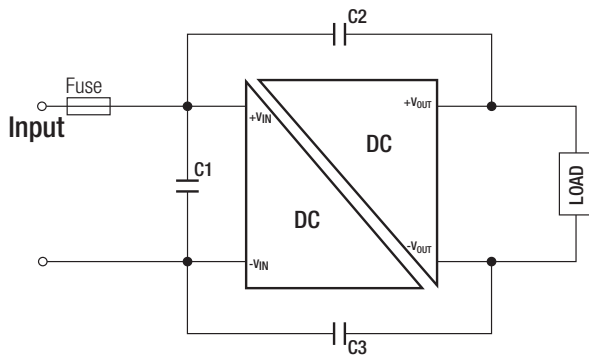

MODEL	C1	C2	C3
RP20-24xxSFW RP20-24xxDFW	N/A	1000pF/2kV 1808 MLCC	1000pF/2kV 1808 MLCC
RP20-48xxSFW RP20-48xxDFW	1 μF /100V 1210 MLCC	1000pF/2kV 1808 MLCC	1000pF/2kV 1808 MLCC

EMI Filtering Class B

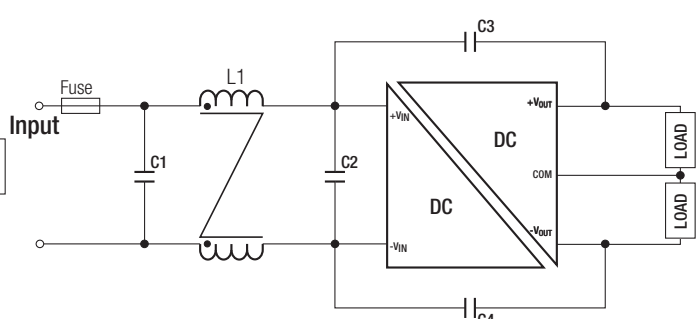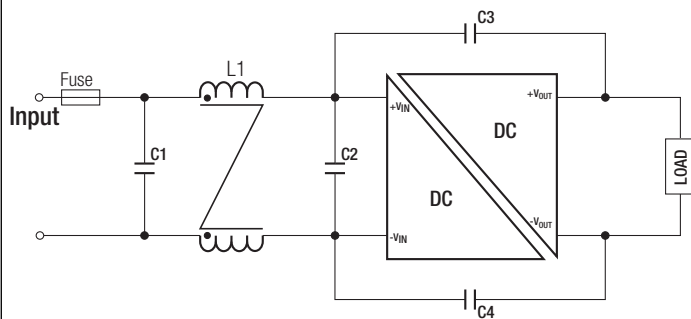

MODEL	C1	C2	C3/C4	L1
RP20-24xxSF RP20-24xxDF	4.7 μF /50V 1812 MLCC	N/A	1000pF/2kV 1808 MLCC	CMC: 450 μH ref.: WE 7448227005 ref.: CMC-05
RP20-48xxSF RP20-48xxDF	2.2 μF /100V 1812 MLCC	2.2 μF /100V 1812 MLCC	1000pF/2kV 1808 MLCC	CMC: 325 μH ref.: WE 744290321 ref.: CMC-06


DIMENSIONS and PHYSICAL CHARACTERISTICS

Parameter	Type	Value
Material	Case	Nickel coated copper
	Base	FR4 PCB
	Potting	Epoxy (UL94-V0)
Package Dimensions (LxWxH)	without Heat-sink	50.8 x 25.4 x 10.2mm
	with Heat-sink	56.8 x 25.4 x 16.8mm
Package Weight	without Heat-sink	27g
	with Heat-sink	37.89g


continued on next page

Specifications measured at $T_a = 25^\circ\text{C}$, nominal input voltage, full load otherwise noted

Dimension Drawing (mm)

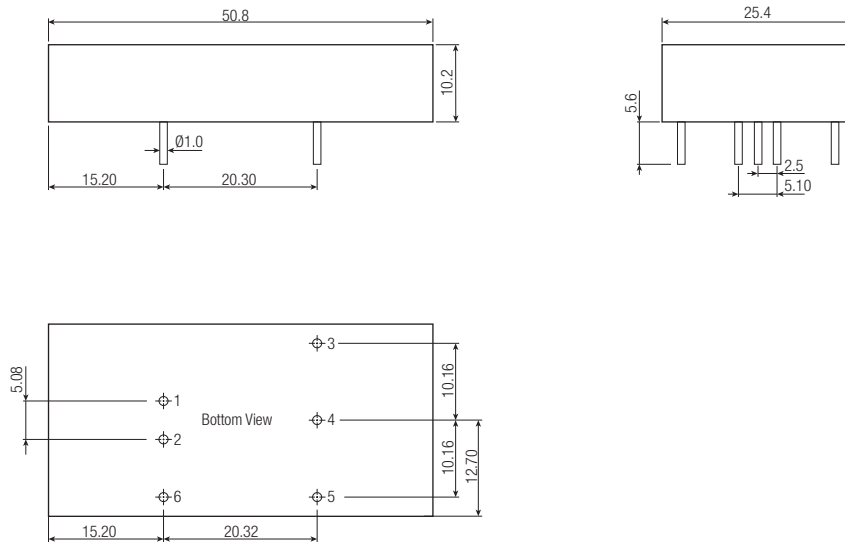

Dimension Drawing (mm) with Heat-sink

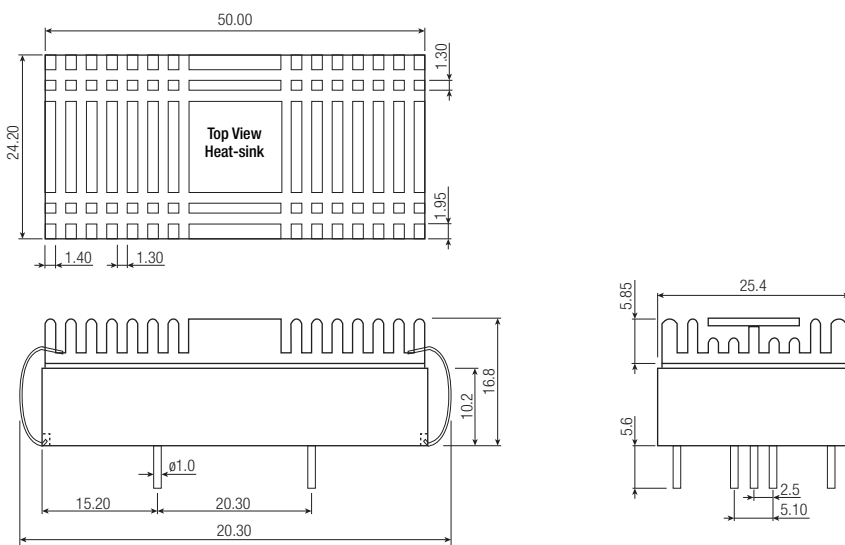

Pin Connections

Pin #	Single	Dual
1	+Vin	+Vin
2	-Vin	-Vin
3	+Vout	+Vout
4	Trim	Com
5	-Vout	-Vout
6	CTRL	CTRL

Pin Pitch Tolerance ± 0.25 mm
Pin Dimension Tolerance ± 0.1 mm
Tolerance: X.X ± 0.5 mm
X.XX ± 0.25 mm

PACKAGING INFORMATION

Parameter	Type		Value
Packaging Quantity	without Heat-sink	Tube	9pcs.
	with Heat-sink	Tray	20pcs.
Storage Temperature Range			-55°C to $+125^\circ\text{C}$
Storage Humidity			5% - 95% RH

The product information and specifications are subject to change without prior notice. RECOM products are not authorized for use in safety-critical applications (such as life support) without RECOM's explicit written consent. A safety-critical application is defined as an application where a failure of a RECOM product may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The buyer shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

RECOM:

[RP20-2405DFW](#) [RP20-2405DFW/N](#) [RP20-2405DFW/N-HC](#) [RP20-2405DFW-HC](#) [RP20-2405SFW](#) [RP20-2405SFW/N](#) [RP20-2405SFW/N-HC](#) [RP20-2405SFW-HC](#) [RP20-2412DFW](#) [RP20-2412DFW/N](#) [RP20-2412DFW/N-HC](#) [RP20-2412DFW-HC](#) [RP20-2412SFW](#) [RP20-2412SFW/N](#) [RP20-2412SFW/N-HC](#) [RP20-2412SFW-HC](#) [RP20-2415DFW](#) [RP20-2415DFW/N](#) [RP20-2415DFW/N-HC](#) [RP20-2415DFW-HC](#) [RP20-2415SFW](#) [RP20-2415SFW/N](#) [RP20-2415SFW/N-HC](#) [RP20-2415SFW-HC](#) [RP20-243.3SFW](#) [RP20-243.3SFW/N](#) [RP20-243.3SFW/N-HC](#) [RP20-243.3SFW-HC](#) [RP20-4805DFW](#) [RP20-4805DFW/N](#) [RP20-4805DFW/N-HC](#) [RP20-4805DFW-HC](#) [RP20-4805SFW](#) [RP20-4805SFW/N](#) [RP20-4805SFW/N-HC](#) [RP20-4805SFW-HC](#) [RP20-4812DFW](#) [RP20-4812DFW/N](#) [RP20-4812DFW/N-HC](#) [RP20-4812DFW-HC](#) [RP20-4812SFW](#) [RP20-4812SFW/N](#) [RP20-4812SFW/N-HC](#) [RP20-4812SFW-HC](#) [RP20-4815DFW](#) [RP20-4815DFW/N](#) [RP20-4815DFW/N-HC](#) [RP20-4815DFW-HC](#) [RP20-4815SFW](#) [RP20-4815SFW/N](#) [RP20-4815SFW/N-HC](#) [RP20-4815SFW-HC](#) [RP20-483.3SFW](#) [RP20-483.3SFW/N](#) [RP20-483.3SFW/N-HC](#) [RP20-483.3SFW-HC](#)