

Regulated Converters

- 4:1 Wide Input Voltage Range
- 1.6kVDC Isolation
- UL Certified
- Efficiency up to 91%
- Six-Sided Continuous Shield
- No Minimum Load Required



RP30-FW

30 Watt

2"x1"

Single & Dual Output



Selection Guide

Part Number	Input Voltage Range [VDC]	Output Voltage [VDC]	Output Current [mA]	Input ⁽¹⁾ Current [mA]	Efficiency ⁽¹⁾ typ. [%]	Max. Capacitive Load ⁽²⁾ [μF]
RP30-243.3SFW ^(4,5)	9-36	3.3	7500	1199	86	20000
RP30-2405SFW ^(4,5)	9-36	5	6000	1420	88	14400
RP30-2412SFW ^(4,5)	9-36	12	2500	1404	89	3000
RP30-2415SFW ^(4,5)	9-36	15	2000	1404	89	2000
RP30-483.3SFW ^(4,5)	18-75	3.3	7500	600	86	20000
RP30-4805SFW ^(4,5)	18-75	5	6000	710	88	14400
RP30-4812SFW ^(4,5)	18-75	12	2500	694	90	3000
RP30-4815SFW ^(4,5)	18-75	15	2000	687	91	2000
RP30-2405DFW ^(4,5)	9-36	±5	±3000	1420	88	±3000
RP30-2412DFW ^(4,5)	9-36	±12	±1250	1437	87	±2000
RP30-2415DFW ^(4,5)	9-36	±15	±1000	1437	87	±1300
RP30-4805DFW ^(4,5)	18-75	±5	±3000	710	88	±3000
RP30-4812DFW ^(4,5)	18-75	±12	±1250	710	88	±2000
RP30-4815DFW ^(4,5)	18-75	±15	±1000	710	88	±1300

Notes:


Note1: Maximum value at nominal input voltage and full load.

Note2: Test by minimum Vin and constant resistor load.



UL[®]
C **UL** US
E196683

Model Numbering

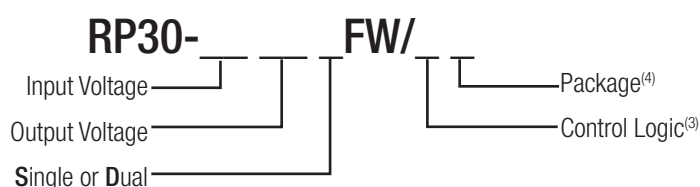

Ordering Examples

RP30-2405SFW = 24V Input, 5V Output, Positive Logic CTRL pin fitted

RP30-4812DFW/N-HC = 48V Input, $\pm 12V$ Output. Negative Logic CTRL pin fitted. Heat-sink fitted

Notes:

Note3: no suffix for CTRL function with Positive Logic (1=ON, 0=OFF)

add "N" for CTRL function with Negative Logic (0=ON, 1=OFF)

Note4: add suffix -HC for premounted Heat-sink and clips

UL60950-1 Certified

Specifications measured at $T_a = 25^\circ\text{C}$, nominal input voltage, full load otherwise noted

BASIC CHARACTERISTICS				
Parameter	Condition	Min.	Typ.	Max.
Input Voltage Range	nom. $V_{in} = 24\text{V}$ nom. $V_{in} = 48\text{V}$	9VDC 18VDC	24VDC 48VDC	36VDC 75VDC
Under Voltage Lockout (UVLO)	$V_{in} = 24\text{V}$ DC-DC ON DC-DC OFF		8VDC	9VDC
	$V_{in} = 48\text{V}$ DC-DC ON DC-DC OFF		16VDC	18VDC
Input Filter	Pi-Type			
Input Reflected Ripple Current ⁽⁵⁾	nominal V_{in} and full load		20mA _{p-p}	
Input Surge Voltage	$V_{in} = 24\text{V}$, 100ms max. $V_{in} = 48\text{V}$, 100ms max.			50VDC 100VDC
Start-up time	Power up Remote ON/OFF		30ms 30ms	
Operating Frequency Range		387kHz	430kHz	473kHz
Minimum Load		0%		
Ripple and Noise	20MHz bandwidth with a 1 μF /50V MLCC 3.3V _{out} , 5V _{out} 12V _{out} , 15V _{out}		100mV _{p-p} 150mV _{p-p}	
Remote ON/OFF ⁽⁶⁾	Positive Logic DC-DC ON DC-DC OFF	Open or $3.0\text{V} < V_r < 12\text{V}$ Short or $0\text{V} < V_r < 1.2\text{V}$		
	Negative Logic DC-DC ON DC-DC OFF	Short or $0\text{V} < V_r < 1.2\text{V}$ Open or $3.0\text{V} < V_r < 12\text{V}$		
Input current of Remote pin (CTRL)		DC-DC OFF	3mA	
		DC-DC ON	-0.5mA	0.5mA


Notes:

Note5: Simulated source impedance of 12 μH . 12 μH inductor in series with + V_{in} .


Note6: The ON/OFF control function can be positive or negative logic. The pin voltage is referenced - V_{in} pin.

RP30-2405SFW

Efficiency vs. Output Current

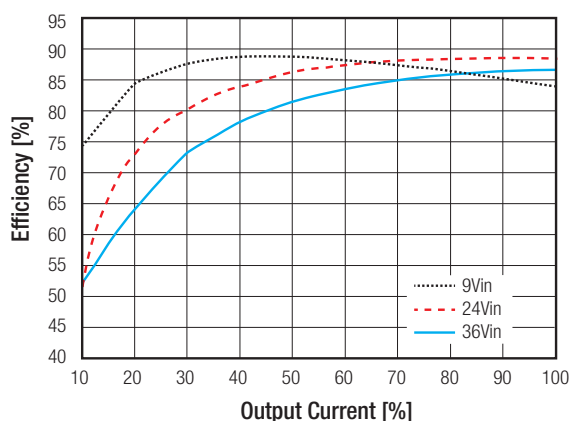

Efficiency vs. Input Voltage

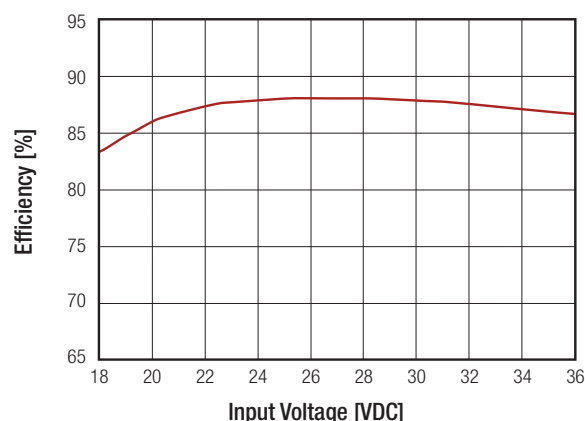


continued on next page


Specifications measured at $T_a = 25^\circ\text{C}$, nominal input voltage, full load otherwise noted

RP30-4805SFW

Efficiency vs. Output Current

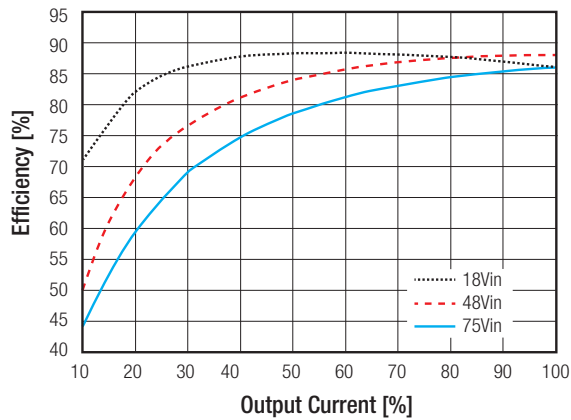

Efficiency vs. Input Voltage

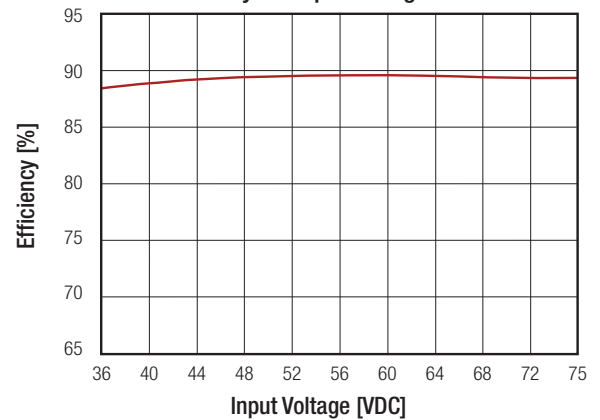


REGULATIONS

Parameter	Condition	Value
Output Voltage Accuracy		$\pm 1\%$ max.
Voltage Adjustability	Single	$\pm 10\%$ max.
Line Voltage Regulation	low line to high line at full load	$\pm 0.2\%$ max.
Load Voltage Regulation	no load to full load	Single Dual
		$\pm 0.5\%$ $\pm 1.0\%$
Cross Regulation	asymmetrical 25% <> 100% load	$\pm 5\%$
Transient Response recovery time	25% load step change	250 μs typ.

External Output Trimming

Output Voltage Trimming

Single output Powerline converters offer the feature of trimming the output voltage over a certain range around the nominal value by using external trim resistors. No general equation can be given for calculating the trim resistors, but the following trimtables give typical values for choosing these trimming resistors. If voltages between the given trim points are required, extrapolate between the two nearest given values to work out the resistor required or use a variable resistor to set the output voltage. Output can be externally trimmed by using the method shown below.

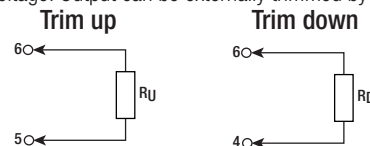

RP30-xx3.3SFW

Trim up	1	2	3	4	5	6	7	8	9	10	%
V _{out} =	3.333	3.366	3.399	3.432	3.465	3.498	3.531	3.564	3.597	3.63	Volts
R _U =	57.93	26.16	15.58	10.28	7.11	4.99	3.48	2.34	1.46	0.75	KOhms
Trim down	1	2	3	4	5	6	7	8	9	10	%
V _{out} =	3.267	3.234	3.201	3.168	3.135	3.102	3.069	3.036	3.003	2.97	Volts
R _D =	69.47	31.23	18.49	12.12	8.29	5.74	3.92	2.56	1.50	0.65	KOhms

RP30-xx05SFW

Trim up	1	2	3	4	5	6	7	8	9	10	%
V _{out} =	5.05	5.01	5.15	5.20	5.25	5.30	5.35	5.4	5.45	5.50	Volts
R _U =	36.57	16.58	9.92	6.58	4.59	3.25	2.30	1.59	1.03	0.59	KOhms
Trim down	1	2	3	4	5	6	7	8	9	10	%
V _{out} =	4.95	4.90	4.85	4.80	4.75	4.70	4.65	4.60	4.55	4.50	Volts
R _D =	45.53	20.61	12.31	8.15	5.66	4.00	2.81	1.92	1.23	0.68	KOhms

Specifications measured at Ta = 25°C, nominal input voltage, full load otherwise noted

RP30-xx12SFW											
Trim up	1	2	3	4	5	6	7	8	9	10	%
Vout =	12.12	12.24	12.36	12.48	12.60	12.72	12.84	12.96	13.08	13.20	Volts
R _u =	367.91	165.95	98.64	64.98	44.78	31.32	21.70	14.49	8.88	4.39	KOhms
Trim down	1	2	3	4	5	6	7	8	9	10	%
Vout =	11.88	11.76	11.64	11.52	11.40	11.28	11.16	11.04	10.92	10.8	Volts
R _p =	460.99	207.95	123.60	81.42	56.12	39.25	27.20	18.16	11.13	5.51	KOhms
RP30-xx15SFW											
Trim up	1	2	3	4	5	6	7	8	9	10	%
Vout =	15.15	15.3	15.45	15.60	15.75	15.90	16.05	16.20	16.35	16.50	Volts
R _u =	404.18	180.59	106.06	68.80	46.44	31.53	20.88	12.90	6.69	1.72	KOhms
Trim down	1	2	3	4	5	6	7	8	9	10	%
Vout =	14.85	14.70	14.55	14.40	14.25	14.10	13.95	13.80	13.65	13.50	Volts
R _p =	499.82	223.41	131.27	85.20	57.56	39.14	25.97	16.10	8.42	2.282	KOhms

PROTECTIONS

NOTES:

Parameter	Condition		Value
Short Circuit Protection (SCP)			continuous, automatic recovery
Over Voltage Protection (OVP)	Zener Diode Clamp	3.3Vout 5Vout 12Vout 15Vout	3.9VDC 6.2VDC 15VDC 18VDC
Over Load Protection (OLP)	% of Iout rated		150% typ.
Over Temperature Protection (OTP)			115°C typ.
Isolation Voltage	I/P to O/P I/P (O/P) to case		1.6kVDC/ 1 minute 1.6kVDC/ 1 minute
Isolation Resistance	500VDC		1GΩ min.
Isolation Capacitance			1500pF max.
Notes: Note7: This power module is not internally fused. An input line fuse must always be used.			



ENVIRONMENTAL

Parameter	Condition		Value
Operating Temperature Range	without derating with derating		-40°C to +62°C -40°C o +101°C
Maximum Case Temperature			+105°C max.
Temperature Coefficient			±0.02%/°C max.
Thermal Impedance	natural convection (20LFM) without Heat-sink natural convection (20LFM) with Heat-sink		12°C/Watt 10°C/Watt
Operating Humidity			5% - 95% RH
Thermal Shock			MIL-STD-810F
Vibration			MIL-STD-810F
MTBF	MIL-HDBK-217F Bellcore TR-NWT-000332®		1288 x 10 ³ hours 3163 x 10 ³ hours

continued on next page

Specifications measured at $T_a = 25^\circ\text{C}$, nominal input voltage, full load otherwise noted

Derating Graph⁽⁹⁾

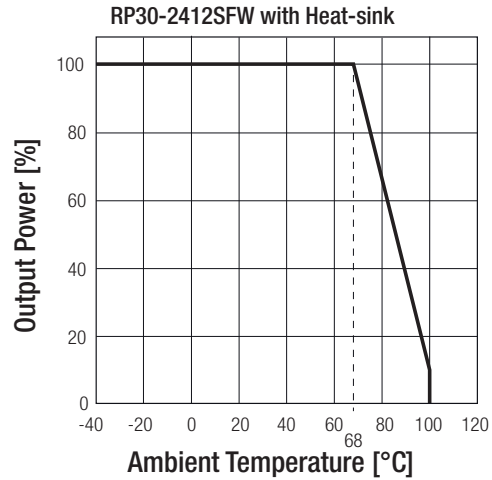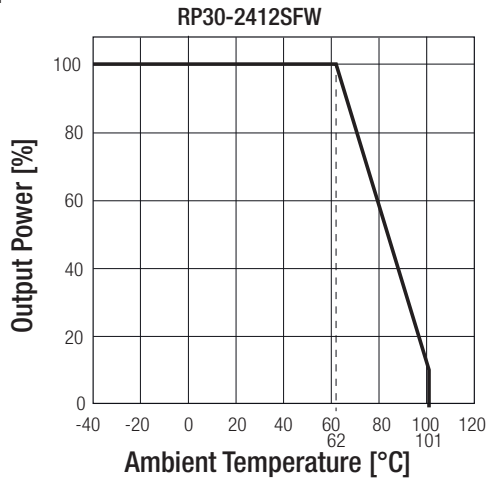

Notes:

Note8: BELLCORE TR-NWT-000332. Case I: 50% Stress, Temperature at 40°C (Ground fixed and controlled environment)
MIL-HDBK-217F Notice2 @ $T_A = 25^\circ\text{C}$, Full load (Ground, Benign, controlled environment)

Note9: Derating graphs are valid only for the shown part numbers. If you need detailed derating-information about a part-number not shown here please contact our technical support service at techsupportAT@recom-power.com

SAFETY AND CERTIFICATIONS



Certificate Type (Safety)	Report / File Number	Standard
UL General Safety	E196683	UL60950-1 1st. Ed.: 2003 C22.2 No. 60950 1st. Ed.: 2003
EMC Compliance	Condition	Standard / Criterion
EMI Standard ⁽¹⁰⁾	with external filter	EN55022, Class A or B
ESD	Air $\pm 8\text{kV}$ and Contact $\pm 6\text{kV}$	EN61000-4-2, Criteria A
Radiated Immunity	10 V/m	EN61000-4-3, Criteria A
Fast Transient ⁽¹¹⁾	$\pm 2\text{kV}$	EN61000-4-4, Criteria A
Surge ⁽¹¹⁾	$\pm 1\text{kV}$	EN61000-4-5, Criteria A
Conducted Immunity	10 Vr.m.s	EN61000-4-6, Criteria A

Notes:

Note10: The standard modules meet EMI Class A or Class B with external components, see filter suggestions below.

Note11: An external input filter capacitor is required if the module has to meet EN61000-4-4, EN61000-4-5. The filter capacitor Recom suggests: 12VDC & 24VDC input Nippon chemi-con KY series, 330 μF /50V
48VDC input Nippon chemi-con KY series, 220 μF /100V

EMI Filtering Class A

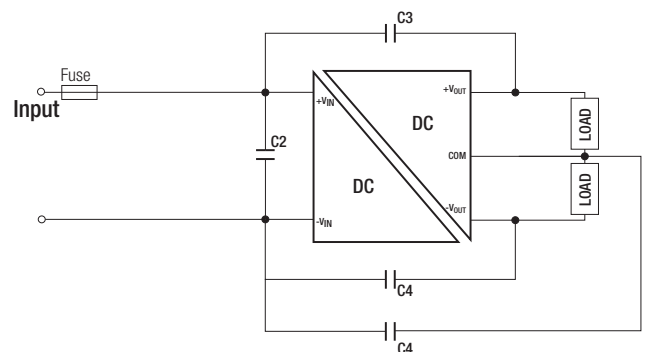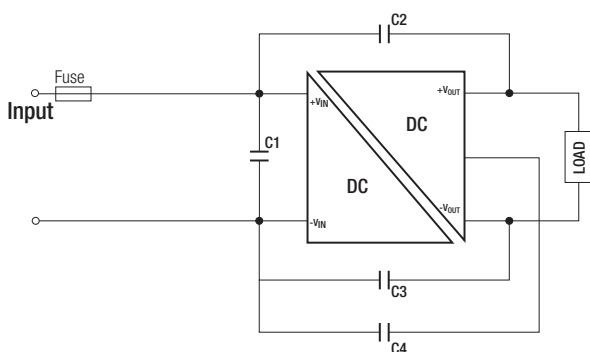


continued on next page

Specifications measured at $T_a = 25^\circ\text{C}$, nominal input voltage, full load otherwise noted

MODEL	C1	C2/C3/C4
RP30-24xxSFW	4.7 μF /50V	1000pF/2kV
RP30-24xxDFW	1812 MLCC	1808 MLCC
RP30-48xxSFW	2.2 μF /100V	1000pF/2kV
RP30-48xxDFW	1812 MLCC	1808 MLCC

EMI Filtering Class B



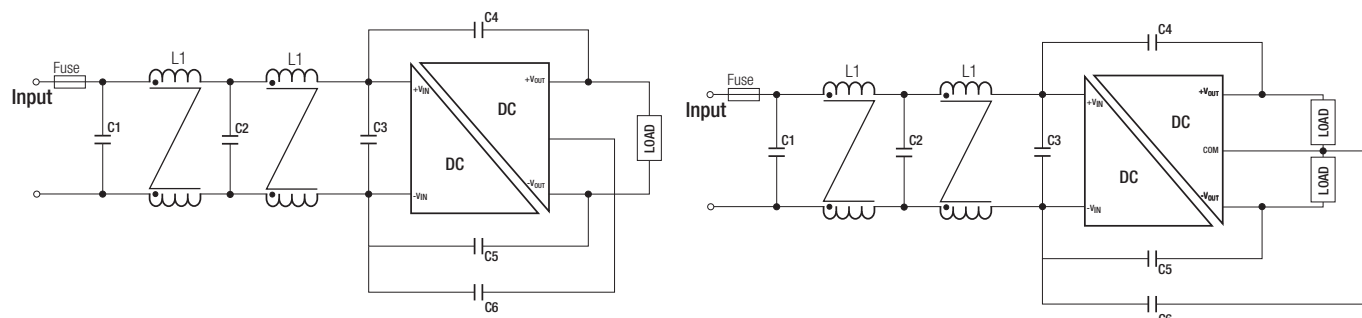


MODEL	C1/C2/C3	C4/C5/C6	L1	L2
RP30-24xxSFW	4.7 μF /50V	1000pF/2kV	CMC: 33.3 μH	CMC: 55 μH
RP30-24xxDFW	1812 MLCC	1808 MLCC	ref.: WE 744842932	ref.: WE 744290560
			ref.: CMC-09	ref.: CMC-10
RP30-48xxSFW	2.2 μF /100V	1000pF/2kV	CMC: 33.3 μH	CMC: 55 μH
RP30-48xxDFW	1812 MLCC	1808 MLCC	ref.: WE 744842932	ref.: WE 744290560
			ref.: CMC-09	ref.: CMC-10

DIMENSIONS and PHYSICAL CHARACTERISTICS

Parameter	Type	Value
Material	Case	Nickel coated copper
	Base	FR4 PCB
	Potting	Epoxy (UL94-V0)
Package Dimensions (LxWxH)	without Heat-sink	50.8 x 25.4 x 10.2mm
	with Heat-sink	56.8 x 25.4 x 16.8mm
Package Weight	without Heat-sink	30.5g
	with Heat-sink	41.39g

Dimension Drawing (mm)

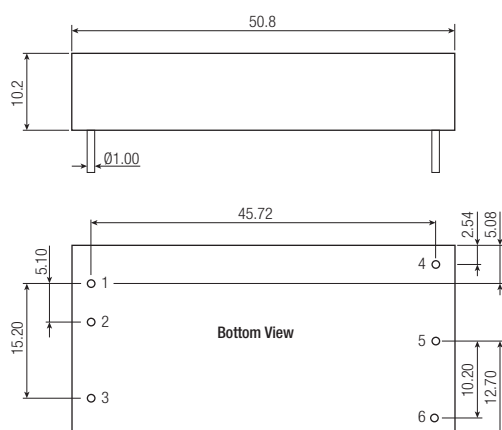

Pin Connections


Pin #	Single	Dual
1	+Vin	+Vin
2	-Vin	-Vin
3	CTRL	CTRL
4	+Vout	+Vout
5	-Vout	Com
6	Trim	-Vout

Pin Pitch Tolerance $\pm 0.25\text{mm}$
Pin dimension tolerance $\pm 0.1\text{mm}$
Tolerance: X.X $\pm 0.5\text{mm}$
X.XX $\pm 0.25\text{mm}$

continued on next page

Specifications measured at $T_a = 25^\circ\text{C}$, nominal input voltage, full load otherwise noted

Dimension Drawing (mm) with Heat-sink

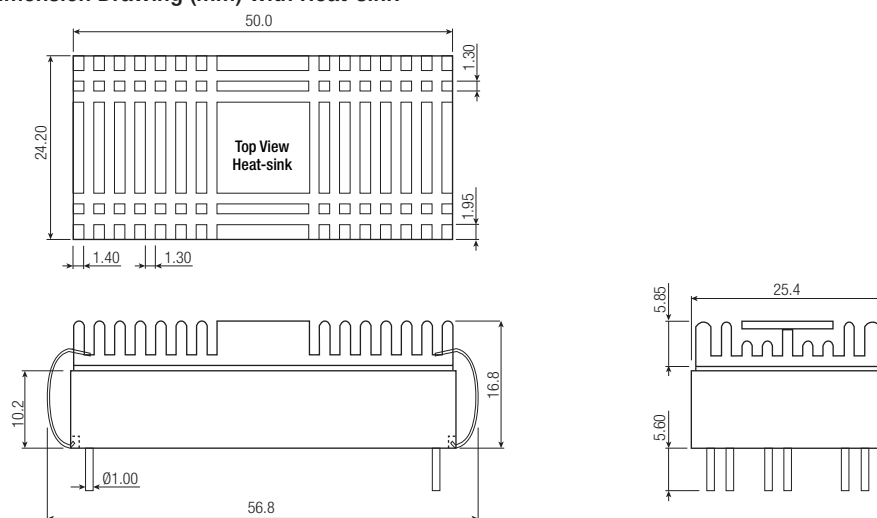

PACKAGING INFORMATION

Parameter	Type		Value
Packaging Quantity	without Heat-sink	Tube	9pcs.
	with Heat-sink	Tray	20pcs.
Storage Temperature Range			-55°C to $+125^\circ\text{C}$
Storage Humidity			5% - 95% RH

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

RECOM:

[RP30-2405DFW](#) [RP30-2405DFW/N](#) [RP30-2405DFW/N-HC](#) [RP30-2405DFW-HC](#) [RP30-2405SFW](#) [RP30-2405SFW/N](#) [RP30-2405SFW/N-HC](#) [RP30-2405SFW-HC](#) [RP30-2412DFW](#) [RP30-2412DFW/N](#) [RP30-2412DFW/N-HC](#) [RP30-2412DFW-HC](#) [RP30-2412SFW](#) [RP30-2412SFW/N](#) [RP30-2412SFW/N-HC](#) [RP30-2412SFW-HC](#) [RP30-2415DFW](#) [RP30-2415DFW/N](#) [RP30-2415DFW/N-HC](#) [RP30-2415DFW-HC](#) [RP30-2415SFW](#) [RP30-2415SFW/N](#) [RP30-2415SFW/N-HC](#) [RP30-2415SFW-HC](#) [RP30-243.3SFW](#) [RP30-243.3SFW/N](#) [RP30-243.3SFW/N-HC](#) [RP30-243.3SFW-HC](#) [RP30-4805DFW](#) [RP30-4805DFW/N](#) [RP30-4805DFW/N-HC](#) [RP30-4805DFW-HC](#) [RP30-4805SFW](#) [RP30-4805SFW/N](#) [RP30-4805SFW/N-HC](#) [RP30-4805SFW-HC](#) [RP30-4812DFW](#) [RP30-4812DFW/N](#) [RP30-4812DFW/N-HC](#) [RP30-4812DFW-HC](#) [RP30-4812SFW](#) [RP30-4812SFW/N](#) [RP30-4812SFW/N-HC](#) [RP30-4812SFW-HC](#) [RP30-4815DFW](#) [RP30-4815DFW/N](#) [RP30-4815DFW/N-HC](#) [RP30-4815DFW-HC](#) [RP30-4815SFW](#) [RP30-4815SFW/N](#) [RP30-4815SFW/N-HC](#) [RP30-4815SFW-HC](#) [RP30-483.3SFW](#) [RP30-483.3SFW/N](#) [RP30-483.3SFW/N-HC](#) [RP30-483.3SFW-HC](#)