






RECOMMENDED PANEL
MOUNTING



CIRCUIT: 2P, SPST
CONTACT CONFIGURATION
OFF (ON)

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 3A 125V, 1.5A 250V AC
5. CONTACT RESISTANCE: 50m ohm max.
6. INSULATION RESISTANCE: DC 500V 100M ohm min.
7. DIELECTRIC STRENGTHS: AC 1000V 1 minute
8. ACTUATOR COLOR: GREEN

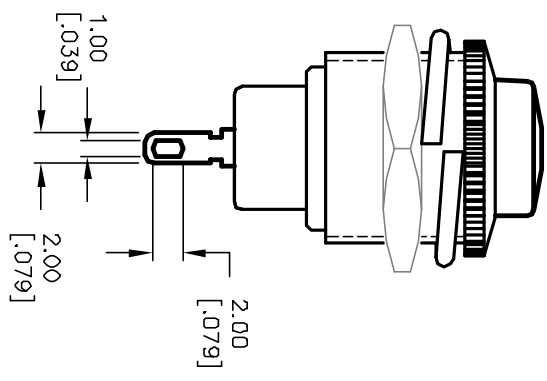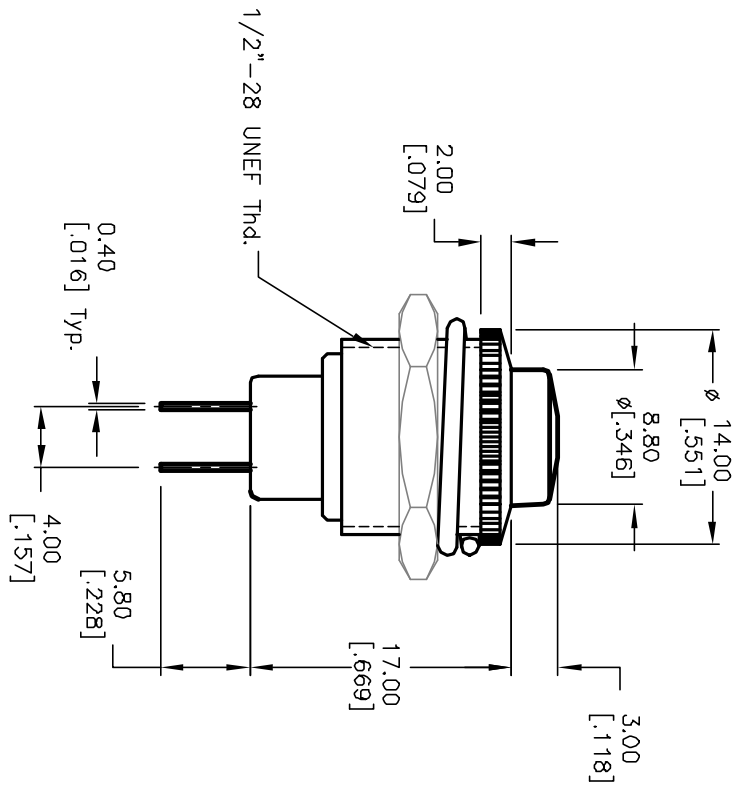

TITLE			
RP3502MA-GRN			
E-SWITCH®			
SCALE			
2:1		DATE	2/14/00
DR		MM	
DWG		F030016	
REV		A	

REV.		ECN No.	DESCRIPTION	DATE	CHKD
A		12156	REFER TO OLD TAB#F030015-A	5/21/02	CB

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[E-Switch:](#)

[RP3502MAGRN](#)