

# Features

## Regulated Converters

- 4:1 Wide Input Range
- 3kVAC Reinforced Insulation for 110Vin  
2.25kVDC Basic Insulation for 24Vin & 48Vin
- Efficiency up to 91%
- No Minimum Load Required
- UL60950-1, EN50155 & IEC/EN60950-1 Certified

**RECOM**  
DC/DC Converter

## RP75H-RW

**75 Watt  
Half Brick  
Single Output**



### Description

The half-brick RP75H series DC/DC converters are designed for railway rolling stock and high voltage battery applications. Each series has three 4:1 input voltage range options to cover all input voltages from 9VDC up to 160VDC with isolated and regulated 5V to 48VDC outputs. The converters have high efficiencies and metal baseplates to permit a wide operating temperature range from -40°C to +85°C (when mounted on a suitable heatsink). The case is fitted with threaded inserts to allow secure mounting to the PCB or bulkhead for use in high shock and vibration environments. The converters are EN50155, UL60950 and IEC/EN60950 certified. The RP75H-RW series have a three year warranty.


### Selection Guide

| Part Number    | Input Voltage Range [VDC] | Output Voltage [VDC] | Output Current [mA] | Input <sup>(1)</sup> Current [mA] | Output Power [W] | Efficiency <sup>(1)</sup> typ. [%] | Max. Capacitive Load [μF] |
|----------------|---------------------------|----------------------|---------------------|-----------------------------------|------------------|------------------------------------|---------------------------|
| RP75H-2405SRW  | 9-36                      | 5                    | 15000               | 3551                              | 75               | 88                                 | 30000                     |
| RP75H-2412SRW  | 9-36                      | 12                   | 6300                | 3579                              | 75               | 88                                 | 5250                      |
| RP75H-2415SRW  | 9-36                      | 15                   | 5000                | 3551                              | 75               | 88                                 | 3330                      |
| RP75H-2424SRW  | 9-36                      | 24                   | 3200                | 3678                              | 75               | 87                                 | 1330                      |
| RP75H-2448SRW  | 9-36                      | 48                   | 1600                | 3678                              | 77               | 87                                 | 330                       |
| RP75H-4805SRW  | 18-75                     | 5                    | 15000               | 1736                              | 75               | 90                                 | 30000                     |
| RP75H-4812SRW  | 18-75                     | 12                   | 6300                | 1750                              | 75               | 90                                 | 5250                      |
| RP75H-4815SRW  | 18-75                     | 15                   | 5000                | 1755                              | 75               | 89                                 | 3330                      |
| RP75H-4824SRW  | 18-75                     | 24                   | 3200                | 1818                              | 75               | 88                                 | 1330                      |
| RP75H-4848SRW  | 18-75                     | 48                   | 1600                | 1839                              | 77               | 87                                 | 330                       |
| RP75H-11005SRW | 43-160                    | 5                    | 15000               | 749                               | 75               | 91                                 | 30000                     |
| RP75H-11012SRW | 43-160                    | 12                   | 6300                | 755                               | 75               | 91                                 | 5250                      |
| RP75H-11015SRW | 43-160                    | 15                   | 5000                | 749                               | 75               | 91                                 | 3330                      |
| RP75H-11024SRW | 43-160                    | 24                   | 3200                | 775                               | 75               | 90                                 | 1330                      |
| RP75H-11048SRW | 43-160                    | 48                   | 1600                | 775                               | 77               | 90                                 | 330                       |

#### Notes:

Note1: Efficiency is tested by nominal Vin, full load and at 25°C.

### Model Numbering

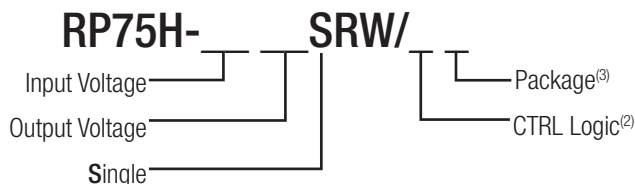

#### Ordering Examples

RP75H-2405SRW/N = 24V Input, 5V Output, Single, Neg. CTRL function

RP75H-11012SRW/P = 110V Input, 12V Output, Single, Pos. CTRL function

RP75H-11012SRW/P-HC = 110V Input, 12V Output, Single, Pos. CTRL function, with premounted Heat-sink

#### Notes:

Note2: standard part is with suffix "P" for positive logic (1=ON, 0=OFF)  
or add suffix "N" instead for negative logic (0=ON, 1=OFF)

Note3: add suffix "-HC" for premounted Heat-sink  
(compatible with all other suffixes)





**UL**  
cUL US  
E196683

EN50155 Certified  
IEC/EN60950-1 Certified  
UL60950-1 Certified

**Specifications** measured @ $t_a = 25^{\circ}\text{C}$ , resistive load, nominal  $V_{in}$  and rated  $I_{out}$  unless otherwise noted

| BASIC CHARACTERISTICS        |                                                                                                                                           |                                          |                                                    |                                             |                                              |
|------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|----------------------------------------------------|---------------------------------------------|----------------------------------------------|
| Parameter                    | Condition                                                                                                                                 |                                          | Min.                                               | Typ.                                        | Max.                                         |
| Internal Input Filter        | Pi-Type                                                                                                                                   |                                          |                                                    |                                             |                                              |
| Input Voltage Range          | nom Vin = 24V<br>nom Vin = 48V<br>nom Vin = 110V                                                                                          |                                          | 9VDC<br>18VDC<br>43VDC                             | 24VDC<br>48VDC<br>110VDC                    | 36VDC<br>75VDC<br>160VDC                     |
| Input Surge Voltage          | Vin = 24V, 1s max.<br>Vin = 48V, 1s max.<br>Vin = 110V, 1s max.                                                                           |                                          |                                                    |                                             | 50VDC<br>100VDC<br>185VDC                    |
| Quiescent Current            | Vin = 24V<br>Vin = 48V<br>Vin = 110V                                                                                                      |                                          | 85mA<br>50mA                                       | 10mA                                        | 185mA<br>90mA                                |
| Start-up time                | Power up                                                                                                                                  | Vin = 110V<br>Vin = 24V, Vin = 48V       |                                                    | 60ms<br>25ms                                |                                              |
|                              | Remote ON/OFF                                                                                                                             | Vin = 110V<br>Vin = 24V, Vin = 48V       |                                                    | 60ms<br>25ms                                |                                              |
| Internal Operating Frequency |                                                                                                                                           |                                          | 270kHz                                             | 300kHz                                      | 330kHz                                       |
| Minimum Load                 |                                                                                                                                           |                                          | 0%                                                 |                                             |                                              |
| Ripple and Noise             | Measured by 20MHz BW<br>with a 4.7μF/50V X7R MLCC<br>with a 4.7μF/50V X7R MLCC<br>with a 4.7μF/50V X7R MLCC<br>with a 2.2μF/100V X7R MLCC | 5 Vout<br>12, 15Vout<br>24Vout<br>48Vout |                                                    | 75mVp-p<br>100mVp-p<br>200mVp-p<br>300mVp-p | 100mVp-p<br>125mVp-p<br>250mVp-p<br>350mVp-p |
| Under Voltage Lockout (UVLO) | Vin = 24V                                                                                                                                 | DC-DC ON<br>DC-DC OFF                    |                                                    | 7.5VDC                                      | 9VDC                                         |
|                              | Vin = 48V                                                                                                                                 | DC-DC ON<br>DC-DC OFF                    |                                                    | 16VDC                                       | 18VDC                                        |
|                              | Vin = 110V                                                                                                                                | DC-DC ON<br>DC-DC OFF                    |                                                    | 36VDC                                       | 43VDC                                        |
| ON/OFF Control               | Positive Logic                                                                                                                            | DC-DC ON<br>DC-DC OFF                    | Open or 3.0V < Vr < 12V<br>Short or 0V < Vr < 1.2V |                                             |                                              |
|                              | Negative Logic                                                                                                                            | DC-DC ON<br>DC-DC OFF                    | Short or 0V < Vr < 1.2V<br>Open or 3.0V < Vr < 12V |                                             |                                              |
| Input Current of CTRL pin    |                                                                                                                                           |                                          | -0.5mA                                             |                                             | 1mA                                          |
| Standby Current              |                                                                                                                                           |                                          |                                                    | 3mA                                         |                                              |
| Output Trim                  |                                                                                                                                           |                                          | -20%                                               |                                             | +10%                                         |
| Remote Sense                 | % of set Vout                                                                                                                             |                                          |                                                    |                                             | 10%                                          |





### RP75H-2405SRW

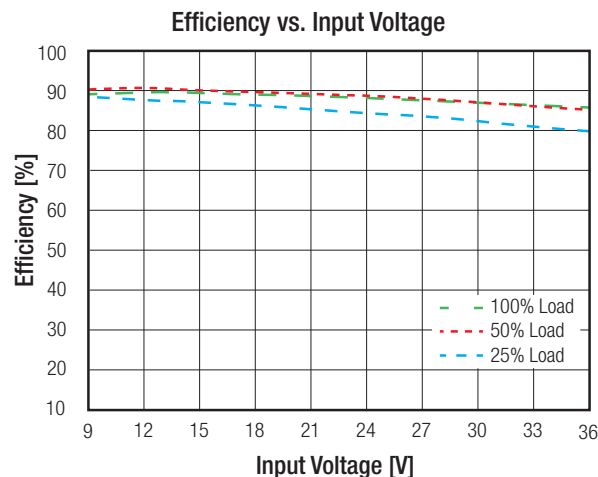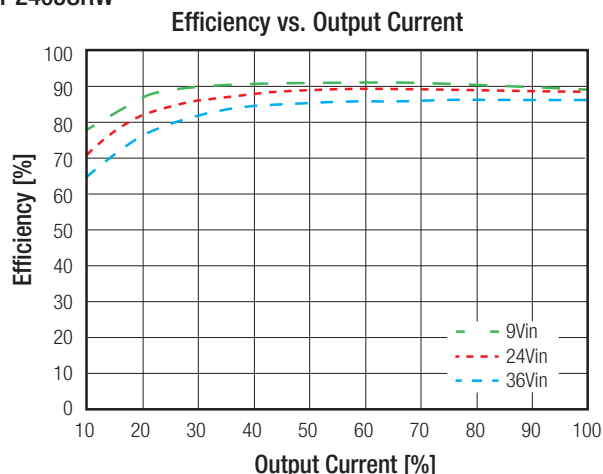



continued on next page

**Specifications** measured @ $t_a = 25^\circ\text{C}$ , resistive load, nominal  $V_{in}$  and rated  $I_{out}$  unless otherwise noted

### RP75H-2405SRW

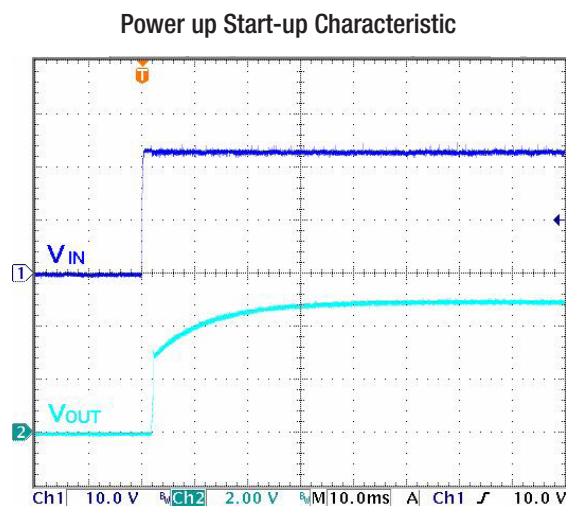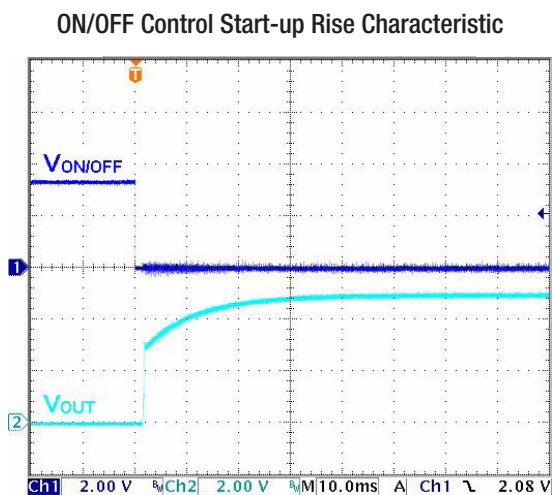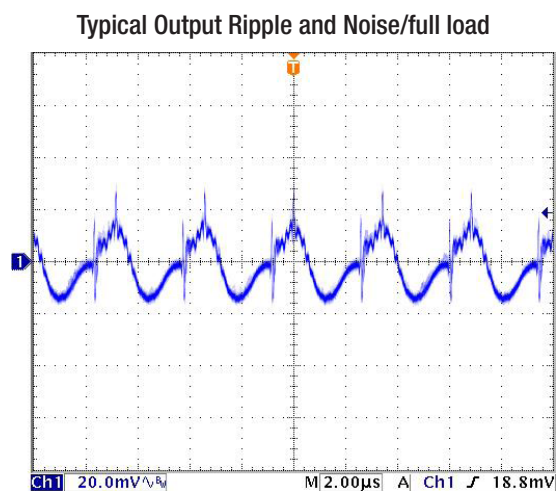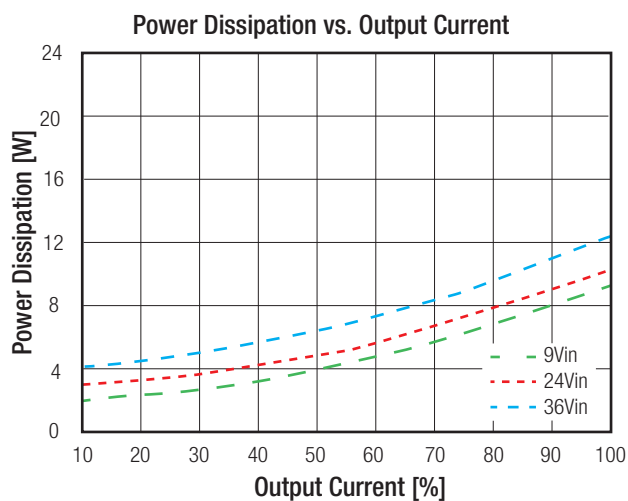

### RP75H-4805SRW

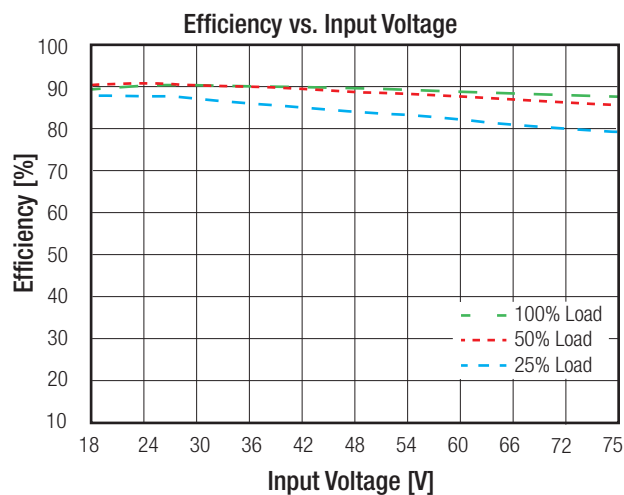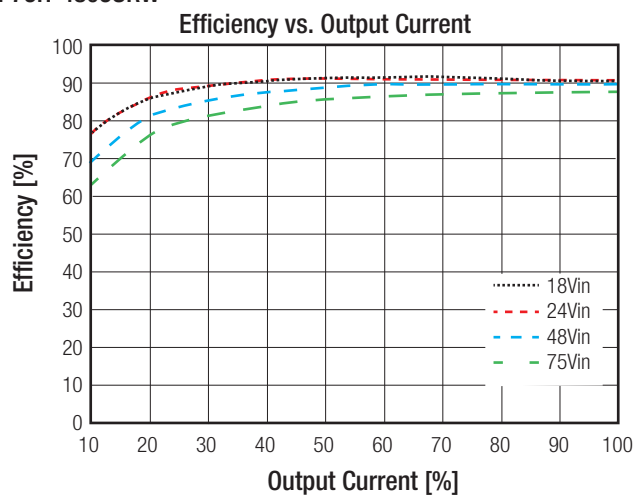


continued on next page


**Specifications** measured @ $t_a = 25^\circ\text{C}$ , resistive load, nominal  $V_{in}$  and rated  $I_{out}$  unless otherwise noted

### RP75H-4805SRW


Power Dissipation vs. Output Current

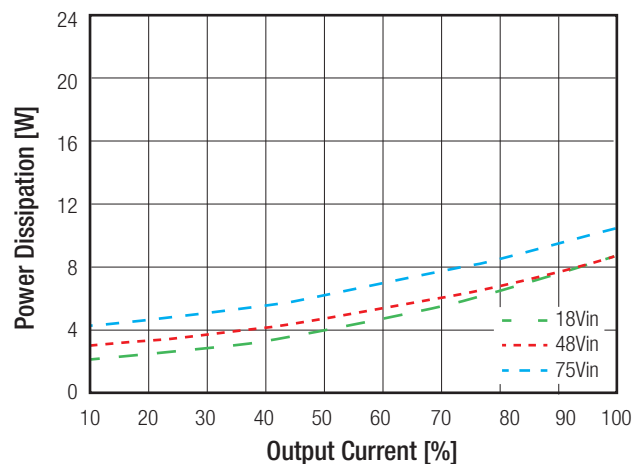


Typical Output Ripple and Noise/full load

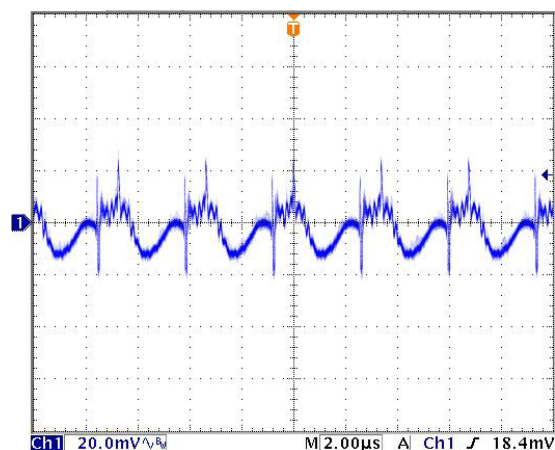

ON/OFF Control Start-up Rise Characteristic

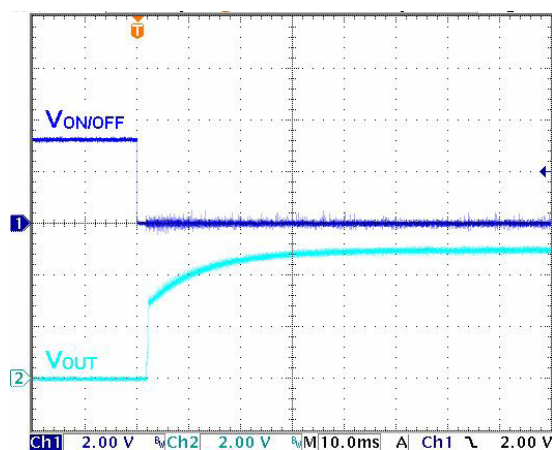


Power up Start-up Characteristic

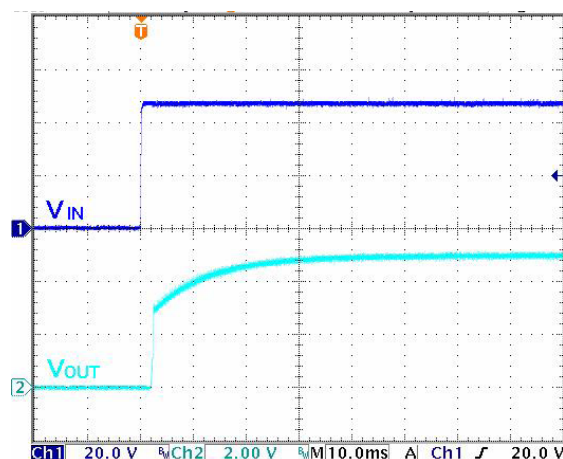


### RP75H-11005SRW

Efficiency vs. Output Current

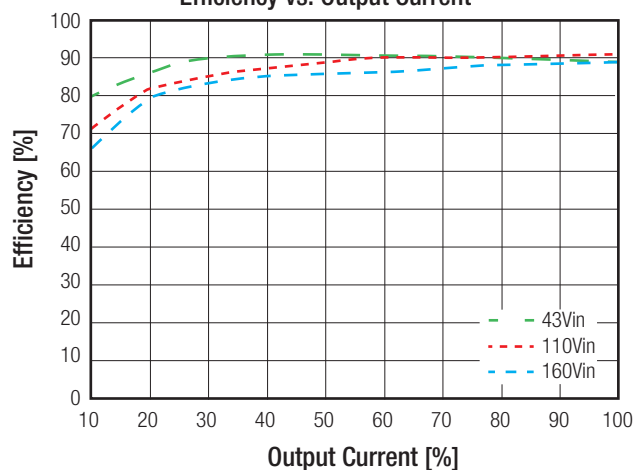

Efficiency vs. Input Voltage

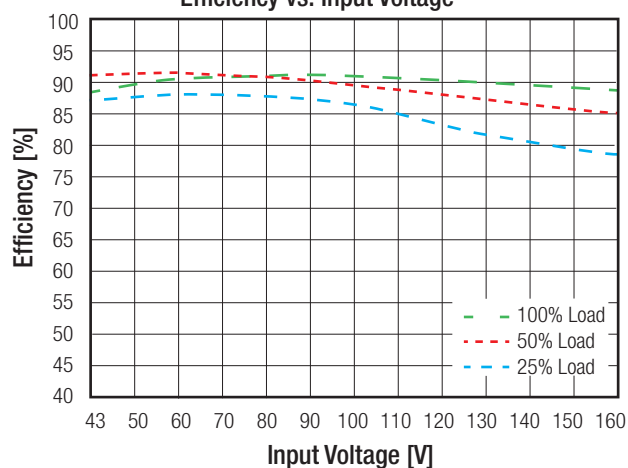


continued on next page


**Specifications** measured @ $t_a = 25^\circ\text{C}$ , resistive load, nominal  $V_{in}$  and rated  $I_{out}$  unless otherwise noted

### RP75H-11005SRW


Power Dissipation vs. Output Current

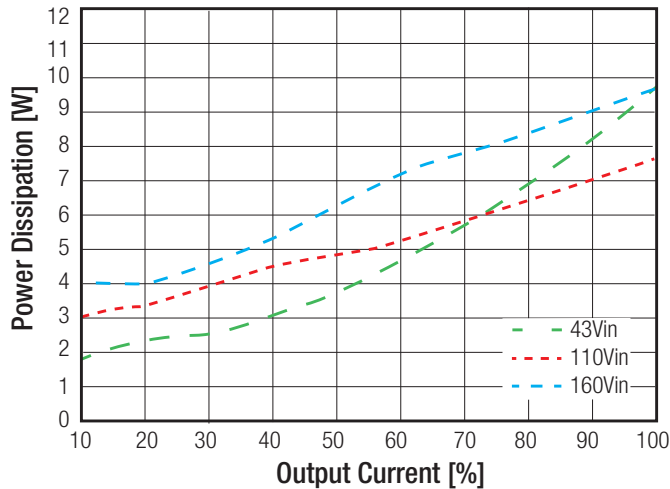


Typical Output Ripple and Noise/full load

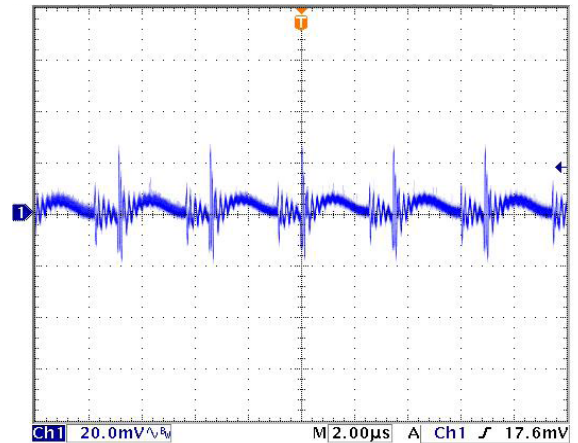

ON/OFF Control Start-up Rise Characteristic

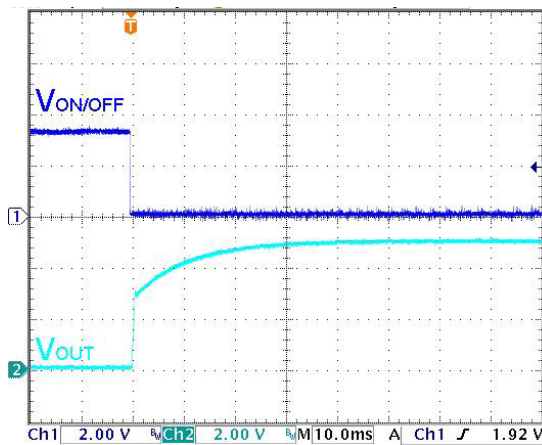


Power up Start-up Characteristic

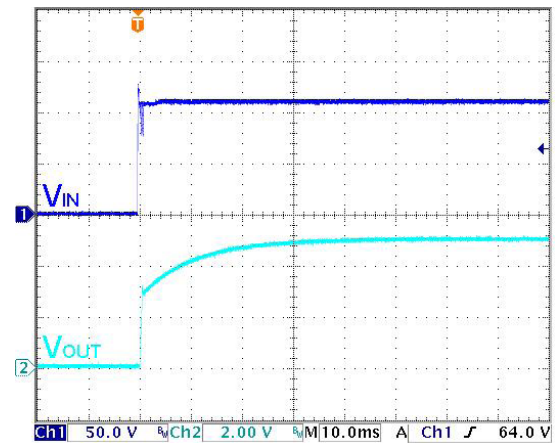

## OUTPUT TRIM

### Output Voltage Trimming

RP75H-RW converters offer the feature of trimming the output voltage over a certain range around the nominal value by using external trim resistors. The values for trim resistors shown in trim tables below are according to standard E96 values; therefore, the specified voltage may slightly vary; they also can be calculated with below shown equation.

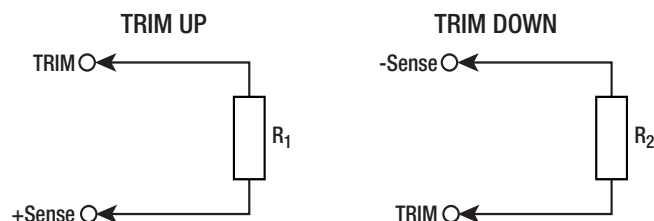

Specifications (measured @  $t_a = 25^\circ\text{C}$ , nominal input voltage, full load and after warm-up)

### OUTPUT TRIM

#### Trim Calculation

$$R_1 = \left[ \frac{100 \cdot V_{out} + \Delta V_{out} \cdot V_{out}}{1.225 \cdot \Delta V_{out}} - \frac{(100 + 2 \Delta V_{out})}{\Delta V_{out}} \right] \text{k}\Omega$$

$$R_2 = \left[ \frac{100}{\Delta V_{out}} - 2 \right] \text{k}\Omega$$

$V_{out}$  = Output Voltage  
 $\Delta V_{out}$  = Output Voltage Trim in %  
 $R_1$  = trim up resistor  
 $R_2$  = trim down resistor

#### Practical Example:

##### Trim Up:

$V_{out} = 5\text{V}$ ,  $\Delta V_{out} = 10\%$  (5.5V)

$$R_1 = \left[ \frac{100 \cdot V_{out} + \Delta V_{out} \cdot V_{out}}{1.225 \cdot \Delta V_{out}} - \frac{(100 + 2 \Delta V_{out})}{\Delta V_{out}} \right] \text{k}\Omega = \frac{100 \cdot 5 + 10 \cdot 5}{1.225 \cdot 10} - \frac{100 + 2 \cdot 10}{10} = 44.89 - 12 = 33.2 \text{k}\Omega$$

##### Trim down:

$V_{out} = 5\text{V}$ ,  $\Delta V_{out} = -10\%$  (4.5V)

$$R_2 = \left[ \frac{100}{\Delta V_{out}} - 2 \right] \text{k}\Omega = \frac{100}{10} - 2 = 8.06 \text{k}\Omega$$

#### RP75H-xx05SRW

| Trim up     | 1    | 2    | 3    | 4    | 5    | 6    | 7    | 8    | 9    | 10   | %     |
|-------------|------|------|------|------|------|------|------|------|------|------|-------|
| $V_{out} =$ | 5.05 | 5.10 | 5.15 | 5.20 | 5.25 | 5.30 | 5.35 | 5.4  | 5.45 | 5.50 | Volts |
| $R_1 =$     | 309  | 158  | 105  | 78.7 | 63.4 | 53.6 | 46.4 | 40.2 | 36.5 | 33.2 | KOhms |

#### RP75H-xx12SRW

| Trim up     | 1     | 2     | 3     | 4     | 5     | 6     | 7     | 8     | 9     | 10    | %     |
|-------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| $V_{out} =$ | 12.12 | 12.24 | 12.36 | 12.48 | 12.60 | 12.72 | 12.84 | 12.96 | 13.08 | 13.20 | Volts |
| $R_1 =$     | 887   | 453   | 301   | 226   | 182   | 154   | 133   | 118   | 105   | 95.3  | KOhms |

#### RP75H-xx15SRW

| Trim up     | 1     | 2     | 3     | 4     | 5     | 6     | 7     | 8     | 9     | 10    | %     |
|-------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| $V_{out} =$ | 15.15 | 15.30 | 15.45 | 15.60 | 15.75 | 15.90 | 16.05 | 16.20 | 16.35 | 16.50 | Volts |
| $R_1 =$     | 1130  | 576   | 383   | 294   | 237   | 196   | 169   | 150   | 137   | 124   | KOhms |

#### RP75H-xx24SRW

| Trim up     | 1     | 2     | 3     | 4     | 5     | 6     | 7     | 8     | 9     | 10    | %     |
|-------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| $V_{out} =$ | 24.24 | 24.48 | 24.72 | 24.96 | 25.20 | 25.44 | 25.68 | 25.92 | 26.16 | 26.40 | Volts |
| $R_1 =$     | 1870  | 953   | 634   | 487   | 392   | 324   | 280   | 249   | 226   | 205   | KOhms |

#### RP75H-xx48SRW

| Trim up     | 1     | 2     | 3     | 4     | 5     | 6     | 7     | 8     | 9     | 10    | %     |
|-------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| $V_{out} =$ | 48.48 | 48.96 | 49.44 | 49.92 | 50.40 | 50.88 | 51.36 | 51.84 | 52.32 | 52.80 | Volts |
| $R_1 =$     | 3830  | 1960  | 1300  | 988   | 806   | 681   | 576   | 511   | 464   | 422   | KOhms |


#### Trim Down all $V_{out}$ 's

| Trim down | 1    | 2    | 3    | 4    | 5    | 6    | 7    | 8    | 9    | 10   | %     |
|-----------|------|------|------|------|------|------|------|------|------|------|-------|
| $R_2 =$   | 97.6 | 47.5 | 31.6 | 23.2 | 17.8 | 14.7 | 12.1 | 10.5 | 9.09 | 8.06 | KOhms |
| Trim down | 11   | 12   | 13   | 14   | 15   | 16   | 17   | 18   | 19   | 20   | %     |
| $R_2 =$   | 7.15 | 6.34 | 5.76 | 5.11 | 4.64 | 4.22 | 3.92 | 3.57 | 3.24 | 3.01 | KOhms |

continued on next page

Specifications (measured @  $t_a = 25^\circ\text{C}$ , nominal input voltage, full load and after warm-up)

### Remote Sense

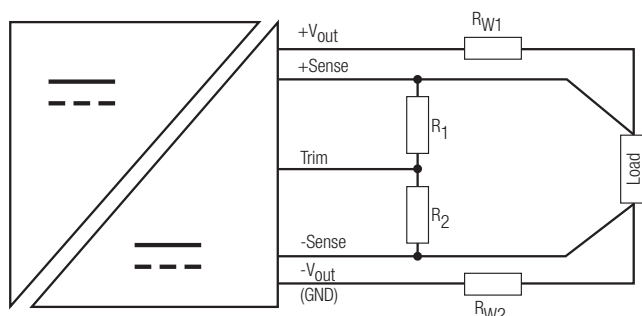

The output voltage can be adjusted by both trim and remote sense. The maximum combined adjustment range  $\pm 10\%$ . Derate the maximum output power if using the trim or sense function.


$R_{W1}$  ... wire losses +  
 $R_{W2}$  ... wire losses -  
 $R_1$  ... trim up resistor  
 $R_2$  ... trim down resistor

### REGULATIONS


| Parameter          | Condition                          | Value                                          |
|--------------------|------------------------------------|------------------------------------------------|
| Output Accuracy    |                                    | $\pm 1.0\%$                                    |
| Line Regulation    | low line to high line at full load | $\pm 0.1\%$                                    |
| Load Regulation    | 0% to 100% load                    | $\pm 0.1\%$                                    |
| Transient Response | 25% load step change               | 200 $\mu\text{s}$ typ.; 250 $\mu\text{s}$ max. |

### Transient Response to Dynamic Load Change from 100% to 75% to 100% of Full Load at nom. $V_{in}$


RP75H-2405SRW

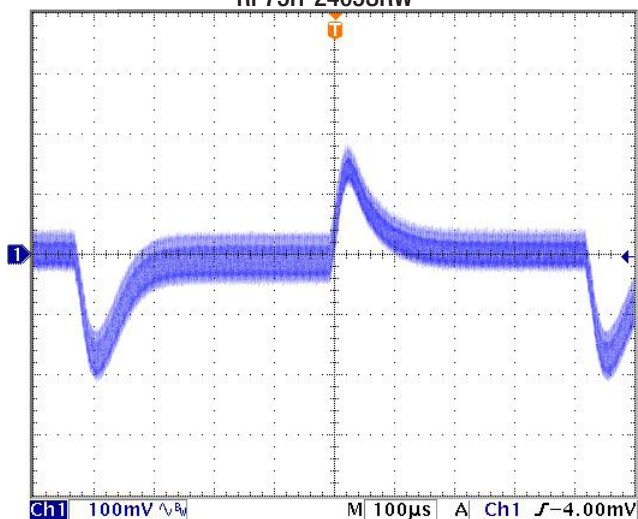

RP75H-4805SRW

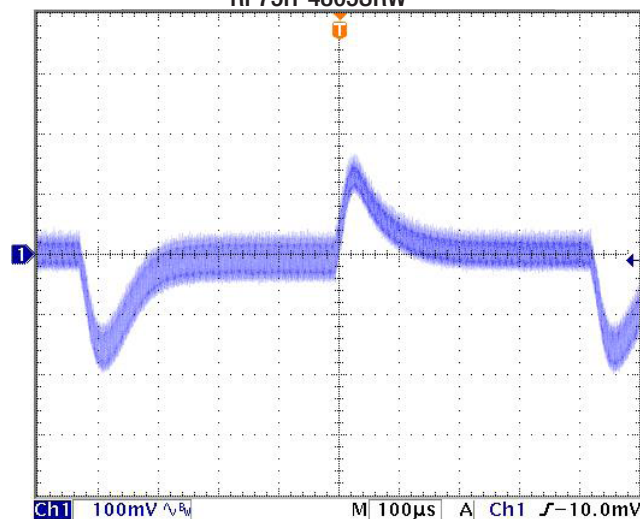

RP75H-11005SRW

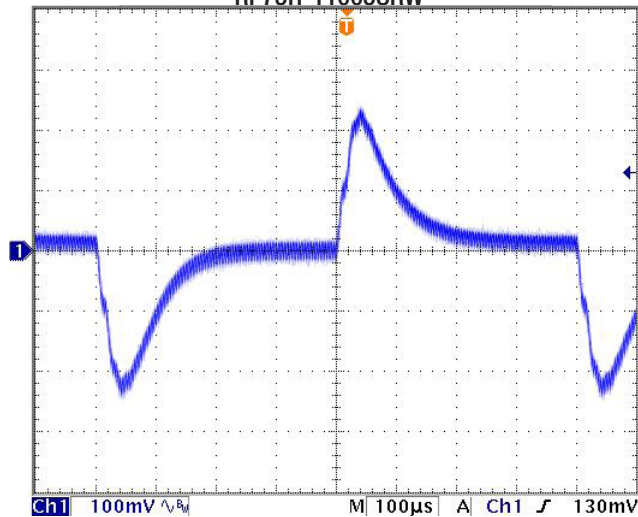

**Specifications** (measured @  $T_a = 25^\circ\text{C}$ , nominal input voltage, full load and after warm-up)

| PROTECTIONS                       |                         |                                                                              |
|-----------------------------------|-------------------------|------------------------------------------------------------------------------|
| Parameter                         | Condition               | Value                                                                        |
| Short Circuit Protection (SCP)    | below 100mΩ             | continuous, automatic recovery                                               |
| Over Voltage Protection (OVP)     | % of nom. Vout          | 115%-130%, Hiccup Mode                                                       |
| Over Load Protection (OLP)        | % Iout rated            | 24Vin, 48Vin<br>110Vin<br>120%-150%, Hiccup Mode<br>150% typ., Hiccup Mode   |
| Over Temperature Protection (OTP) |                         | +115°C                                                                       |
| Isolation Voltage                 | 110Vin                  | I/P to O/P<br>I/P or O/P to Baseplate<br>3kVAC/1minute<br>1.5kVAC/1minute    |
|                                   | 24Vin, 48Vin            | I/P to O/P<br>I/P or O/P to Baseplate<br>2.25kVDC/1minute<br>1.6kVDC/1minute |
| Isolation Resistance              | 500 VDC                 | 1GΩ min.                                                                     |
| Isolation Capacitance             |                         | 2500pF max.                                                                  |
| Isolation Grade                   | 24Vin, 48 Vin<br>110Vin | Basic Insulation<br>Reinforced Insulation                                    |

**Notes:**

Note4: An input fuse is required if the mains supply isn't over-current protected. Recommended fuse: T30A slow blow.

| ENVIRONMENTAL                       |                                                                                                                                         |                                       |
|-------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|
| Parameter                           | Condition                                                                                                                               | Value                                 |
| Operating Case Temperature Range    | Baseplate                                                                                                                               | -40°C to +105°C                       |
| Maximum Case Temperature            |                                                                                                                                         | 105°C                                 |
| Temperature Coefficient             |                                                                                                                                         | ±0.02%/°C max.                        |
| Thermal Impedance                   | vertical direction by natural convection (0.1m/s) without Heat-sink<br>vertical direction by natural convection (0.1m/s) with Heat-sink | 6.7°C/W<br>4.7°C/W                    |
| Operating Humidity                  |                                                                                                                                         | 5% - 95% RH                           |
| Pollution Degree                    | 24Vin, 48Vin<br>110Vin                                                                                                                  | PD1<br>PD2                            |
| Shock                               |                                                                                                                                         | according to EN61373 standard         |
| Thermal Shock                       |                                                                                                                                         | according to MIL-STD-810F standard    |
| Vibration                           |                                                                                                                                         | according to EN61373 standard         |
| Fire protection on railway vehicles |                                                                                                                                         | according to EN45545-2, 2013 standard |
| MTBF                                | according to MIL-HDBK-217F standard, 25°C                                                                                               | 336.2 x 10 <sup>3</sup> hours         |

### Thermal Calculation

$$R_{th\text{case-ambient}} = 6.7^\circ\text{C/W (vertical)}$$

$$R_{th\text{case-ambientHC}} = 4.7^\circ\text{C/W (vertical)}$$

$$R_{th\text{case-ambient}} = \frac{T_{\text{case}} - T_{\text{ambient}}}{P_{\text{dissipation}}}$$

$$P_{\text{dissipation}} = P_{\text{IN}} - P_{\text{OUT}} = \frac{P_{\text{OUTapp}}}{\eta} - P_{\text{OUTapp}}$$

|                             |   |                                             |
|-----------------------------|---|---------------------------------------------|
| $T_{\text{case}}$           | = | Case Temperature                            |
| $T_{\text{ambient}}$        | = | Environment Temperature                     |
| $P_{\text{dissipation}}$    | = | Internal losses                             |
| $P_{\text{IN}}$             | = | Input Power                                 |
| $P_{\text{OUT}}$            | = | Output Power                                |
| $\eta$                      | = | Efficiency under given Operating Conditions |
| $R_{th\text{case-ambient}}$ | = | Thermal Impedance                           |

### Practical Example:

Take the RP75H-2405SRW with 9V input Voltage and 50% load. What is the maximum ambient operating temperature? Use converter vertical in application without airflow.

$$\text{Eff}_{\text{min}} = 90\% @ V_{\text{nom}}$$

$$P_{\text{OUT}} = 75\text{W}$$

$$P_{\text{OUTapp}} = 75 \times 0.5 = 37.5\text{W}$$

$$\eta = 92\% \text{ (Efficiency vs. Load Graph)}$$

$$P_{\text{dissipation}} = \frac{37.5}{0.92} - 37.5 = 3.26\text{W}$$

#### without Heat-sink

$$R_{th} = \frac{T_{\text{casemax}} - T_{\text{amb}}}{P_{\text{dissipation}}} \rightarrow 6.7^\circ\text{C/W} = \frac{105 - T_{\text{amb}}}{3.26\text{W}}$$

$$T_{\text{amb}} = 83^\circ\text{C}$$

#### with Heat-sink

$$R_{thHC} = \frac{T_{\text{casemax}} - T_{\text{amb}}}{P_{\text{dissipation}}} \rightarrow 4.7^\circ\text{C/W} = \frac{105 - T_{\text{amb}}}{3.26\text{W}}$$







$$T_{\text{ambHC}} = 89^\circ\text{C}$$

continued on next page

Specifications (measured @  $t_a = 25^\circ\text{C}$ , nominal input voltage, full load and after warm-up)

### Derating Graph<sup>(5)</sup>

(@ Chamber and natural convection 0.1 m/s)

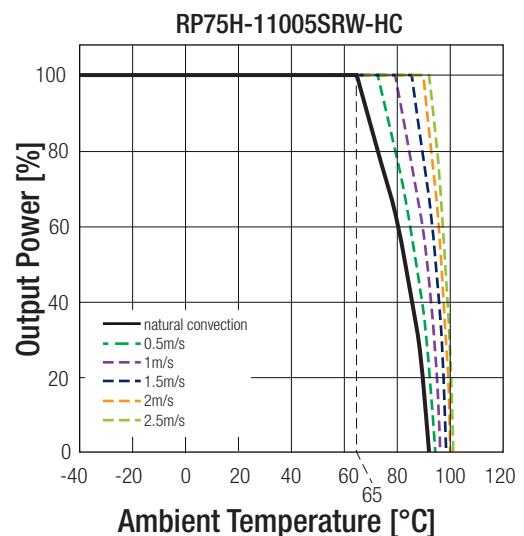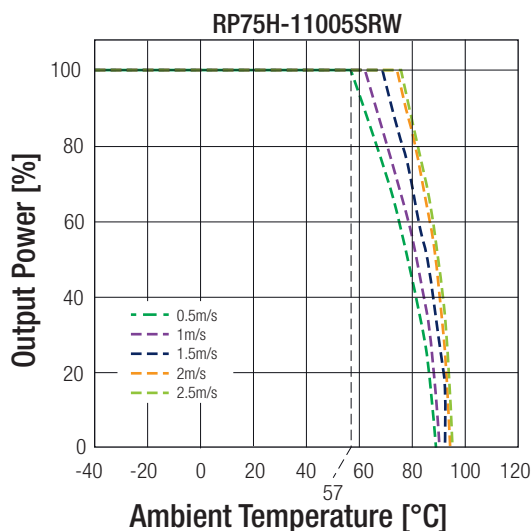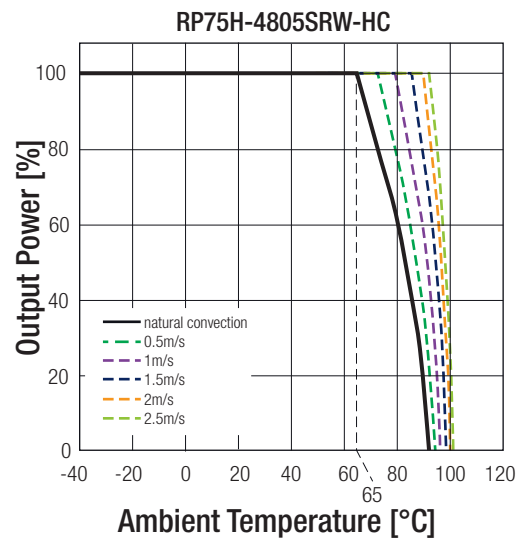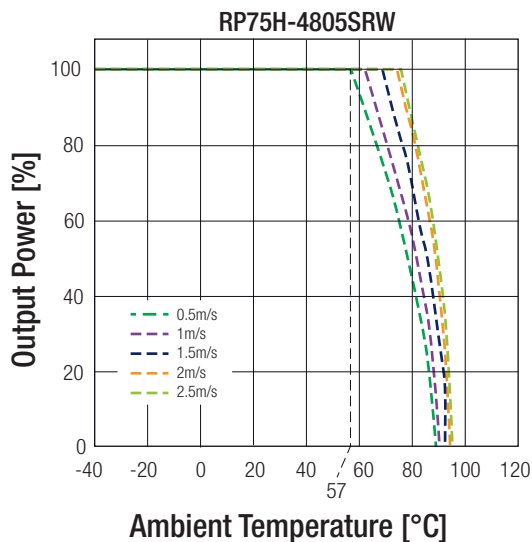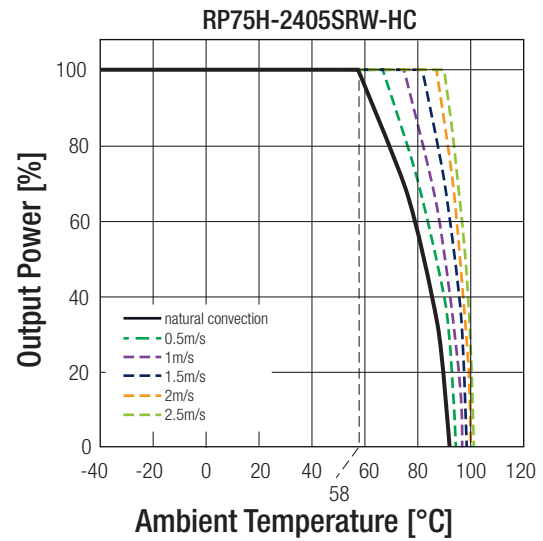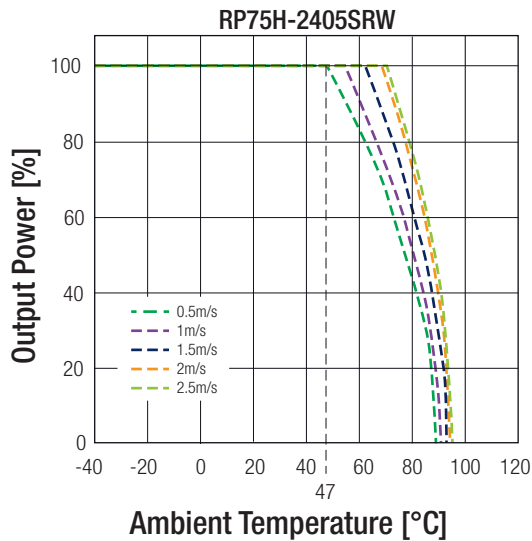

### Notes:

Note5: Derating graphs are valid only for the shown part numbers. If you need detailed derating-information about a part-number not shown here please contact our technical support service at [techsupportAT@recom-power.com](mailto:techsupportAT@recom-power.com)

Specifications (measured @  $t_a = 25^\circ\text{C}$ , nominal input voltage, full load and after warm-up)

### SAFETY AND CERTIFICATIONS

| Certificate Type (Safety)                                                 | Report / File Number         | Standard                                                                    |
|---------------------------------------------------------------------------|------------------------------|-----------------------------------------------------------------------------|
| Information Technology Equipment, General Requirements for Safety         | E196683                      | UL60950-1, 2nd Edition, 2014<br>CSA C22.2 No. 60950-1-07, 2nd Edition, 2014 |
| IEC/EN Information Technology Equipment - General Requirements for Safety | TW1608034-001, TW1608035-001 | IEC60950-1, 2nd Edition, 2005<br>EN60950-1, 2nd Edition, 2006               |
| Railway Applications - Electrical Equipment used on rolling stock         | 16A081501E-C                 | EN50155, 2007                                                               |

| EMI Compliance                                                                                                                 | Condition                                                                                                                                                                                           | Standard / Criterion         |
|--------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|
| Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement                       | 110Vin<br>with external components                                                                                                                                                                  | EN55022, Class A and Class B |
| Industrial, scientific and medical equipment - Radio frequency disturbance characteristics - Limits and methods of measurement |                                                                                                                                                                                                     | EN55011, Class A and Class B |
| Low-voltage power supplies DC output - Part 3: Electromagnetic compatibility (EMC)                                             | 24Vin, 48Vin<br>with external components                                                                                                                                                            | EN61204-3, Class B           |
| ESD Electrostatic discharge immunity test                                                                                      | Air $\pm 8\text{kV}$ and Contact $\pm 6\text{kV}$<br>20V/m (110Vin), 10V/m (24Vin, 48Vin)<br>$\pm 2\text{kV}$<br>EN55024 & EN50155 $\pm 2\text{kV}$ ( $\pm 1\text{kV}$ , 24Vin, 48Vin)<br>10 Vr.m.s | EN61000-4-2, Criteria A      |
| Radiated, radio-frequency, electromagnetic field immunity test                                                                 |                                                                                                                                                                                                     | EN61000-4-3, Criteria A      |
| Fast Transient and Burst Immunity <sup>(6)</sup>                                                                               |                                                                                                                                                                                                     | EN61000-4-4, Criteria A      |
| Surge Immunity <sup>(6)</sup>                                                                                                  |                                                                                                                                                                                                     | EN61000-4-5, Criteria A      |
| Immunity to conducted disturbances, induced by radio-frequency fields                                                          |                                                                                                                                                                                                     | EN61000-4-6, Criteria A      |


#### Notes:

Note6: An external input filter capacitor is required if the module has to meet EN61000-4-4 and EN61000-4-5.

The **24Vin** and **48Vin** version recommend 2pcs of aluminium electrolytic capacitor to connect in parallel.  
Recom suggest: 220 $\mu\text{F}$ /100V.

The **110Vin** version recommend 2pcs of aluminium electrolytic capacitor to connect in parallel.  
Recom suggest: 150 $\mu\text{F}$ /200V

### EMI Filtering according to EN61204-3 Class A and EN50121-1 (24Vin and 48Vin)

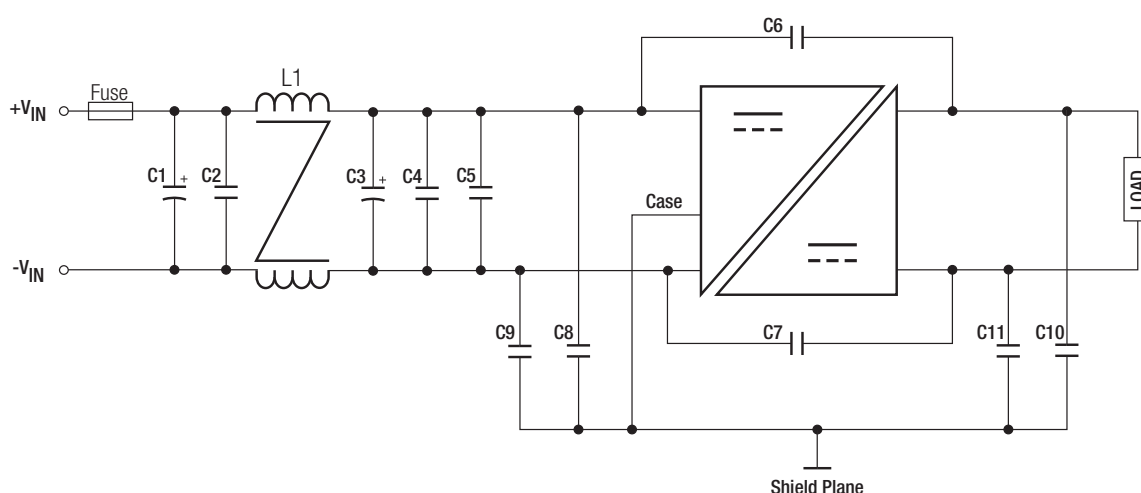


| MODEL         | C1, C3                                                  | C2, C4, C5                            | C6 to C11                | L1                       |
|---------------|---------------------------------------------------------|---------------------------------------|--------------------------|--------------------------|
| RP75H-24xxSRW | 100 $\mu\text{F}$ , 50V<br>Al Cap. Chemi-con KY Series  | 4.7 $\mu\text{F}$ , 50V<br>1812 MLCC  | 1000pF, 3kV<br>1808 MLCC | 156 $\mu\text{H}$<br>CMC |
| RP75H-48xxSRW | 100 $\mu\text{F}$ , 100V<br>Al Cap. Chemi-con KY Series | 2.2 $\mu\text{F}$ , 100V<br>1812 MLCC | 1000pF, 3kV<br>1808 MLCC | 620 $\mu\text{H}$<br>CMC |


continued on next page

Specifications (measured @  $t_a = 25^\circ\text{C}$ , nominal input voltage, full load and after warm-up)


RP75H-2405SRW

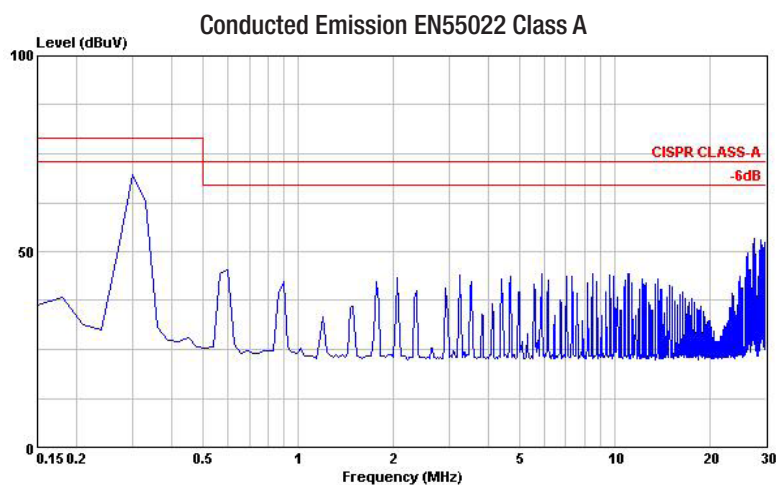

RP75H-4805SRW

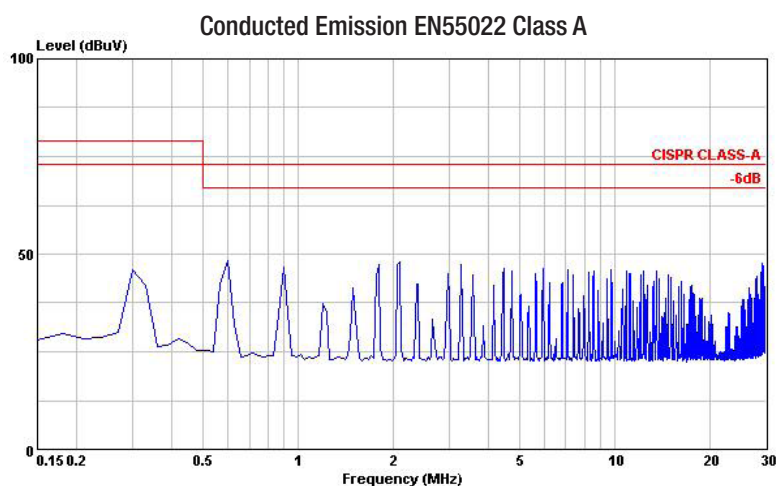

EMI Filtering according to EN55022/11 Class A and EN50121-1 (110Vin)

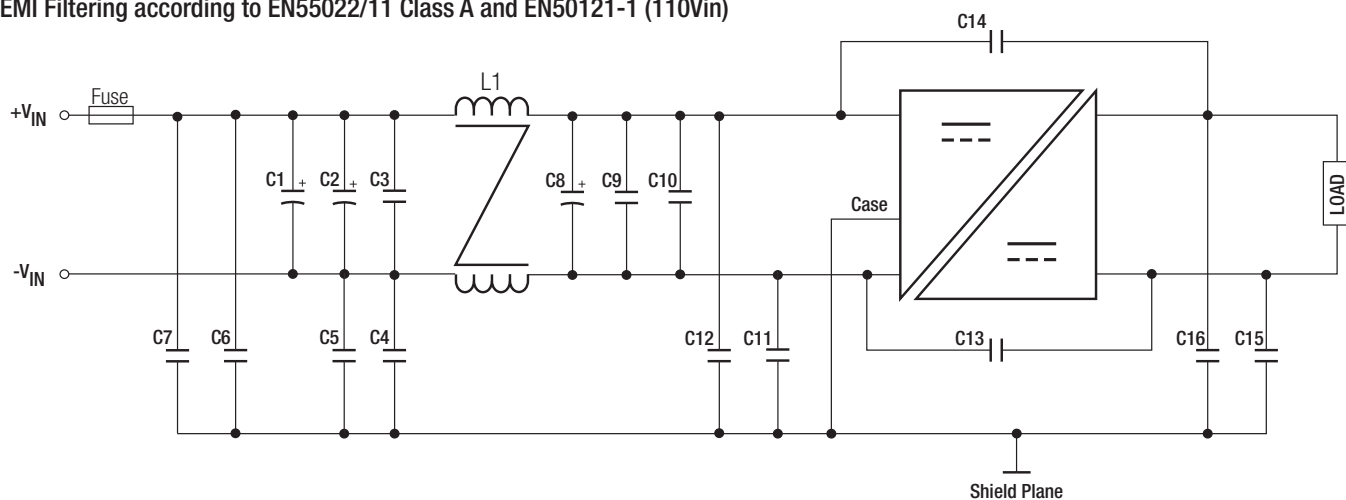


| MODEL                                 | C1, C8                                                            | C10                                 | C13, C14                        | C5, C15, C16             | L1                       |
|---------------------------------------|-------------------------------------------------------------------|-------------------------------------|---------------------------------|--------------------------|--------------------------|
| RP75H-110xxSRW                        | 150 $\mu\text{F}$ , 200V<br>Al Capacitor (lie down) Chemi-con KXJ | 1 $\mu\text{F}$ , 250V<br>1812 MLCC | 1000pF, 400VAC<br>TDK CD Series | 1000pF, 5kV<br>1808 MLCC | 521 $\mu\text{H}$<br>CMC |
| C2, C3, C4, C6, C7, C9, C11, C12: N/A |                                                                   |                                     |                                 |                          |                          |


continued on next page

Specifications (measured @  $t_a = 25^\circ\text{C}$ , nominal input voltage, full load and after warm-up)

### RP75H-11005SRW

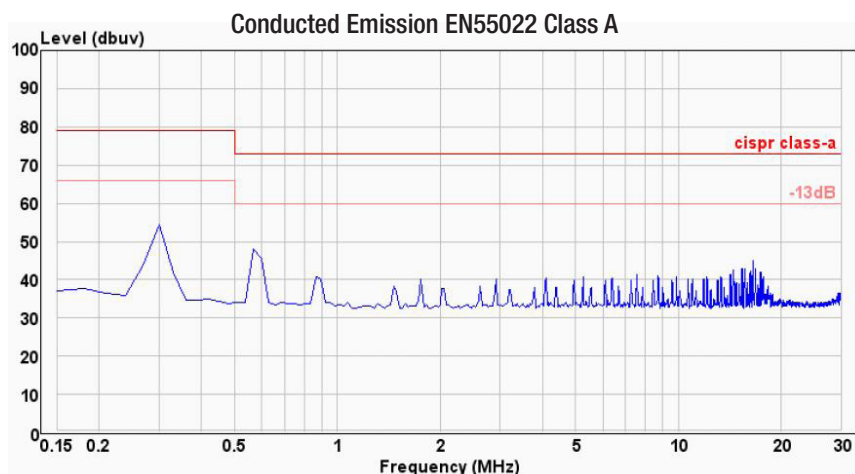


EMI Filtering according to EN61204-3 Class B (24Vin and 48Vin)

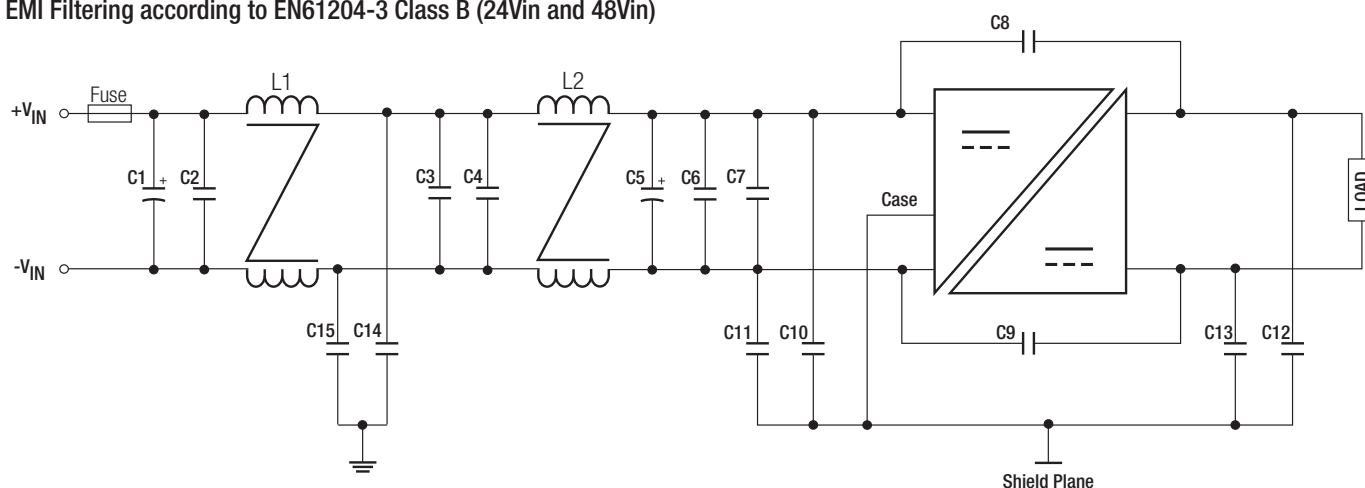

| MODEL         | C1, C5                                                      | C2, C3, C4, C6, C7                    | C8, C14, C15             | C9                       | C10 to C13             | L1                        | L2                       |
|---------------|-------------------------------------------------------------|---------------------------------------|--------------------------|--------------------------|------------------------|---------------------------|--------------------------|
| RP75H-24xxSRW | 100 $\mu\text{F}$ , 50V<br>Al Cap. (lie down) Chemi-con KY  | 4.7 $\mu\text{F}$ , 50V<br>1812 MLCC  | 1000pF, 3kV<br>1808 MLCC | 1000pF, 3kV<br>1808 MLCC | 10nF, 2kV<br>1812 MLCC | 305 $\mu\text{H}$<br>CMC  | 305 $\mu\text{H}$<br>CMC |
| RP75H-48xxSRW | 100 $\mu\text{F}$ , 100V<br>Al Cap. (lie down) Chemi-con KY | 2.2 $\mu\text{F}$ , 100V<br>1812 MLCC | 1000pF, 3kV<br>1808 MLCC | 4700pF, 3kV<br>1812 MLCC | 10nF, 2kV<br>1812 MLCC | 1186 $\mu\text{H}$<br>CMC | 156 $\mu\text{H}$<br>CMC |

### RP75H-2405SRW

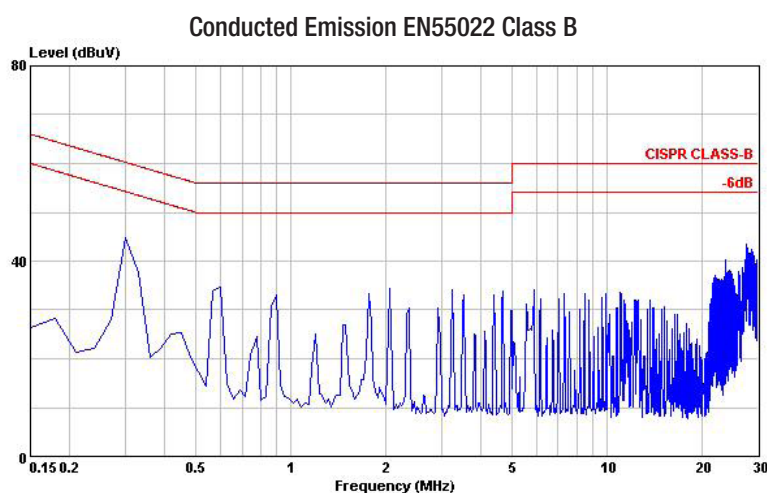


continued on next page


Specifications (measured @  $t_a = 25^\circ\text{C}$ , nominal input voltage, full load and after warm-up)

RP75H-4805SRW

Conducted Emission EN55022 Class B

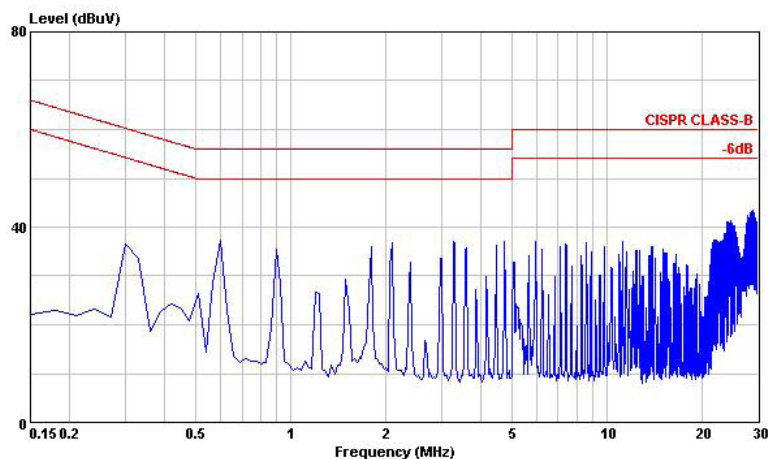


EMI Filtering according to EN55022/11 Class B (110Vin)

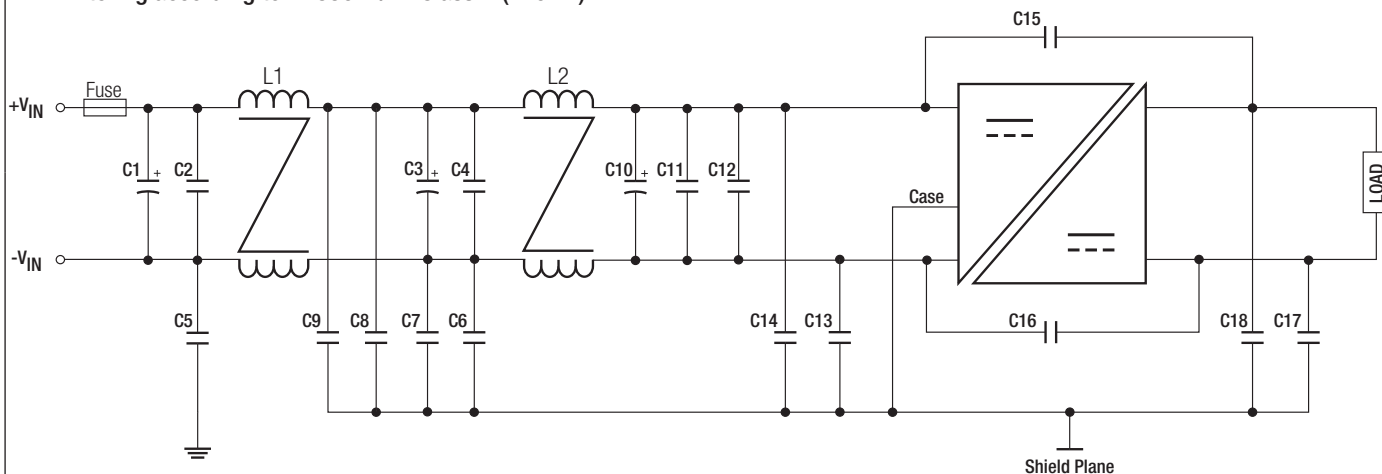

| MODEL                | C1, C3, C10                                        | C11, C12               | C13                     | C15, C16                           | C6, C7, C8, C9, C17, C18 | L1           | L2           |
|----------------------|----------------------------------------------------|------------------------|-------------------------|------------------------------------|--------------------------|--------------|--------------|
| RP75H-110xxSRW       | 150μF, 200V<br>Al Cap. (lie down)<br>Chemi-con KXJ | 1μF, 250V<br>1812 MLCC | 330pF, 5kV<br>1808 MLCC | 1000pF,<br>400VAC<br>TDK CD Series | 1000pF, 5kV<br>1808MLCC  | 305μH<br>CMC | 806μH<br>CMC |
| C2, C4, C5, C14: N/A |                                                    |                        |                         |                                    |                          |              |              |

RP75H-11005SRW

Conducted Emission EN55022 Class B

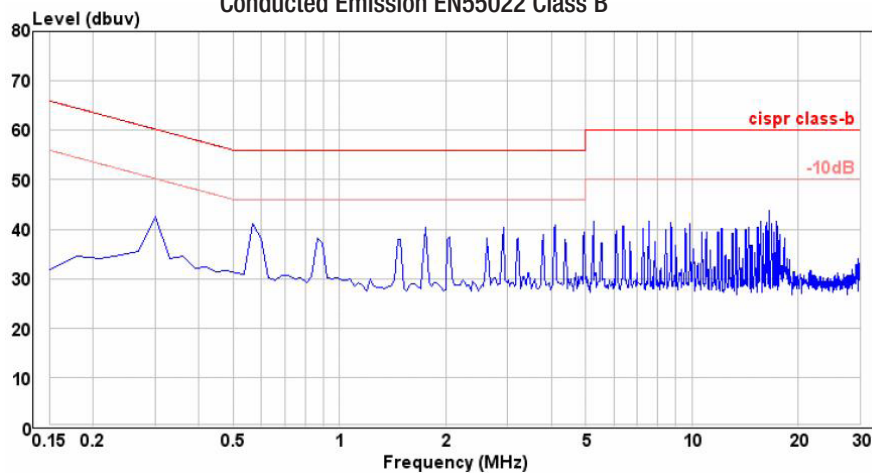



Specifications (measured @  $t_a = 25^\circ\text{C}$ , nominal input voltage, full load and after warm-up)

### DIMENSIONS and PHYSICAL CHARACTERISTICS

| Parameter                   | Type                                | Value                                          |
|-----------------------------|-------------------------------------|------------------------------------------------|
| Material                    | Case                                | 24Vin, 48Vin<br>110Vin<br>Metal<br>Plastic     |
|                             | Baseplate                           | 24Vin, 48Vin<br>110Vin<br>FR4 PCB<br>Aluminium |
|                             | Potting                             | Silicone (UL94 V-0)                            |
| Packaging Dimension (LxWxH) | without Heat-sink<br>with Heat-sink | 61.0 x 57.9 x 12.7mm<br>61.0 x 57.9 x 24.13mm  |
| Packaging Weight            | without Heat-sink<br>with Heat-sink | 105g<br>157g                                   |

### Dimension Drawing (mm)


#### 24Vout, 48Vout

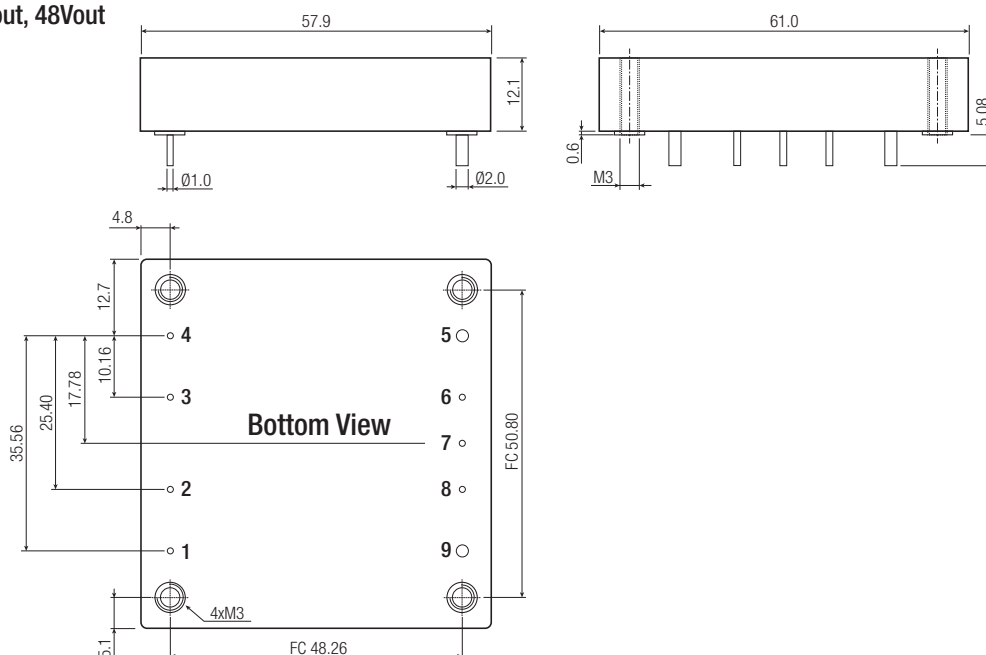

### Pin Connections

| Pin # | Single |
|-------|--------|
| 1     | +Vin   |
| 2     | CTRL   |
| 3     | Case   |
| 4     | -Vin   |
| 5     | -Vout  |
| 6     | -Sense |
| 7     | Trim   |
| 8     | +Sense |
| 9     | +Vout  |

#### 110Vout

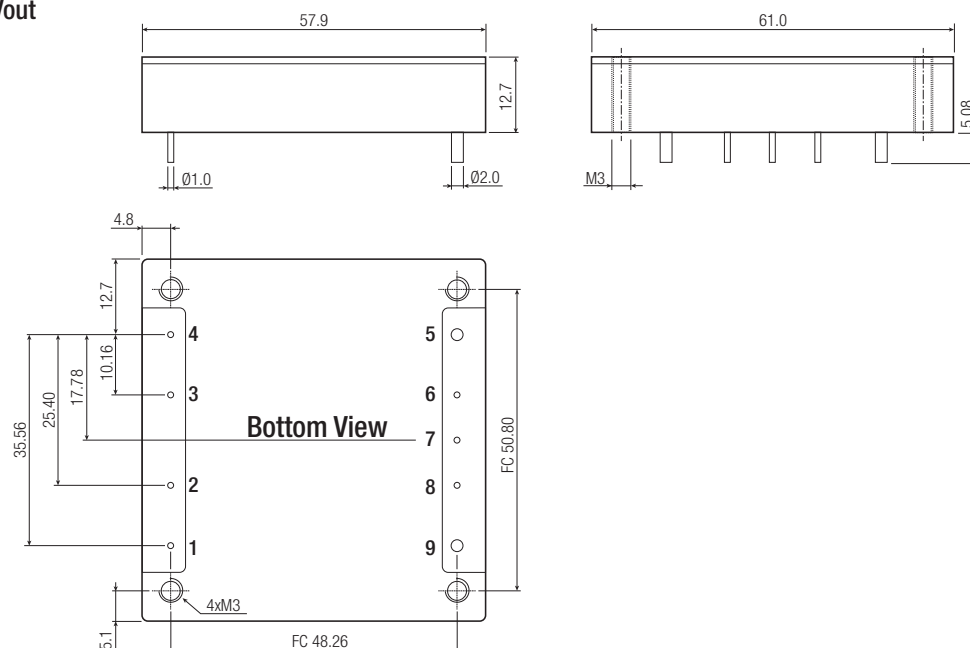


FC= Fixing Centers for Heat-sink  
Pin Pitch Tolerance  $\pm 0.25\text{mm}$   
Pin Dimension Tolerance  $\pm 0.1\text{mm}$   
XX.X  $\pm 0.5\text{mm}$   
XX.XX  $\pm 0.25\text{mm}$

continued on next page


Specifications (measured @  $t_a = 25^\circ\text{C}$ , nominal input voltage, full load and after warm-up)

110Vin with Heat-sink

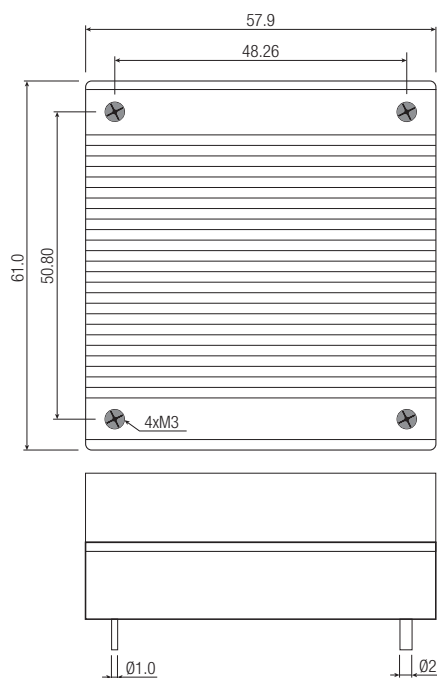

**Notes:**

Note7: Max. tightening torque for Heat-sink: 0.34Nm

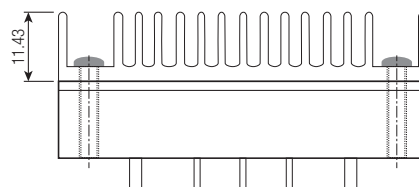

### PACKAGING INFORMATION

| Parameter                 | Type |                   | Value                 |
|---------------------------|------|-------------------|-----------------------|
| Packaging Dimension       | Tray | without Heat-sink | 157.0 x 88.0 x 12.8mm |
|                           |      | with Heat-sink    | 157.0 x 88.0 x 24.8mm |
| Packaging Quantity        |      |                   | 2pcs.                 |
| Storage Temperature Range |      |                   | -55°C to +125°C       |
| Storage Humidity          |      |                   | 5% - 95% RH           |

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## RECOM:

[RP75H-2405SRW/N](#) [RP75H-2424SRW/N](#) [RP75H-2412SRW/N-HC](#) [RP75H-2405SRW/P](#) [RP75H-2412SRW/N](#)  
[RP75H-2448SRW/N](#) [RP75H-11024SRW/P](#) [RP75H-11048SRW/P](#) [RP75H-11012SRW/N-HC](#) [RP75H-11012SRW/N](#)  
[RP75H-11005SRW/P-HC](#) [RP75H-11012SRW/P-HC](#) [RP75H-4815SRW/P](#) [RP75H-2424SRW/P](#) [RP75H-4824SRW/P-](#)  
[HC](#) [RP75H-11015SRW/P-HC](#) [RP75H-2448SRW/N-HC](#) [RP75H-11024SRW/N-HC](#) [RP75H-4824SRW/P](#) [RP75H-](#)  
[4815SRW/P-HC](#) [RP75H-4848SRW/N](#) [RP75H-11012SRW/P](#) [RP75H-11005SRW/N-HC](#) [RP75H-4812SRW/N-HC](#)  
[RP75H-4805SRW/N-HC](#) [RP75H-4824SRW/N-HC](#) [RP75H-11048SRW/N-HC](#) [RP75H-11005SRW/P](#) [RP75H-](#)  
[11015SRW/N-HC](#) [RP75H-4848SRW/P-HC](#) [RP75H-4815SRW/N](#) [RP75H-2412SRW/P-HC](#) [RP75H-2405SRW/N-HC](#)  
[RP75H-4824SRW/N](#) [RP75H-11024SRW/N](#) [RP75H-11048SRW/P-HC](#) [RP75H-2415SRW/P](#) [RP75H-4812SRW/P](#)  
[RP75H-2415SRW/N-HC](#) [RP75H-4805SRW/N](#) [RP75H-4812SRW/N](#) [RP75H-4812SRW/P-HC](#) [RP75H-2405SRW/P-HC](#)  
[RP75H-2415SRW/P-HC](#) [RP75H-11048SRW/N](#) [RP75H-2448SRW/P-HC](#) [RP75H-4805SRW/P](#) [RP75H-11005SRW/N](#)  
[RP75H-4848SRW/N-HC](#) [RP75H-11024SRW/P-HC](#) [RP75H-2424SRW/P-HC](#) [RP75H-4848SRW/P](#) [RP75H-](#)  
[4805SRW/P-HC](#) [RP75H-11015SRW/N](#) [RP75H-11015SRW/P](#) [RP75H-2448SRW/P](#) [RP75H-2424SRW/N-HC](#) [RP75H-](#)  
[2412SRW/P](#) [RP75H-2415SRW/N](#) [RP75H-4815SRW/N-HC](#)