


SULLINS 卡边连接器

双电平 - 高温 150°C

技术规格: • 工作温度: -65°C ~ 150°C • 绝缘体: PPS/铜

镀: • 触点: 局部镀金 • 触点镀层: 底层镀镍 • UL 文件编号: E64287, 通过 UL94V-0 认证 • 终端镀层: 锡



位置/ 触点	尺寸 - 英寸					Digi-Key 零件编号	单价			Sullins 零件编号
	A	B	C	D	E		1	10	100	
	直角, 0.100" 触点中心									
10	0.810	1.125	1.385	.250	1.195	S7155-ND	23.63	18.75	13.13	ACB10DKBS
12	0.910	1.225	1.485	.250	1.195	S7156-ND	28.35	22.50	15.75	ACB12DKBS
24	1.510	1.825	2.085	.250	1.195	S7157-ND	56.70	45.00	31.50	ACB24DKBS
30	1.810	2.125	2.385	.250	1.195	S7158-ND	70.88	56.25	39.38	ACB30DKBS
36	2.110	2.425	2.685	.250	1.195	S7160-ND	85.05	67.50	47.25	ACB36DKBS
40	2.310	2.625	2.885	.250	1.195	S7161-ND	94.50	75.00	52.50	ACB40DKBS
44	2.510	2.825	3.085	.250	1.195	S7162-ND	103.95	82.50	57.75	ACB44DKBS
50	2.810	3.125	3.385	.250	1.195	S7163-ND	118.13	93.75	65.63	ACB50DKBS
56	3.110	3.425	3.685	.250	1.195	S7164-ND	132.30	105.00	73.50	ACB56DKBS
62	3.410	3.725	3.985	.250	1.195	S7166-ND	146.48	116.25	81.38	ACB62DKBS
72	3.910	4.225	4.485	.250	1.195	S7167-ND	170.10	135.00	94.50	ACB72DKBS
80	4.310	4.625	4.885	.250	1.195	S7168-ND	189.00	150.00	105.00	ACB80DKBS
86	4.610	4.925	5.185	.250	1.195	S7169-ND	203.18	161.25	112.88	ACB86DKBS
90	4.810	5.125	5.385	.250	1.195	S7170-ND	212.63	168.75	118.13	ACB90DKBS
90	4.810	5.125	5.385	.250	1.195	S7171-ND	212.63	168.75	118.13	ACB90DKBS-S1075

压接式




技术规格:

• 工作温度: -65°C ~ 125°C

• 绝缘体: PBT/磷青铜

• 触点: 局部镀金

• 触点镀层: 底层镀镍
• UL 文件编号: E64287, 通过 UL94V-0 认证
• 终端镀层: 锡





位置/ 触点	尺寸 - 英寸					Digi-Key 零件编号	单价			Sullins 零件编号
	A	B	C	D	E		1	10	100	
小尺寸, 0.025" 方接柱, 0.200" 排间距										
5/10	0.756	0.600	0.400	.370	.550	S7264-ND	—	2.68	—	ECC05DJBN
6/12	0.856	0.700	0.500	.370	.550	S7265-ND	—	3.33	—	ECC06DJBN
15/30	1.756	1.600	1.400	.370	.550	S7268-ND	6.90	5.48	3.84	ECC15DJBN
18/36	2.056	1.900	1.700	.370	.550	S7269-ND	—	6.08	—	ECC18DJBN
20/40	2.256	2.100	1.900	.370	.550	S7270-ND	—	5.16	—	ECC20DJBN
22/44	2.456	2.300	2.100	.370	.550	S7271-ND	8.63	6.85	4.80	ECC22DJBN
25/50	2.756	2.600	2.400	.370	.550	S7272-ND	9.39	7.45	5.22	ECC25DJBN
28/56	3.056	2.900	2.700	.370	.550	S7273-ND	10.14	8.05	5.64	ECC28DJBN
30/60	3.256	3.100	2.900	.370	.550	S7274-ND	—	5.04	—	ECC30DJBN
35/70	3.756	3.600	3.400	.370	.550	S7275-ND	11.84	9.40	6.58	ECC35DJBN
36/72	3.856	3.700	3.500	.370	.550	S7276-ND	12.10	9.60	6.72	ECC36DJBN
40/80	4.256	4.100	3.900	.370	.550	S7277-ND	13.07	10.38	7.27	ECC40DJBN
43/86	4.556	4.400	4.200	.370	.550	S7278-ND	13.83	10.98	7.69	ECC43DJBN
50/100	5.256	5.100	4.900	.370	.550	S7279-ND	15.88	12.60	8.82	ECC50DJBN
60/120	6.256	6.100	5.900	.370	.550	S7280-ND	18.36	14.58	10.21	ECC60DJBN
大尺寸, 0.025" 方接柱, 0.200" 排间距										
5/10	0.756	0.600	0.400	.370	.610	S7247-ND	3.97	3.15	2.21	ECC05DJWN
6/12	0.856	0.700	0.500	.370	.610	S7248-ND	4.44	3.53	2.47	ECC06DJWN
10/20	1.256	1.100	0.900	.370	.610	S7249-ND	—	3.58	—	ECC10DJWN
15/30	1.756	1.600	1.400	.370	.610	S7251-ND	6.90	5.48	3.84	ECC15DJWN
18/36	2.056	1.900	1.700	.370	.610	S7252-ND	7.65	6.08	4.26	ECC18DJWN
20/40	2.256	2.100	1.900	.370	.610	S7253-ND	8.13	6.45	4.52	ECC20DJWN
22/44	2.456	2.300	2.100	.370	.610	S7254-ND	8.63	6.85	4.80	ECC22DJWN
25/50	2.756	2.600	2.400	.370	.610	S7255-ND	9.39	7.45	5.22	ECC25DJWN
28/56	3.056	2.900	2.700	.370	.610	S7256-ND	10.14	8.05	5.64	ECC28DJWN
30/60	3.256	3.100	2.900	.370	.610	S7257-ND	—	5.04	—	ECC30DJWN
35/70	3.756	3.600	3.400	.370	.610	S7258-ND	—	5.64	—	ECC35DJWN
36/72	3.856	3.700	3.500	.370	.610	S7259-ND	12.10	9.60	6.72	ECC36DJWN
40/80	4.256	4.100	3.900	.370	.610	S7260-ND	13.07	10.38	7.27	ECC40DJWN
43/86	4.556	4.400	4.200	.370	.610	S7261-ND	13.83	10.98	7.69	ECC43DJWN
50/100	5.256	5.100	4.900	.370	.610	S7262-ND	15.88	12.60	8.82	ECC50DJWN
60/120	6.256	6.100	5.900	.370	.610	S7263-ND	18.36	14.58	10.21	ECC60DJWN

直形

材料:

• 绝缘体: 玻璃填充热塑性聚酰胺 PBT (标准), 通过 UL 94V-0 认证。对于 1mm 和 0.050" 间距零件为 "PPS", 对于其它零件为 "PBT" • 触点: 磷青铜 (标准) • 触点镀层: 镍层上镀金 • UL 文件编号: E64287 • 终端镀层: 锡

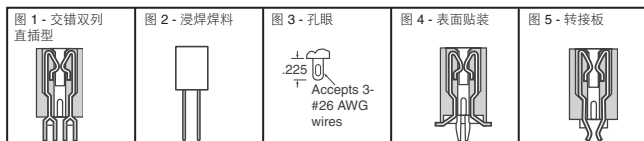

位置/ 触点	尺寸 - 英寸					Digi-Key 零件编号	单价			Sullins 零件编号
	A	B	C	D	E		1	10	100	
大尺寸										
图1 - 外围元器件互连 (PCI) 0.050" 触点中心										
42/49	4.890	5.176	5.490	.370	.610	S0919-578-ND	16.38	13.00	9.10	RZB91DCHN-S578
图1 - 1mm 触点中心										
15/30	0.901	1.187	1.501	.370	.610	S3151-ND	15.97	12.68	7.61	RZE15DHFN

位置/ 触点	尺寸 - 英寸					Digi-Key 零件编号	单价			Sullins 零件编号
	A	B	C	D	E		1	10	100	
20/40	1.098	1.384	1.698	.370	.610	S3152-ND	17.14	13.60	8.16	RZE20DHFN
25/50	1.295	1.581	1.895	.370	.610	S3153-ND	18.43	14.63	8.16	RZE25DHFN
30/60	1.492	1.778	2.092	.370	.610	S3154-ND	19.72	15.65	9.39	RZE30DHFN
35/70	1.689	1.975	2.289	.370	.610	S3155-ND	21.01	16.68	10.01	RZE35DHFN
45/90	2.082	2.368	2.682	.370	.610	S3157-ND	23.50	18.65	11.19	RZE45DHFN
50/100	2.279	2.565	2.879	.370	.610	S3158-ND	24.79	19.68	11.81	RZE50DHFN

图1 - 0.050" 高温

73/219	—	—	4.250	.465	.613	S3282-ND	20.85	16.55	9.93	RPWB073GKHR-T621
80/240	—	—	4.600	.465	.613	S3283-ND	26.05	20.68	12.41	RPWB080GKHR-T621
90/270	—	—	5.100	.465	.613	S3284-ND	36.92	29.30	17.58	RPWB090GKHR-T621
100/300	—	—	5.600	.465	.613	S3285-ND	49.23	39.08	23.45	RPWB110GKHR-T621

图1 - 0.050" 触点中心

6/12	0.540	0.826	1.140	.370	.610	S3364-ND	8.32	6.60	4.62	RBB06DHHN
10/20	0.740	1.026	1.340	.370	.610	S3371-ND	9.36	7.43	4.46	RBB10DHHN
13/26	0.890	1.176	1.490	.370	.610	S3120-ND	11.25	8.93	5.36	RZB13DHHN
13/26	0.890	1.176	1.490	.370	.610	S3373-ND	10.05	7.98	4.79	RBB13DHHN
15/30	0.990	1.276	1.590	.370	.610	S3121-ND	11.53	9.15	5.49	RZB15DHHN
15/30	0.990	1.276	1.590	.370	.610	S3375-ND	10.62	8.43	5.06	RBB15DHHN
20/40	1.240	1.526	1.840	.370	.610	S3378-ND	11.88	9.43	5.66	RBB20DHHN
22/44	1.340	1.626	1.940	.370	.610	S3123-ND	12.35	9.80	5.88	RZB22DHHN
25/50	1.490	1.776	2.090	.370	.610	S3380-ND	13.14	10.43	6.26	RBB25DHHN
30/60	1.740	2.026	2.340	.370	.610	S3383-ND	14.40	11.43	6.86	RBB30DHHN
34/68	1.940	2.226	2.540	.370	.610	S3126-ND	13.80	10.95	6.57	RZB34DHHN
34/68	1.940	2.226	2.540	.370	.610	S3386-ND	15.44	12.25	7.35	RBB34DHHN
35/70	1.990	2.276	2.590	.370	.610	S3127-ND	13.89	11.03	6.62	RZB35DHHN
35/70	1.990	2.276	2.590	.370	.610	S3388-ND	15.66	12.43	7.46	RBB35DHHN
40/80	2.240	2.526	2.840	.370	.610	S3389-ND	16.92	13.43	8.06	RBB40DHHN
45/90	2.490	2.776	3.090	.370	.610	S3129-ND	15.03	11.93	7.16	RZB45DHHN
45/90	2.490	2.776	3.090	.370	.610	S3391-ND	18.21	14.45	8.67	RBB45DHHN
50/100	2.740	3.026	3.340	.370	.610	S3130-ND	15.66	12.43	7.46	RZB50DHHN
60/120	3.240	3.526	3.840	.370	.610	S3394-ND	21.99	17.45	10.47	RBB60DHHN
64/128	3.440	3.726	4.040	.370	.610	S3397-ND	23.03	18.28	10.97	RBB64DHHN
75/150	3.990	4.276	4.590	.370	.610	S3133-ND	18.62	14.78	8.87	RZB75DHHN
75/150	3.990	4.276	4.590	.370	.610	S3399-ND	25.77	20.45	12.27	RBB75DHHN
80/160	4.240	4.526	4.840	.370	.610	S3400-ND	27.12	21.53	12.92	RBB80DHHN
85/170	4.490	4.776	5.090	.370	.610	S3135-ND	19.85	15.75	9.45	RZB85DHHN
95/190	4.990	5.276	5.590	.370	.610	S3136-ND	20.98	16.65	9.99	RZB95DHHN
100/200	5.240	5.526	5.840	.370	.610	S3137-ND	21.58	17.13	10.28	RZB100DHHN
100/200	5.240	5.526	5.840	.370	.610	S3366-ND	32.16	25.53	15.32	RBB100DHHN
105/210	5.490	5.776	6.090	.370	.610	S3138-ND	22.18	17.60	10.56	RZB105DHHN
108/216	5.640	5.926	6.240	.370	.610	S3139-ND	22.49	17.85	10.71	RZB108DHHN
110/220	5.740	6.026	6.340	.370	.610	S3140-ND	22.81	18.10	10.86	RZB110DHHN
120/240	6.240	6.526	6.840	.370	.610	S3141-ND	23.03	19.08	11.45	RZB120DHHN