

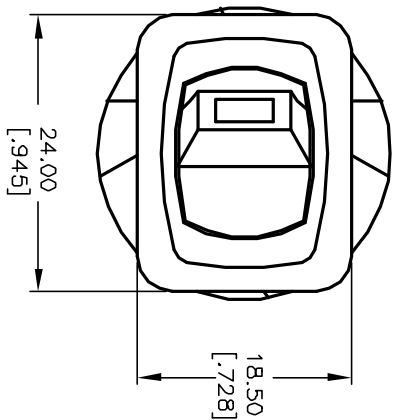
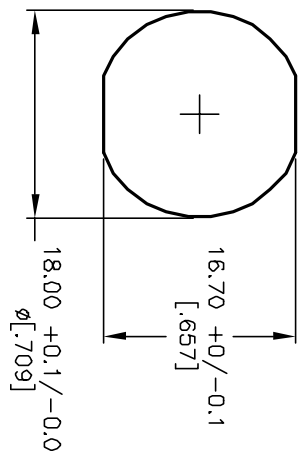



SECTION A-A

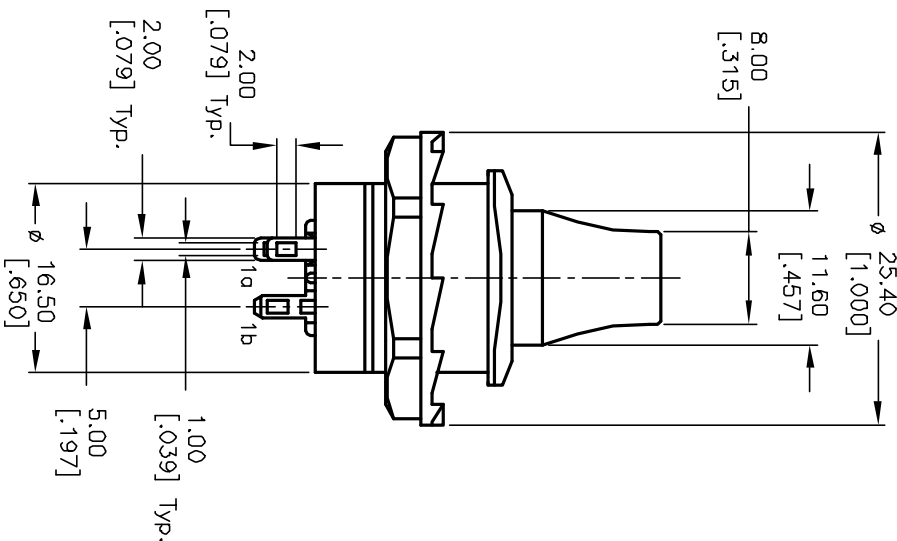

RECOMMEND PANEL MOUNTING

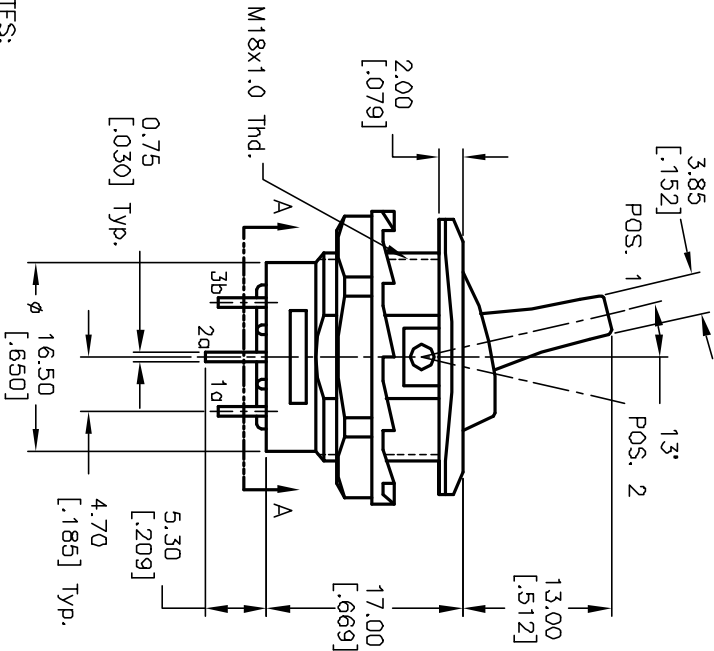

CIRCUIT: 4P. SPST
CONTACT CONFIGURATION



SWITCH FUNCTION	
POS. 1	POS. 2
ON	OFF
2a-1a	OPEN

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: 0.0=±0.4
0.00=±0.25
3. TERM. NOS. FOR REF. ONLY
4. CONTACT RESISTANCE: 50m ohm max.
5. INSULATION RESISTANCE: DC 500V, 100M ohm min.
5. DIELECTRIC STRENGTH: AC 1500V 1 minute

TITLE			
RR34054L-RED			
E-SWITCH®			
REV.	ECN No.	DESCRIPTION	DATE
A	10519	RELEASED FOR PRODUCTION	
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED			
SCALE		DATE	DR
1.5:1		2/8/00	MM
		DWG	F030007
		REV	A