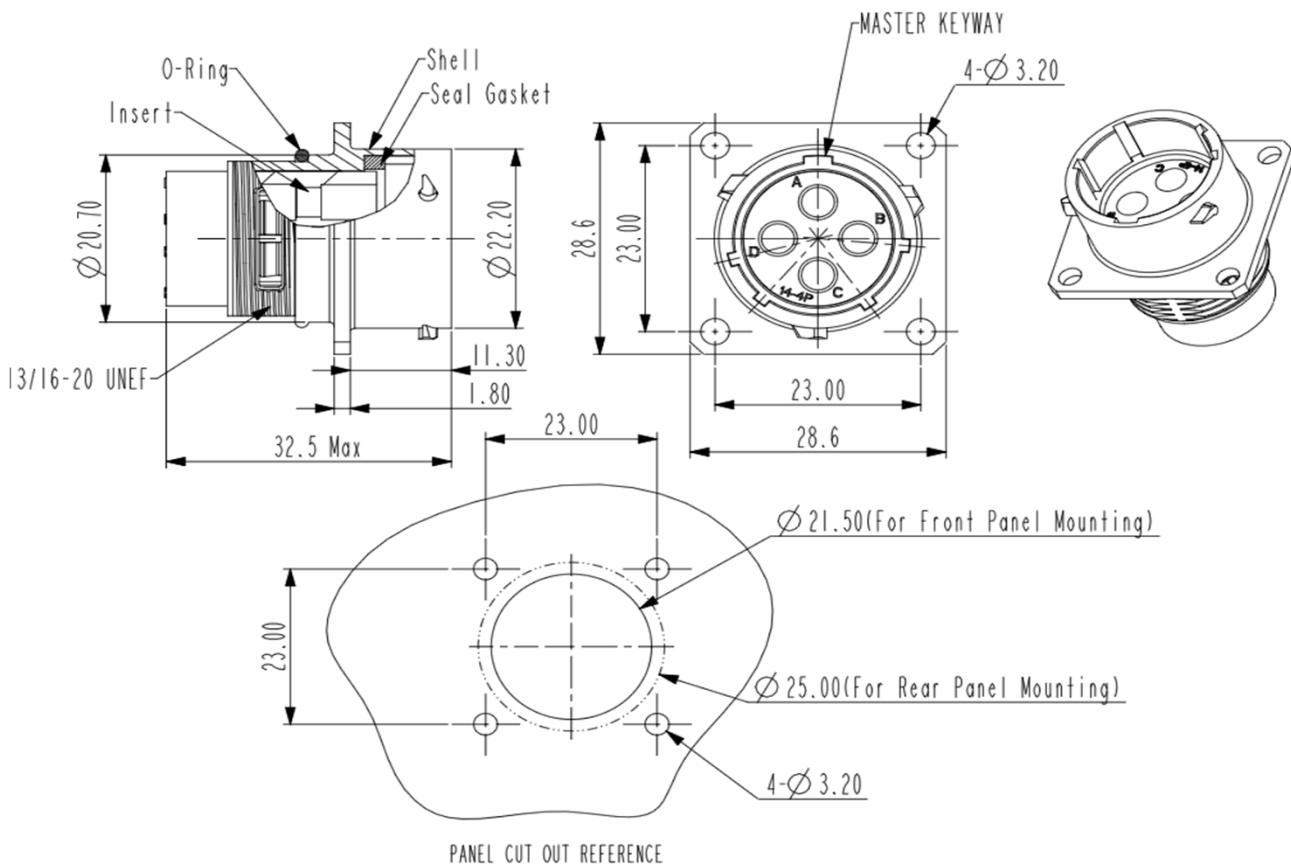


CONFIGURATION		PART NUMBER
Male Receptacle, 4 Pin, 2.5mm, Shell 14		RT00144PNH
DIMENSIONS		
 <p>The technical drawing includes three views of the connector: a side view, a front view, and a panel cut out reference view. The side view shows the connector's profile with dimensions: overall height 20.70, shell height 22.20, insert height 11.30, and a maximum length of 32.5. It also indicates a 1.80 offset and a 13/16-20 UNEF thread. The front view shows a circular connector with a 23.00 diameter, 28.6 outer diameter, and 4-3.20 mounting holes. It features a master keyway and four pins labeled A, B, C, and D. The panel cut out reference view shows a 23.00 diameter cut out with a 21.50 diameter for front panel mounting and a 25.00 diameter for rear panel mounting, with 4-3.20 mounting holes.</p>		
TECHNICAL DATA		
TEMPERATURE RANGE:	-40°C to + 105°C	
PROTECTION:	IP67 in mated condition and in combination with sealed backshell	
VOLTAGE RATING:	350V	
HOUSING BODY:	Zinc Alloy, Nickel Plated	
COUPLING NUT:		
INSERT:	Glass-filled Thermoplastic UL94-V0	
SEAL:	NBR	
CURRENT:	23A	
CONTACT SIZE:	2.5mm	
APPROVALS:	UL ECBT2	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[RT00144PNH](#)