



RX CONNECTOR

Disconnectable Insulation displacement connectors for 1.27mm pitch ribbon cables

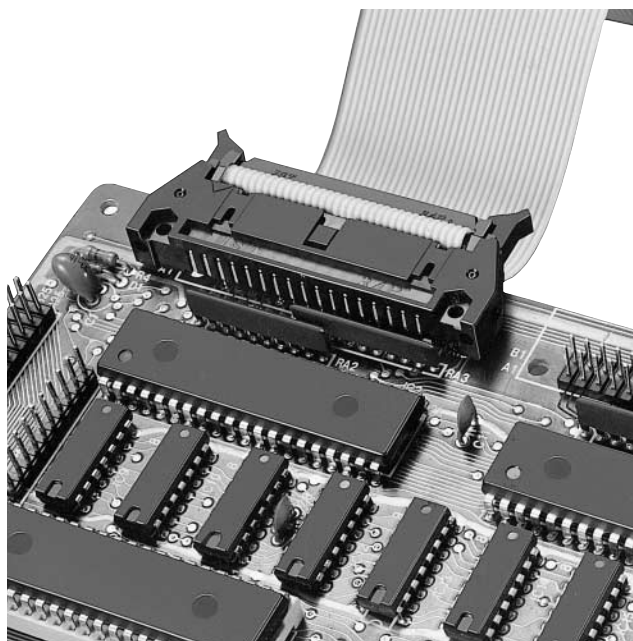

Contemporary needs require that electronic equipment be high in density, modular in construction and multi-functional. In addition, the costs of such connection systems must be reduced. To meet these needs, particularly in the video and audio fields, we offer JST's highly reliable and cost-efficient RX connectors. These connectors reflect displacement connection technology as well as its advanced production techniques.

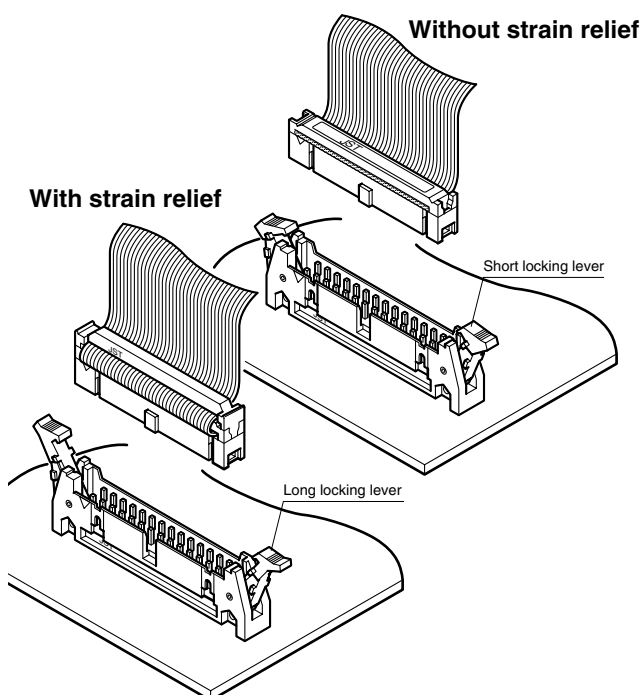

Features

• **Conforms to MIL Standards**

JST's RX connectors conform to MIL standards (MIL-C-83503) and are compatible with its RA connectors.

• **Secure locking mechanism**

The locking levers are engaged by inserting the receptacle into the header. This ensures a firm connection that's highly resistant to impact and vibration. To save space, JST has also made available short locking levers which provides a firm connection even when the receptacle has no strain relief.

• **Cost-efficient**

To reduce costs, only the mating sections of the receptacle contacts and header posts are gold-plated. JST's wealth of mass-production technology allows it to produce connectors that are extremely reliable and cost-efficient.

• **Post suited for high-density patterns**

The mating section of the header post is 0.64mm square. The printed circuit board solder section of the post is 0.60mm in diameter. This small size greatly facilitates high-density design of printed circuit boards.

* Refer to "General Instruction and Notice when using Terminals and Connectors" at the end of this catalog.

* Contact JST for details.


* Compliant with RoHS.

Standards

Recognized E60389

Certified LR20812

Receptacle

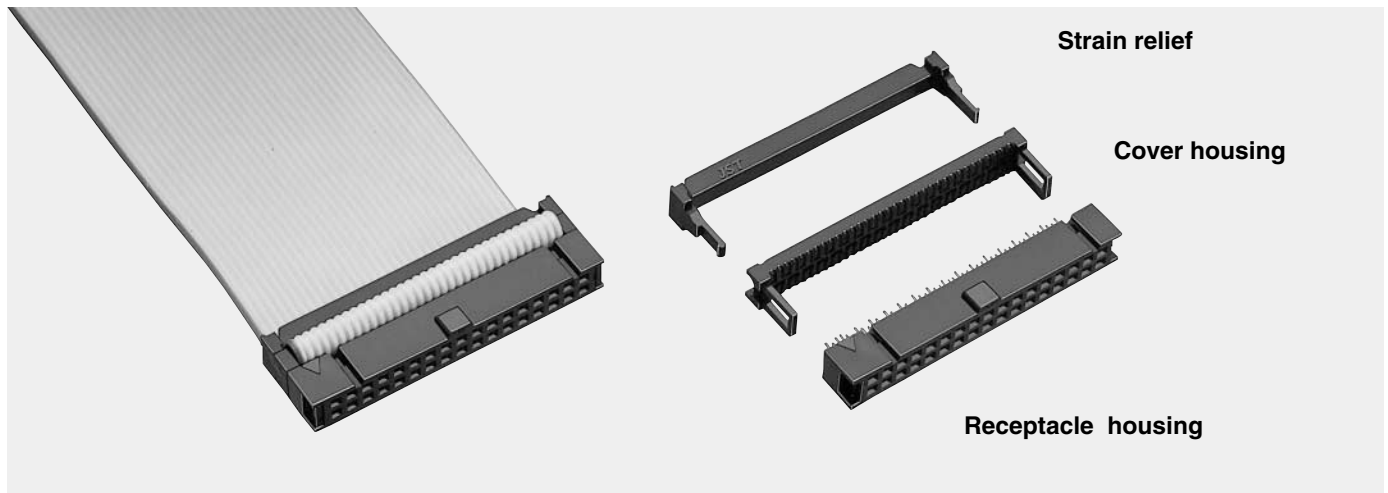

Specifications

Characteristics

Current rating	1.0 A AC, DC
Voltage rating	300 V AC, DC
Temperature range	(including temperature rise in applying electrical current) -55°C to +125°C (gold-plated) -55°C to +85°C (tin-plated)
Contact resistance	Initial value: 20 mΩ max. After environmental testis: 30 mΩ max.
Insulation resistance	5,000 MΩ min.
Withstanding voltage	500 VAC/ 5 seconds
Applicable wire	AWG #28, 1.27 mm pitch ribbon cables


Materials

Contact	Phosphor bronze • Nickel-undercoated Mating part: gold-plated Insulation displacement part: tin-plated (reflow treatment) • Copper-undercoated, tin-plated (reflow treatment)
Receptacle housing	Glass-filled PBT, UL94V-0, black
Cover housing	Glass-filled PA 66, UL94V-0, black
Strain relief	Glass-filled PA 66, UL94V-0, black

*Contact JST details.

Applicable cables

Ribbon cables conforming to the following specifications can be used with RX connector receptacles. Contact JST for details.

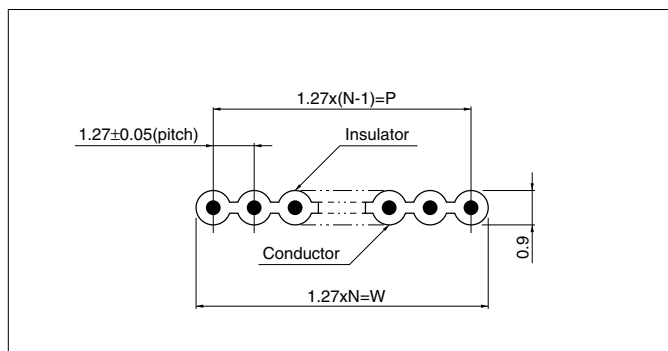

Note: N --- Number of circuits

Conductor	AWG #28 stranded wire Construction: 7/0.127 mm dia. Material: Tin-plated annealed copper wire
	AWG #28 solid wire Construction: 0.32 mm dia. Material: Tin-plated annealed copper wire
Insulator	Soft vinyl chloride


Number of conductors (n)	Dimensional tolerance (mm)	
	P	W
10 to 14	±0.18	±0.3
16 to 26	±0.28	±0.3
34 to 60	±0.38	±0.3

Shrouded header

Top entry type
with long locking lever



Side entry type
with short locking lever

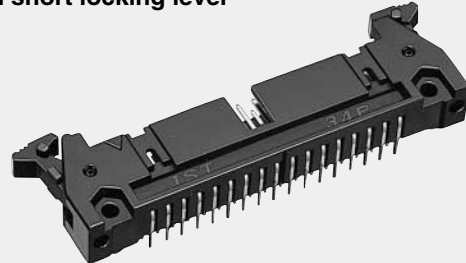

Specifications


Characteristics

Current rating	1.0 A AC, DC
Voltage rating	300 V AC, DC
Temperature range	(including temperature rise in applying electrical current) -55°C to +125°C (gold-plated) -55°C to +85°C (tin-plated)
Insulation resistance	5,000 MΩ min.
Withstanding voltage	500 VAC/5 seconds
Applicable PC board thickness	1.6 mm

Materials

Contact	Brass • Nickel-undercoated Mating part; gold-plated Solder tail; tin-plated (reflow treatment) • Copper-undercoated, tin-plated (reflow treatment)
Housing	Glass-filled PBT, UL94V-0, black
Locking lever	Glass-filled PBT, UL94V-0, black

Note: Contact JST for details.

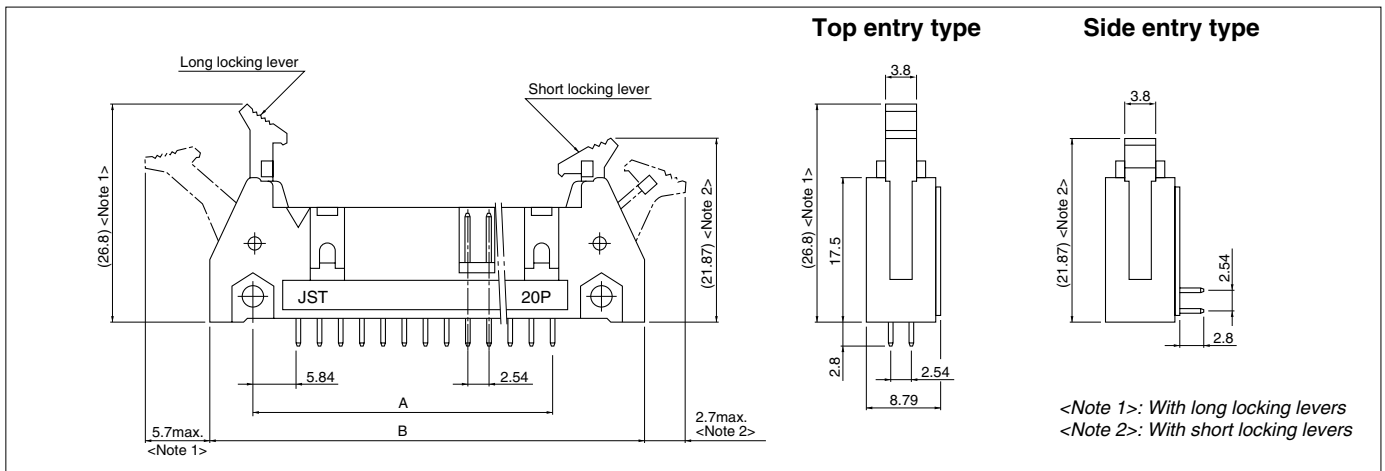

Cir- cuits	Type	Model No.				Guide grooves	Dimensions (mm)		Q'ty / box
		Gold-plated header		Tin-plated-header			A	B	
		Top entry type	Side entry type	Top entry type	Side entry type				
20	Long	RX-H201TD	RX-H201SD	RX-H201TD-1190	RX-H201SD-1190	1	22.86	44.66	50
	Short	RX-H201TD-2110	RX-H201SD-2110	RX-H201TD-2190	RX-H201SD-2190	1			
34	Long	RX-H341TD	RX-H341SD	RX-H341TD-1190	RX-H341SD-1190	1	40.64	62.44	25
	Short	RX-H341TD-2110	RX-H341SD-2110	RX-H341TD-2190	RX-H341SD-2190	1			
40	Long	RX-H401TD	RX-H401SD	RX-H401TD-1190	RX-H401SD-1190	1	48.26	70.06	25
	Short	RX-H401TD-2110	RX-H401SD-2110	RX-H401TD-2190	RX-H401SD-2190	1			
50	Long	RX-H501TD	RX-H501SD	RX-H501TD-1190	RX-H501SD-1190	1	60.96	82.76	25
	Short	RX-H501TD-2110	RX-H501SD-2110	RX-H501TD-2190	RX-H501SD-2190	1			
60	Long	RX-H601TD	RX-H601SD	RX-H601TD-1190	RX-H601SD-1190	1	73.66	95.46	25
	Short	RX-H601TD-2110	RX-H601SD-2110	RX-H601TD-2190	RX-H601SD-2190	1			

RoHS compliance This product displays (LF)(SN) on a label.

Note: It may be that products in the above table are discontinued production without notice.

Please confirm the latest information when adopting and ordering the product.

RX CONNECTOR


Model number identification

- RX - H 50 1 TD - 1 1 10**
- Series name
 - Product name: Header
 - Number of circuits: 20, 34, 40, 50, 60
 - Number of guide grooves: 1 ... 20 to 60 circuits
 - Mounting method: TD ... Top entry, SD ... Side entry
 - Type of locking lever: 0 ... Without locking cover
1 ... Long locking lever, 2 ... Short locking lever
 - Material and shape of post: 1 ... Brass, 0.60mm diameter pin at soldering section
 - Surface finish: 10... Gold flash, 12... 0.2micron gold-plated, 13... 0.4micron gold-plated
14... 0.76micron gold-plated, 90... Tin-plated (reflow treatment)


Note:
The standard gold-plated type is identified by the suffix number [-1110] but this suffix number is usually omitted. Other types must be identified by the full code number.

PC board layout (viewed from component side)

Top entry type

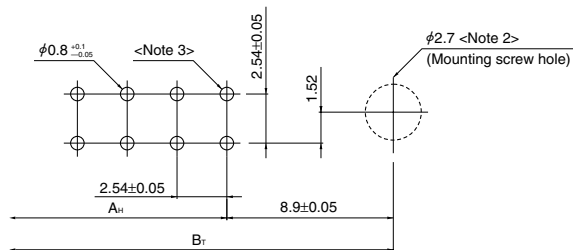

Side entry type

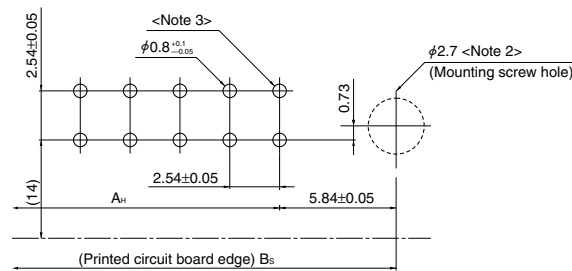

Circuits	Dimensions (mm)		
	A_H	B_T	B_S
20	22.86	40.66	34.54
34	40.64	58.44	52.32
40	48.26	66.06	59.94
50	60.96	78.76	72.64
60	73.66	91.46	85.34

- Note:*
1. Tolerances are non-cumulative: $\pm 0.05\text{mm}$ for all centers. Hole dimensions differ according to the kind of PC board and piercing method. The dimensions above should serve as a guideline. Contact JST for details.
 2. The mounting screw holes are required for mounting headers on printed circuit boards but are not required for standard header.
 3. This is normally the No. 1 circuit position.