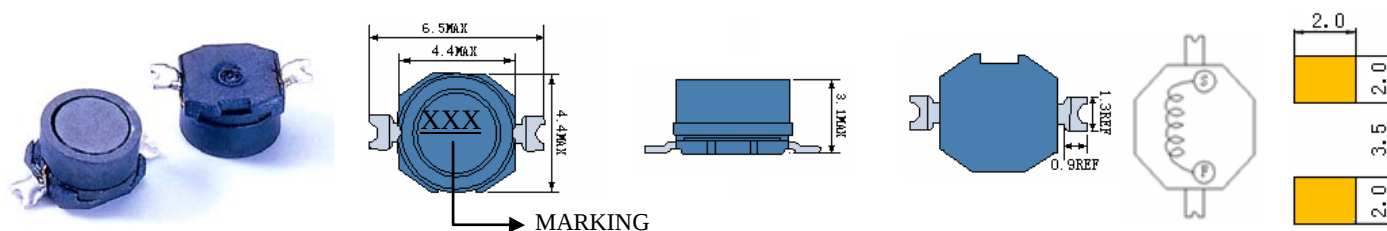


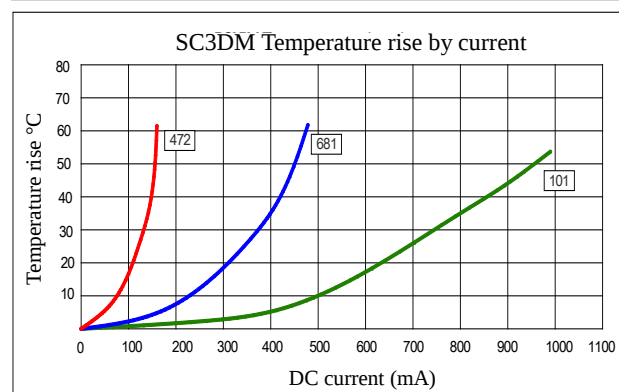
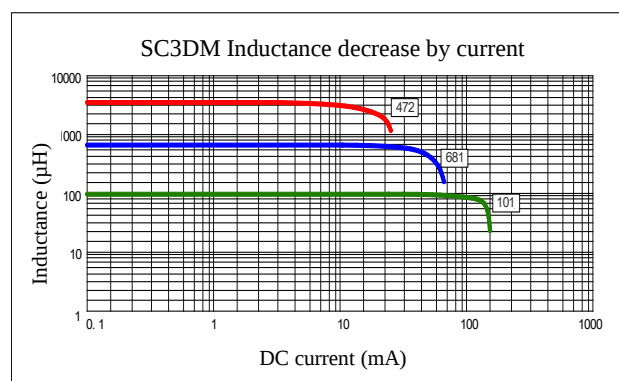
SMD POWER INDUCTORS



- Features

1. Magnetically shielded construction – Low EMI
2. Excellent Power Density
3. Engineered to Provide High Efficiency

ELECTRICAL CHARACTERISTICS

[illegible]

- (1). Inductance tolerance $\pm 30\%$ tested at 0.25V, 0ADC and 25°C.
- (2). DCR measured at 25°C.
- (3). The DC current at which the inductance decreases by 10% from its initial value.
- (4). The DC current that results in a 40°C temperature rise from 25°C ambient.

[Click here for QUANTITY PER REEL & PACKING INFORMATION](#)

Custom versions available upon request.

Signal Transformer
www.signaltransformer.com

©2011 Signal Transformer –Specification subject to change without notice. 07.11

500 Bayview Avenue, Inwood, NY 11096
Toll Free 866-239-5777 • Tel 516-239-5777 • Fax 516-239-7208
Sales@signaltransformer.com • techhelp@signaltransformer.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Bel:

[SC3DM-221](#) [SC3DM-471](#) [SC3DM-152](#) [SC3DM-151](#) [SC3DM-681](#) [SC3DM-472](#) [SC3DM-331](#) [SC3DM-222](#) [SC3DM-332](#) [SC3DM-101](#) [SC3DM-102](#)