

January 8, 1998

TEL:805-498-2111 FAX:805-498-3804 WEB:<http://www.semtech.com>

HIGH VOLTAGE, HIGH DENSITY, STANDARD RECOVERY LEADED SILICON RECTIFIER ASSEMBLY

QUICK REFERENCE DATA


- Low reverse leakage current
- Low forward voltage drop
- High thermal shock resistance
- Corona free construction
- Low distributed capacitance

- $V_R = 2500V - 15000V$
- $I_F = 2.0A$
- $I_R = 1.0 \mu A$
- $I_{FSM} = 80A$

ABSOLUTE MAXIMUM RATINGS

Device Type	Working Reverse Voltage V_{RWM}	Average Rectified Current $I_F(AV)$				1 Cycle Surge Current I_{FSM} $t_p = 8.3mS$ @ T_j MAX	I^2t $t_p = 8.3mS$ @ T_j MAX	Repetitive Surge Current @ 25°C	Case Length dim. C Max
		@ 55 °C	@ 100 °C	Forced air 600CFM, 25°C	in still oil @ 55 °C				
		Amps	Amps	Amps	Amps				
SCHS2500	2500	↑	↑	↑	↑	↑	↑	↑	1.53
SCHS5000	5000	↑	↑	↑	↑	↑	↑	↑	2.53
SCHS7500	7500	2.0	1.2	2.0	4.0	80	26	31	3.53
SCHS10000	10000	↓	↓	↓	↓	↓	↓	↓	4.53
SCHS12500	12500	↓	↓	↓	↓	↓	↓	↓	5.53
SCHS15000	15000	↓	↓	↓	↓	↓	↓	↓	6.53

MECHANICAL

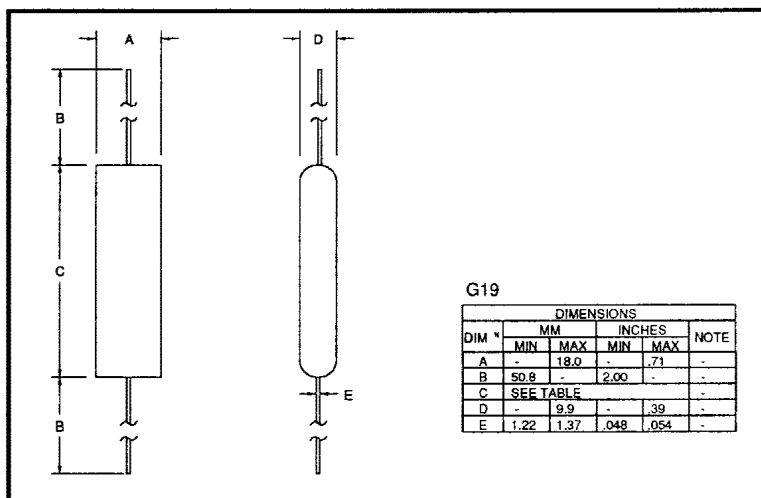

January 8, 1998

ELECTRICAL CHARACTERISTICS

Device Type	Maximum Reverse Leakage Current I_R @ V_{RWM}		Maximum Forward Voltages V_F @ 3.0A @ 25°C	Maximum Reverse Recovery Time ⁽¹⁾ @ 25°C
	@ 25 °C	@ 100 °C		
	μA	μA	Volts	μS
SCHS2500	1.00	10.0	3.45	2.5
SCHS5000			5.75	
SCHS7500			9.20	
SCHS10000			11.50	
SCHS12500			14.95	
SCHS15000			18.40	

1. Measured on discrete devices prior to assembly.

Operating temperature range -55 °C to +150 °C
Storage temperature range -55 °C to +150 °C




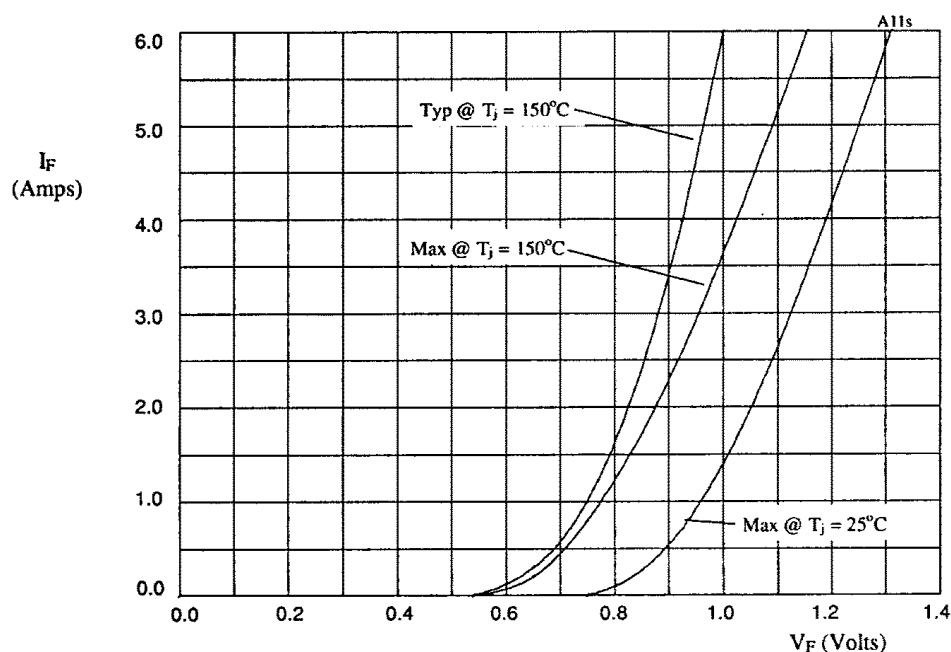


TABLE 1

DEVICE	X-AXIS
SCHS2500	x3
SCHS5000	x6
SCHS7500	x8
SCHS10000	x10
SCHS12500	x13
SCHS15000	x16

Figure 1. Forward voltage drop as a function of forward current.

January 8, 1998

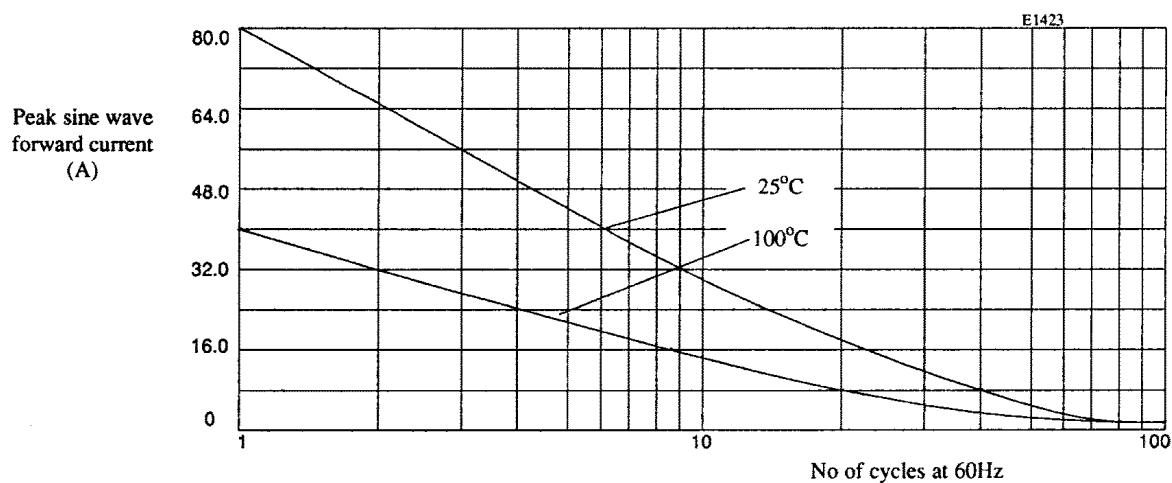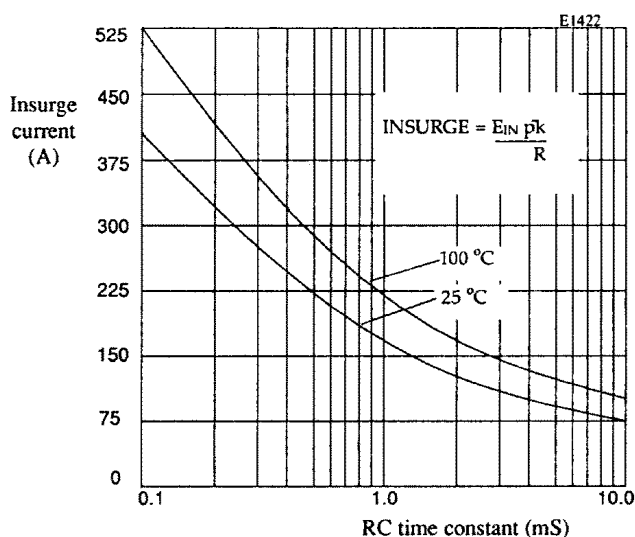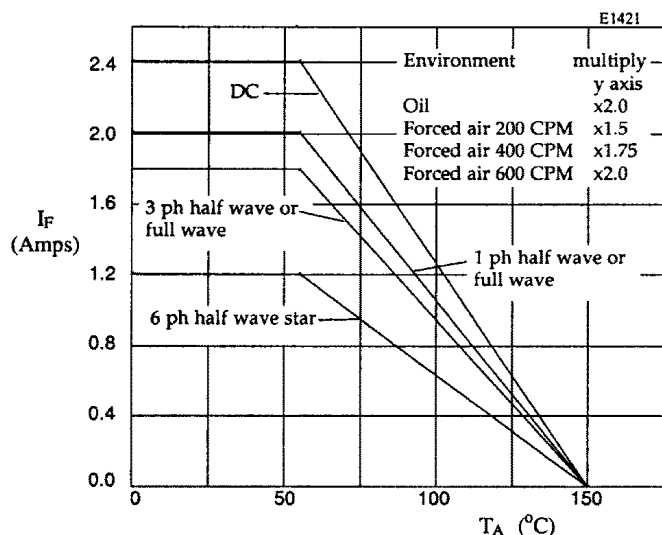

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Semtech:](#)

[SCHS15000](#) [SCHS7500](#) [SCHS10000](#) [SCHS12500](#) [SCHS2500](#)