

FICX Series


Product Datasheet

SC-L-PG11-①-②




CE RoHS

Screw type of terminal block housing



- Waterproof rating: IP68 (50m, 24hrs)
- In-house UV resistance test: 720hrs
- Accommodate a wide range of wire and cable's OD
- Quick and easy Installation
- Color Identification for sealing
- Easy-grip design

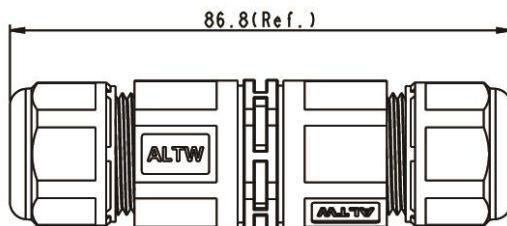

*Spanner: 24mm

General Specification

Number of Positions (Code ①)	2P (02), 3P (03), 4P (04)
Current Rating	30A for 2P 20A for 3P & 4P
Voltage Rating	450V ac/dc
Operating Temperature	-40°C to 105°C
Wire Section	14~18 AWG (0.75~2.5 mm ²)
Cable OD (Seal Color, Code ②)	● (BL): 4.5~6.5mm ● (YW): 6.6~8.5mm ● (GN): 8.6~10.5mm ● (RD): 10.6~12.5mm


Material Specification

Gland Nut	PA6+GF, Black
Gasket	Silicon, Yellow
L-Gasket	Silicon, Yellow
Seal	Silicon
Gland Pipe	PA66, Black
Terminal Block Housing	PA66+GF, Black
Contact	Brass, Nickel-Plated
Screw	Stainless Steel, Nickel-Plated

SC-L-PG12-①-②




CE RoHS

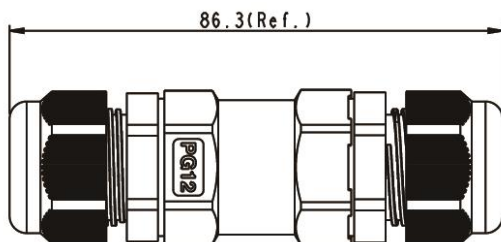

*Spanner: 24mm

■ End barrier screw type of terminal block housing



- Waterproof rating: IP68 (50m, 24hrs)
- In-house UV resistance test: 720hrs
- Accommodate a wide range of wire and cable's OD
- Quick and easy Installation
- Color Identification for sealing
- Easy-grip design

General Specification

Number of Positions (Code ①)	2P (02), 3P (03), 4P (04)
Current Rating	20A for 2P & 3P 15A for 4P
Voltage Rating	450V ac/dc
Operating Temperature	-40°C to 105°C
Wire Section	14~18 AWG (0.75~2.5 mm ²)

- Cable OD (Seal Color, Code ②)
- (BL): 4.5~6.5mm
 - (YW): 6.6~8.5mm
 - (GN): 8.6~10.5mm
 - (RD): 10.6~11.5mm

Material Specification


Gland Nut	PA6+GF, Black
Gland Body	PA66, Black
L-Gasket	Silicon, Yellow
Seal	Silicon
Gland Pipe	PA66, Black
Terminal Block Housing	PA66+GF, Black
Contact	Brass, Nickel-Plated
Screw	Stainless Steel, Nickel-Plated

SC-L-PG13-①-②





CE RoHS

- End barrier screw type of terminal block housing



- Waterproof rating: IP68 (50m, 24hrs)
- In-house UV resistance test: 720hrs
- Accommodate a wide range of wire and cable's OD
- Quick and easy Installation
- Color Identification for sealing
- Easy-grip design

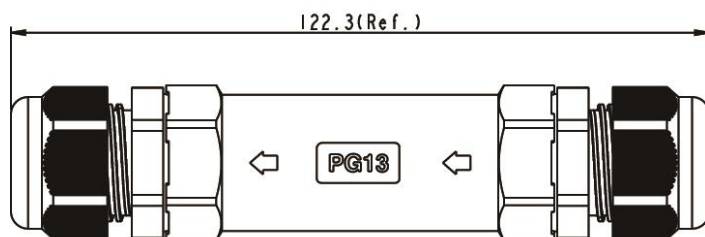

*Spanner: 24mm

General Specification

Number of Positions (Code ①)	2P (02), 3P (03), 4P (04)
Current Rating	20A for 2P & 3P 15A for 4P
Voltage Rating	450V ac/dc
Operating Temperature	-40°C to 105°C
Wire Section	14~18 AWG (0.75~2.5 mm ²)
Cable OD (Seal Color, Code ②)	● (BL): 4.5~6.5mm ● (YW): 6.6~8.5mm ● (GN): 8.6~10.5mm ● (RD): 10.6~11.5mm


Material Specification

Gland Nut	PA6+GF, Black
Gland Body	PA66, Black
L-Gasket	Silicon, Yellow
Seal	Silicon
Gland Pipe	PA66, Black
Terminal Block Housing	PA66+GF, Black
Contact	Brass, Nickel-Plated
Screw	Stainless Steel, Nickel-Plated


SC-L-PGT2-①-②



CE RoHS

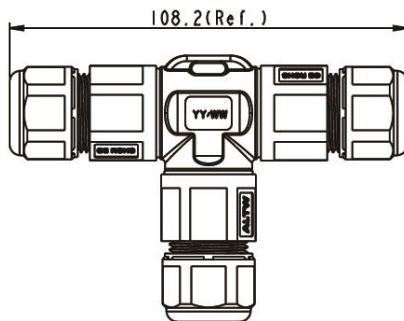

■ Screw type of terminal block housing



- Waterproof rating: IP68 (50m, 24hrs)
- In-house UV resistance test: 720hrs
- Accommodate a wide range of wire and cable's OD
- Quick and easy Installation
- Color Identification for sealing
- Easy-grip design



*Spanner: 24mm

General Specification

Number of Positions (Code ①)	2P (02), 3P (03), 4P (04)
Current Rating	20A for 2P 15A for 3P & 4P
Voltage Rating	450V ac/dc
Operating Temperature	-40°C to 105°C
Wire Section	14~18 AWG (0.75~2.5 mm ²)
Cable OD (Seal Color, Code ②)	● (BL): 4.5~6.5mm ● (YW): 6.6~8.5mm ● (GN): 8.6~10.5mm ● (RD): 10.6~12.5mm

Material Specification

Gland Nut	PA6+GF, Black
Gasket	Silicon, Yellow
L-Gasket	Silicon, Yellow
Seal	Silicon
Gland Pipe	PA66, Black
Terminal Block Housing	PA66+GF, Black
Contact	Brass, Nickel-Plated
Screw	Stainless Steel, Nickel-Plated

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Amphenol:

[SC-L-PG11-03-GN](#) [SC-L-PGT2-03-GN](#) [SC-L-PG12-03-GN](#) [SC-L-PG11-02-YW](#) [SC-L-PG11-03-BL](#) [SC-L-PG12-04-BL](#) [SC-L-PG11-04-YW](#) [SC-L-PG12-02-BL](#) [SC-L-PG12-02-GN](#) [SC-L-PGT2-02-GN](#) [SC-L-PGT2-03-YW](#) [SC-L-PGT2-03-RD](#) [SC-L-PG11-04-RD](#) [SC-L-PG11-02-RD](#) [SC-L-PG13-04-RD](#) [SC-L-PGT2-02-RD](#) [SC-L-PG13-02-RD](#) [SC-L-PG13-03-YW](#) [SC-L-PG13-03-GN](#) [SC-L-PG12-03-YW](#) [SC-L-PGT2-04-BL](#) [SC-L-PG13-04-GN](#) [SC-L-PG13-02-YW](#) [SC-L-PGT2-03-BL](#) [SC-L-PG13-02-BL](#) [SC-L-PG13-02-GN](#) [SC-L-PG13-03-RD](#) [SC-L-PG13-04-YW](#) [SC-L-PG11-03-YW](#) [SC-L-PG12-03-RD](#) [SC-L-PGT2-02-YW](#) [SC-L-PGT2-04-YW](#) [SC-L-PG11-04-GN](#) [SC-L-PG12-04-RD](#) [SC-L-PG13-04-BL](#) [SC-L-PG11-02-GN](#) [SC-L-PG12-02-YW](#) [SC-L-PG12-04-YW](#) [SC-L-PG12-04-GN](#) [SC-L-PG12-02-RD](#) [SC-L-PG12-03-BL](#) [SC-L-PGT2-02-BL](#) [SC-L-PG13-03-BL](#) [SC-L-PGT2-04-RD](#) [SC-L-PGT2-04-GN](#) [SC-L-PG11-03-RD](#) [SC-L-PG11-04-BL](#) [SC-L-PG11-02-BL](#)