



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN13B0242	2013/11/12	SAM	Change Dimension

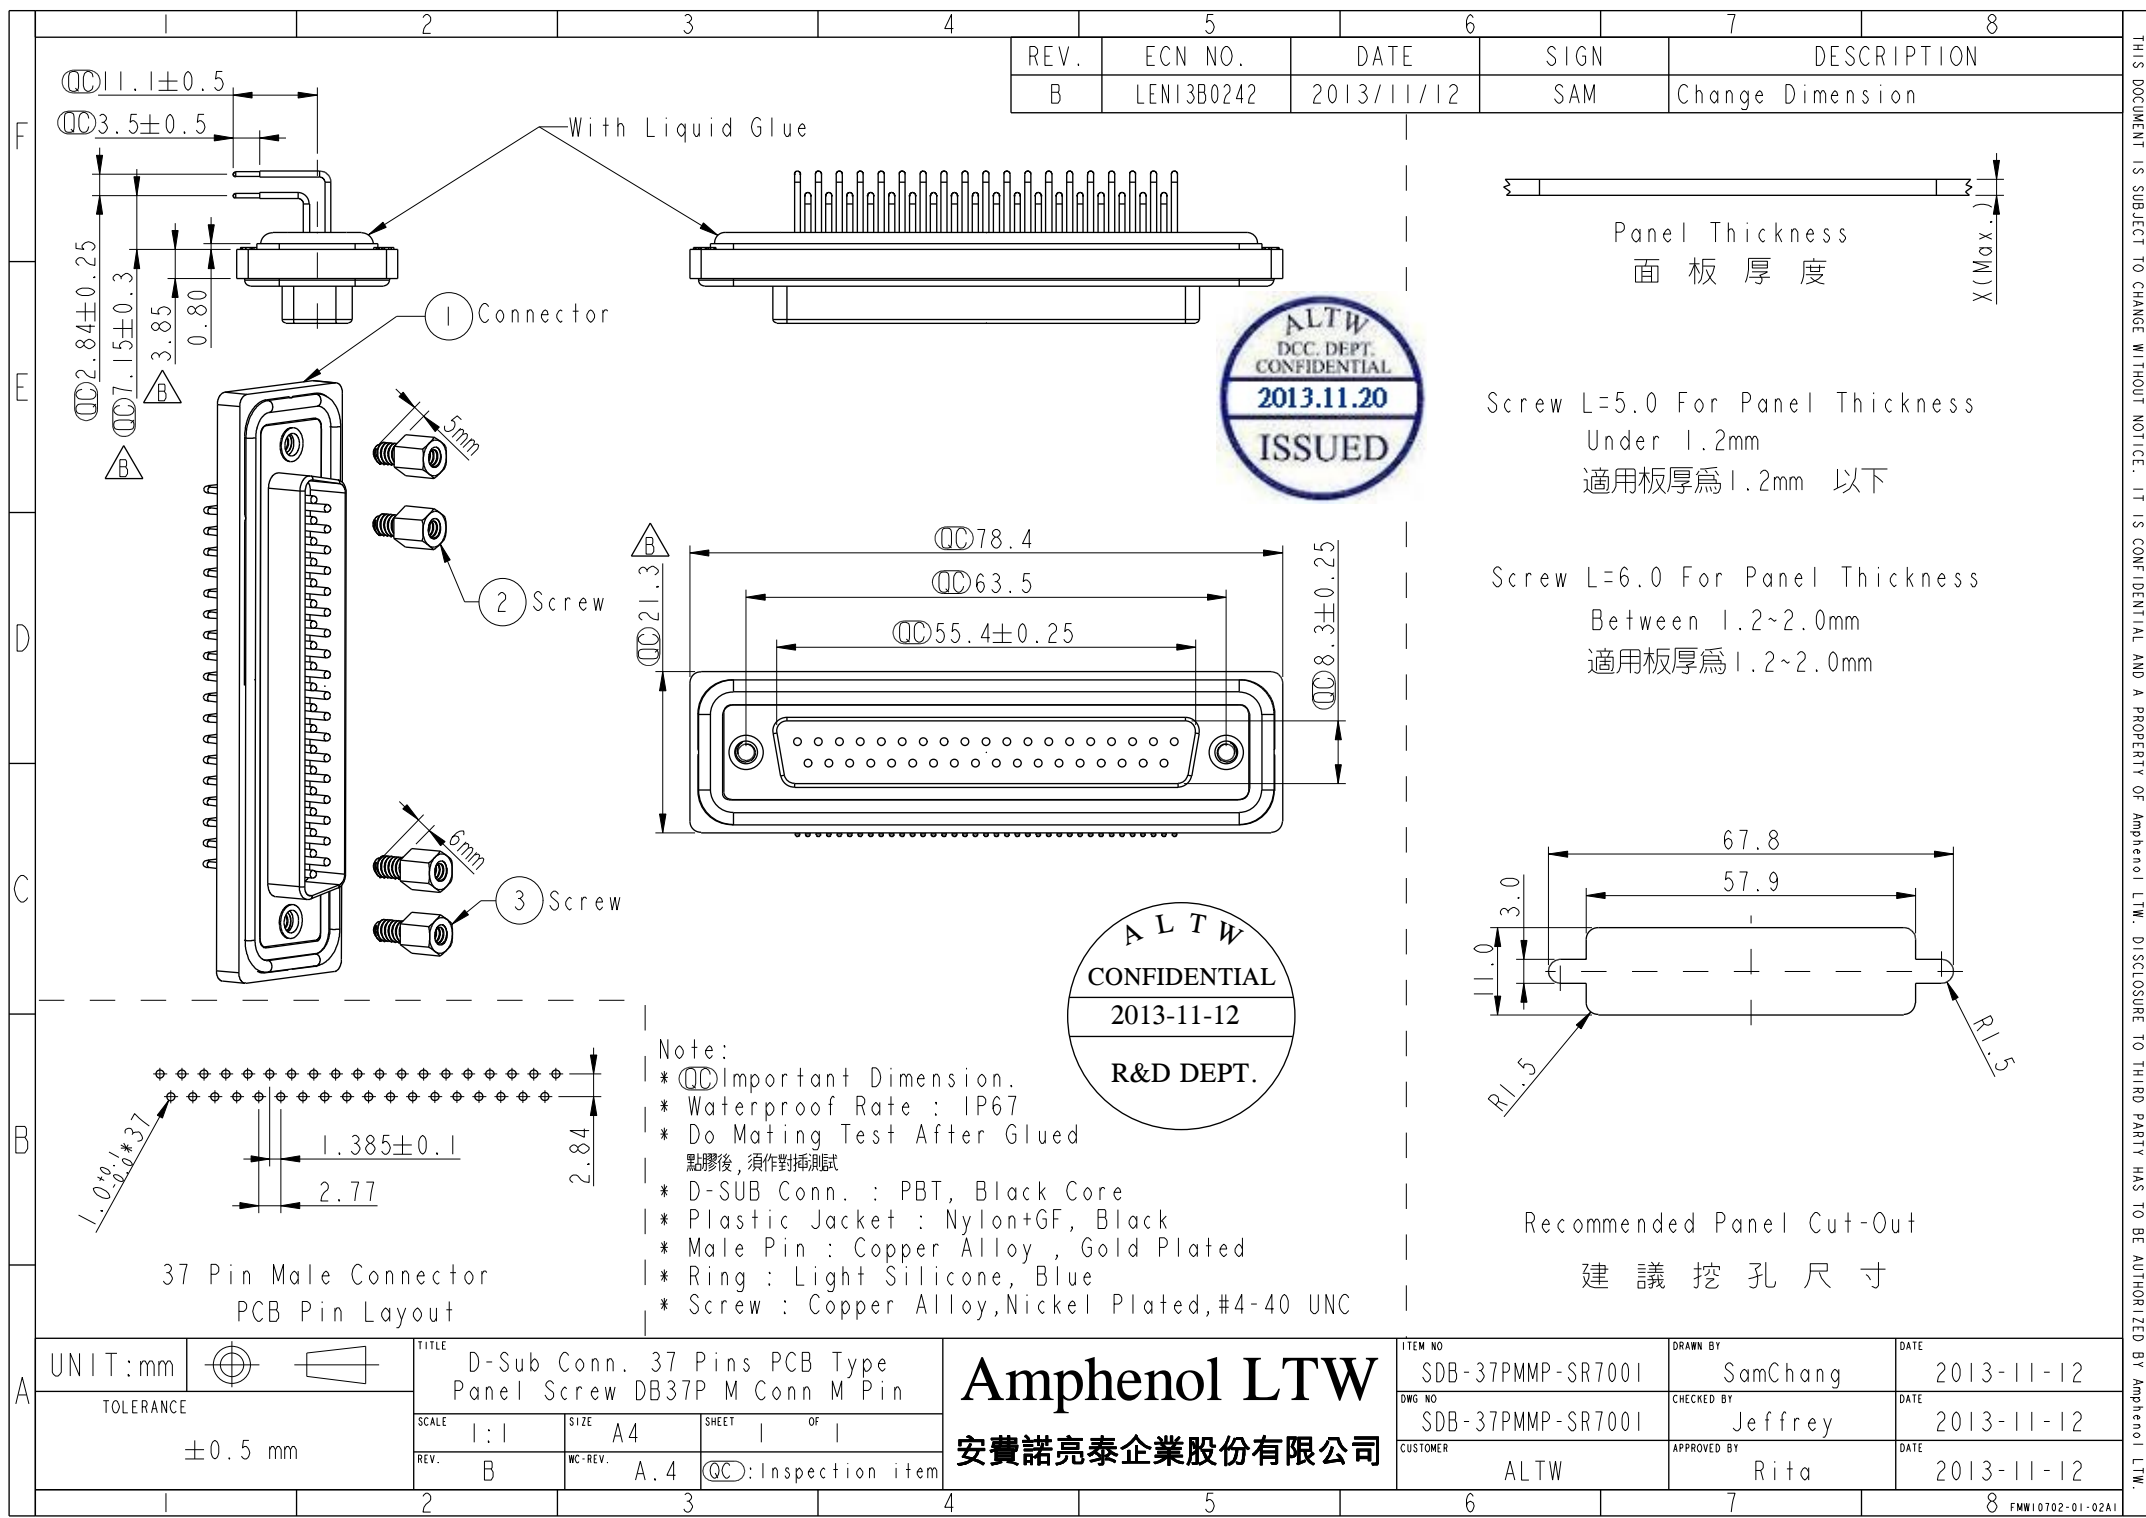



Screw L=5.0 For Panel Thickness Under 1.2mm
適用板厚為1.2mm 以下

Screw L=6.0 For Panel Thickness Between 1.2~2.0mm
適用板厚為1.2~2.0mm

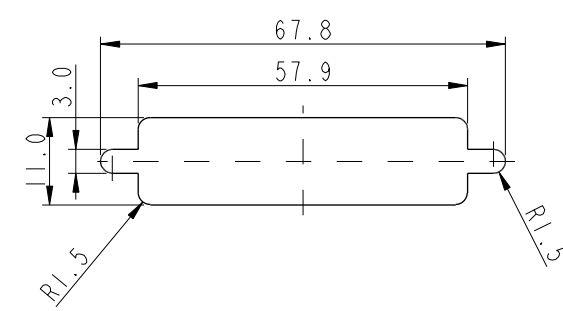

Recommended Panel Cut-Out
建議挖孔尺寸

Note:
* $\varnothing$ Important Dimension.
* Waterproof Rate : IP67
* Do Mating Test After Glued
點膠後，須作對插測試
* D-SUB Conn. : PBT, Black Core
* Plastic Jacket : Nylon+GF, Black
* Male Pin : Copper Alloy , Gold Plated
* Ring : Light Silicone, Blue
* Screw : Copper Alloy,Nickel Plated,#4-40 UNC



A	UNIT:mm		TOLERANCE		TITLE		D-Sub Conn. 37 Pins PCB Type		ITEM NO		DRAWN BY		DATE	
					Panel Screw DB37P M Conn M Pin				SDB-37PMMP-SR7001		SamChang		2013-11-12	
									SDB-37PMMP-SR7001		Jeffrey		2013-11-12	
									ALTW		Rita		2013-11-12	

Amphenol LTW
安費諾亮泰企業股份有限公司

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.