
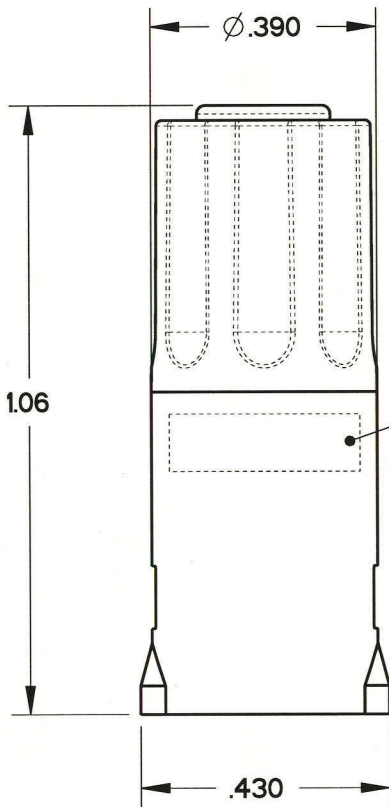
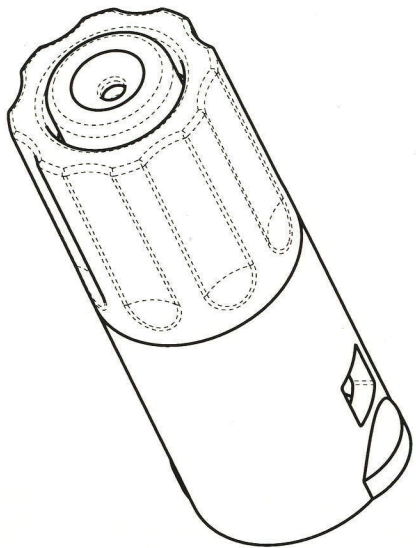


REV	ECN	APP'D
-	5663	J. TON
A	5706	J. TON
B	5720	J. TON
C	5796	JT 4-11-06



PART MARKING AS FOLLOWS:

BACC63DH0116PX APCD
YYWW SJS5162XX

DATE
CODE

SEE TABLE 1 FOR FULL PART NUMBERS

- NOTES:
- MATERIALS:
HOUSING: PA 6/6
CONTACT RETAINER: STAINLESS STEEL
GROMMET: SILICONE RUBBER PER A-A-59588
SEAL: SILICONE RUBBER PER A-A-59588
 - OPERATING RANGE:
TEMPERATURE: -65 °C TO 160 °C
INSULATION RESISTANCE: 5000 MEGOHMS MINIMUM
DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS SEA LEVEL
200 VRMS @100,000 FT. ALTITUDE
CURRENT RATING: 13 AMPS
VIBRATION: PER EIA-364-D METHOD 28
 - ACCEPTS (I) M39029/58-364 PIN CONTACT (NOT INCLUDED)
 - CONTACT RETENTION - MUST LOCK 25 LBS
 - LOCKING FEATURE - NO BREAK 25 LBS

TABLE 1 - PART NUMBER SCHEME		
APCD PART#	BACC PART#	COLOR
SJS516200	BACC63DH0116PB	BLUE
SJS516210	BACC63DH0116PR	RED

DIMENSIONS	TOLERANCES	PROJECTION	Amphenol Pcd <i>SPECIFICATION DRAWING</i>		TITLE IN-LINE JUNCTION SINGLE WIRE, SIZE 16 RECEPTACLE				
ANSI Y14.5M	.XX ±0.01								ENGR
UNITS: INCHES	.XXX ±0.005		CHKD	J. TON					10/19/05
Pro/E FILE	ANGLES ±1.0°		APPD	J. TON	10/19/05	SIZE B	DWG NO. SJS516200	REV C	
	THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF AMPHENOL PCD INC., PEABODY, MA					CODE: 58982	SCALE: 3:1	SHEET 1 OF 1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[SJS516210](#) [SJS516200](#)