
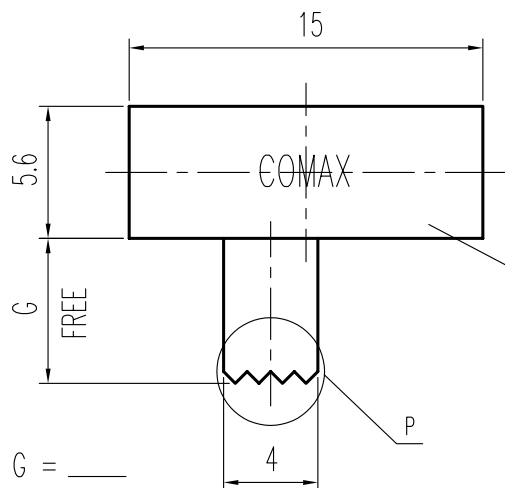


P DETAIL 2 : 1

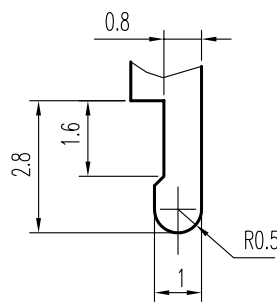

K DETAIL 2 : 1







示意图 SCHEMATIC

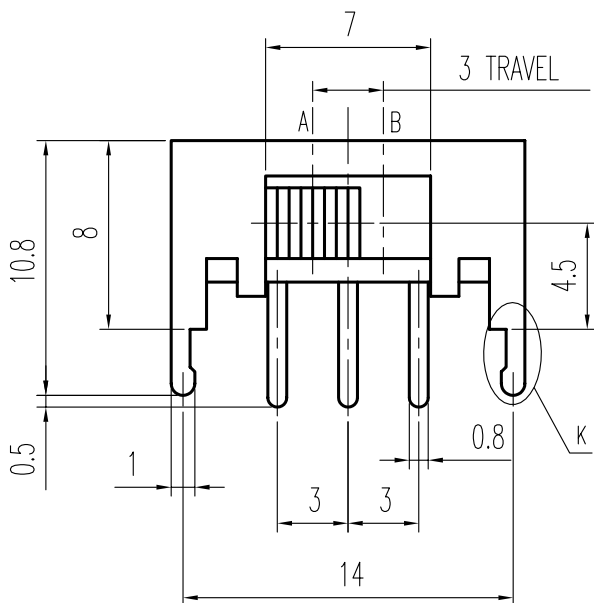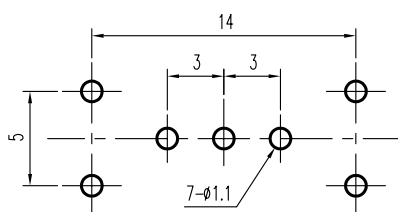

安装孔 PIERCING PLAN

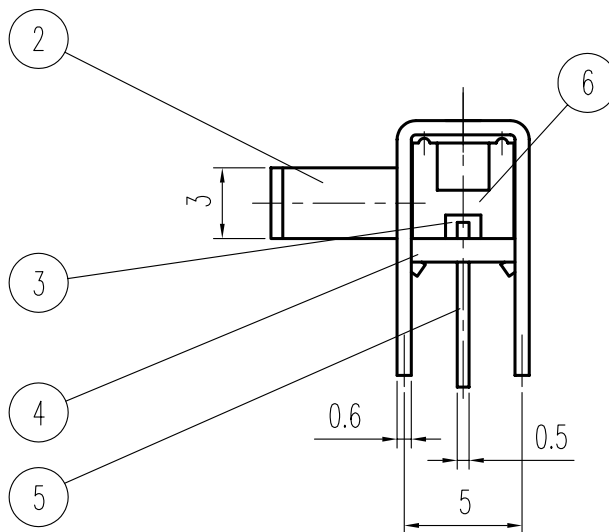

规格 Specifications

额定负荷 Ratings	DC 30 V 0.3 A
初期接触电阻 Initial Contact Resistance	30 mΩ Max.
绝缘电阻 Insulation Resistance	DC500 V 60 Sec. 100 MΩ Min.
抗电强度 Dielectric Voltage	AC 500 V (50~60HZ) 60 Sec.

操作力 Operating Force (gf)	A → B 250 ± 100	B → A 250 ± 100
负荷寿命 Operating Life With Load	10,000 Cycles	

6	弹簧 SPRING	STEEL	1	NATURAL
5	端子 TERMINAL	C2680R	3	Ag PLATED
4	基板 TERMINAL BASE	PHENOL RESIN	1	YELLOW
3	接触片 CONTACT	COPPER WIRE	1	Ag PLATED
2	胶柄 KNOB	P B T	1	G 2 - 9
1	铁壳 FRAME	S P C C	1	Sn PLATED
序NO.	零件 PART	材料 MATERIAL	数量 QTY	备注 REMARKS

A02	按触阻抗更改为初期接触电阻 见 ⑥	刘红梅	06-07-07
A01	机械寿命更改为负荷寿命 见 ⑥	张渠江	2005/4/29
标号 REV	内容 DESCRIPTION	签名 SIGN.	日期 DATE
DWG NO.		ITEM2101	

TOLERANCES UNLESS OTHERWISE SPEC.		TITLE	SIDE KNOB SLIDE SWITCH		ITEM NO	SK-12F17-G		
UNDER 1	± 0.10	DRAWN	刘红梅	06-07-07	VERSION	A02	PAGE 1	OF 1
1 - 10	± 0.30	REVIEWED	张念明	06-07-07	SCALE		UNIT	mm
OVER 10	± 0.50	APPROVED	林高全	06-07-10	PROJECTION			

COMAX ELECTRONICS (HUIZHOU) CO.,LTD.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

C&K Components:

[SK-12F17-G 7](#)