

Data Sheet

PTE5000

Hermetically Sealed Modular Pressure Sensor



Main Features

Pressure Ranges	0 to 6 up to 0 to 600 bar (gage)
Electrical Connection	Packard Electric Metri-Pack 150 Series, M12 - 4 Pole *
Pressure Connection	G1/4A DIN 3852-E, G1/4A DIN 3852-A *
Housing Material	304 Stainless Steel (1.4301)
Output Signal	4 - 20 mA, 0.5 - 4.5 VDC, 0 - 5 VDC, 0 - 10 VDC

*1 for more options see How to Order

Attributes

- Hermetically Sealed
- Rugged & Durable
- Compact & Light-weight
- Resistant to Chemical Attack
- Superior Long-Term Stability & Repeatability
- Outstanding Shock & Vibration Performance

Typical Applications

- Compressors
- Hydraulic Systems
- Agricultural Equipment
- Construction Equipment
- Heat Pumps
- Wind Energy
- HVAC Systems
- Chemical Industry

Description

The PTE5000 utilizes Kavlico's thin film strain gauge sensing technology, incorporating an hermetically sealed design with no internal sealing required. Designed for harsh environments, a rugged 304 stainless steel housing surrounds the PTE5000 transducer.

The PTE5000's small, compact design as well as its low overall weight makes it ideal for applications with spacing and weight limitations. This easy-to-use sensor is media resistant, which allows it to be used for a broad range of liquid and gaseous media. It can be used at high operating temperatures and has internal temperature compensation. Highly reliable, the PTE5000 provides accurate, high pressure measurements every time.

Technical Specifications

Pressure Ranges

from 0 to ...	bar (gage)	6	10	16	25	40	60	100	160	250	400	600
Proof pressure	bar (gage)	12	20	32	50	80	120	200	320	500	800	1200
Burst pressure	bar (gage)	60	100	160	200	320	480	600	960	1000	1600	2400

Physical

Operating Life Cycle	min. 10 million full pressure cycles over the full range
Vibration Resistance	IEC 60068-2-64 (RANDOM) 20 PSD
Shock Resistance	25 g minimum according to DIN EN 60068-2-27
Drop Test	1 meter drop on concrete as per SAE J1455 / DIN EN 60068-2-3-1
Weight	≤ 50 grams (without mating connector)
Ingress Protection	IP 65 or IP67 - depending on electrical connector
Medium Temperature	-30°C to + 120°C (others on request)
Environmental Temperature	-30°C to + 100°C (dep. on electrical connector & external seal ring capability) ^{*4}
Storage Temperature	-30°C to + 100°C (dep. on electrical connector & external seal ring capability) ^{*4}
Media	All class II fluids and gases compatible with stainless steel 304 (1.4301)

^{*4} For more details see How to Order

Performance

Accuracy ^{*1}	≤ 0.5 % of span ^{*3}
Non-linearity ^{*2}	0.2 % of span ^{*3}
Non-repeatability	0.1 % of span ^{*3}
1-year stability	0.2 % of span ^{*3}
Temp. Coefficients - Zero	0.2 % of span / 10 K within temperature range 0°C to + 80°C.2 %
Temp. Coefficients - Span	0.2 % of span / 10 K within temperature range 0°C to + 80°C.2 %

^{*1} Including non-linearity, hysteresis, non-repeatability, zero point and full scale error (corresponds to error of measurement per IEC 61298-2). Adjusted in vertical mounting position with pressure port down.

^{*2} BFSL according to IEC 61298-2 reference conditions to EN 61298-1

^{*3} Others on request

Electrical

Output Signal	4...20 mA	0.5...4.5 VDC ratiometric	0...5 VDC	0...10 VDC
Operating Supply Signal	8-30 VDC	5 VDC $\pm$ 5%	8-30 VDC	14-30 VDC
Power Consumption	$\leq$ 600 mW	$\leq$ 25 mW	$\leq$ 600 mW	$\leq$ 600 mW
Overvoltage Protection	min. 33 VDC	min. 6 VDC	min. 33 VDC	min. 33 VDC
Short-circuit Proofness	not applicable	Yes ^{*5}	Yes ^{*5}	Yes ^{*5}
Insulation Voltage	500 VDC	500 VDC	500 VDC	500 VDC
Reverse Polarity Protection	Yes ^{*6}	Yes ^{*6}	Yes ^{*6}	Yes ^{*6}
Load	$\leq (V_{sup}-8 \text{ VDC})/(0.02 \text{ A}) [\Omega]$	$\geq 4.7 \text{ k}\Omega$	$\geq 4.7 \text{ k}\Omega$	$\geq 4.7 \text{ k}\Omega$
Response Time	$\leq 5 \text{ ms max. to 63\% of full scale pressure with step change on input}$			

^{*5} for min. 3 intervals at 5 minutes each

^{*6} for min. 10 seconds on assigned pins

Approvals & Certificates

CE Compliance	Pressure equipment directive 97/23/EC EMC directive 2004/108/EEC, EN 61 326 Emission (Group 1, Class B) and Immunity (industrial locations), EMI, ESD protected
UL	Standard(s) for Safety: Electrical Equipment for Measurement, Control and Laboratory Use - UL 61010-1
ROHS	2011/65/EU ROHS Directive


Dimensions

Pressure Sensor with Electrical Connection

Dimensions in mm [Inch]


M12 Pin Call Outs

Output	Pin 1	Pin 2	Pin 3	Pin 4
4-20 mA	Vsup	...	Iout	...
0.5-4.5 VDC ratiometric	Vsup	...	Vout	GND
0-5 VDC	Vsup	...	Vout	GND
0-10 VDC	Vsup	...	Vout	GND

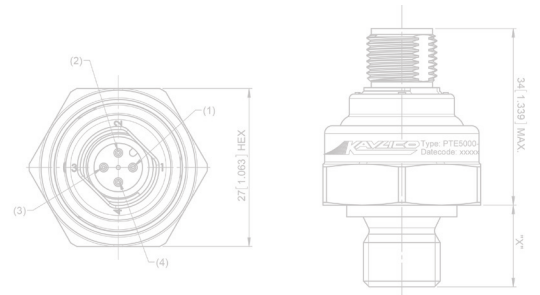


18 mm Pin Call Outs

Output	Pin 1	Pin 2	Pin 3	Pin 4
4-20 mA	Vsup	Iout	...	...
0.5-4.5 VDC ratiometric	Vsup	Vout	GND	...
0-5 VDC	Vsup	Vout	GND	...
0-10 VDC	Vsup	Vout	GND	...

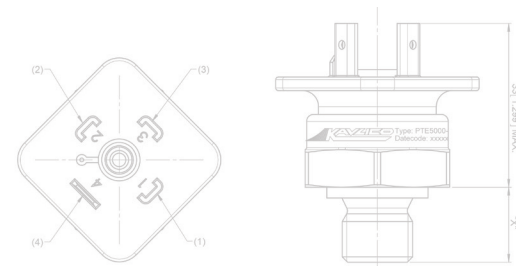


Packard (metri-pack 150) Pin Call Outs

Output	Pin 1	Pin 2	Pin 3
4-20 mA	Iout	Vsup	...
0.5-4.5 VDC ratiometric	GND	Vsup	Vout
0-5 VDC	GND	Vsup	Vout
0-10 VDC	GND	Vsup	Vout

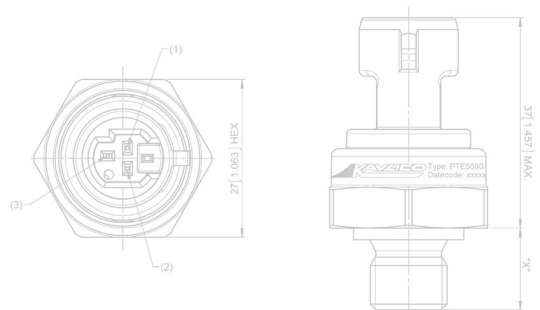



9.4 mm Pin Call Outs

Output	Pin 1	Pin 2	Pin 3	Pin 4
4-20 mA	Vsup	Iout	...	...
0.5-4.5 VDC ratiometric	Vsup	Vout	GND	...
0-5 VDC	Vsup	Vout	GND	...
0-10 VDC	Vsup	Vout	GND	...


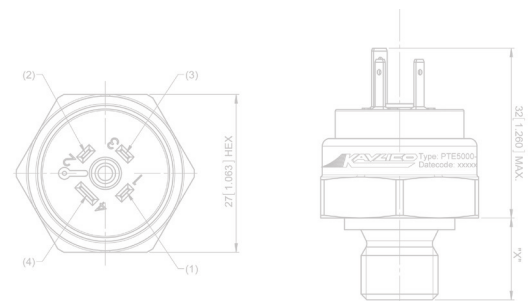


Pressure Connections and Recommended Installation Torque

Dimensions in mm [Inch]




Name	G1/4A DIN 3852-E	7/16-20 UNF-2B SAE J1926-1
Thread	External	Internal
Torque	20 Nm	20 Nm



Name	7/16-20 UNF-2A SAE J1926-2	G1/4A DIN 3852-A
Thread	External	External
Torque	20 Nm	20 Nm

How to Order

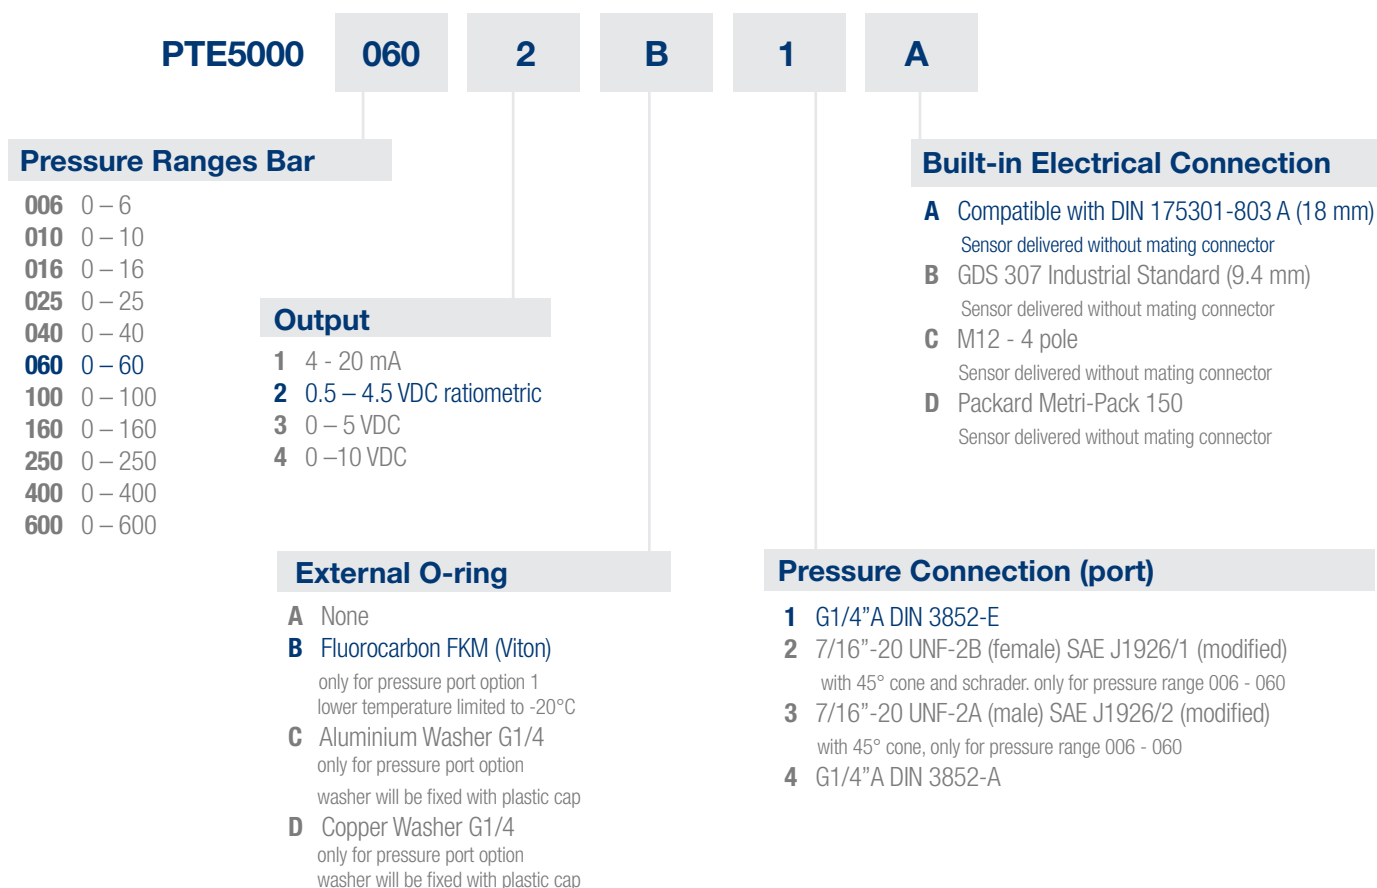

Example:

PTE5000 -060 - 2 - B - 1 - A

Description:

PTE5000 Sensor, 0 - 60 Bar Gage, 0.5 - 4.5 VDC Ratiometric Electrical Output, Fluorocarbon FKM (Viton) External O-Ring, G1/4" A DIN 3852-E Pressure Connection, with Built-in Connector Compatible with DIN175301-803 A (18mm)



Before installation and operation, ensure that the appropriate pressure sensor has been selected in terms of pressure range, design and specific measuring conditions. Non-compliance can result in serious injury and/or damage to the equipment.

Warning: The product information contained in this catalogue is given purely as information and does not constitute a representation, warranty or any form of contractual commitment. Kavlico reserve the right to modify their products without notice. It is imperative that we should be consulted over any particular use or application of our products and it is the responsibility of the buyer to establish, particularly through all the appropriate tests, that the product is suitable for the use or application. Under no circumstances will our warranty apply, nor shall we be held responsible for any application (such as any modification, addition, deletion, use in conjunction with other electrical or electronic components, circuits or assemblies, or any other unsuitable material or substance) which has not been expressly agreed by us prior to the sale of our products.

- Manufacturing Facility
- Commercial Office



Contact Information

North America

Custom Sensors & Technologies (CST)
235 E. Main St., Suite 102A
Northville, MI 48167, USA
Phone: +1 (248) 465-0815
Fax: +1 (248) 465-0810
E-mail: pressure.sensors@kavlico.com

India

Custom Sensors & Technologies (CST)
Trident Tower, No. 23, 4th Floor, 100 Feet Road
Ashoka Pillar Road, 2nd Block, Jaydnagar
Bangalore - 560011, India
Phone: +91 80 4113-2204/05
Fax: +91 80 4113-2206
E-mail: india@cstsensors.com

Europe

Custom Sensors & Technologies (CST)
Potsdamer Strasse 14
32423 Minden, Germany
Phone: +49 571 3859-0
Fax: +49 571 3859-119
E-mail: info@kavlico.de

South Korea

Custom Sensors & Technologies (CST)
14F, Kbiz DMC Tower, 189,
Seongam-ro, Mapo-gu,
Seoul, Korea 121-904
Phone: +82 2 2629-8312
Fax: +82 2 2629-8310
E-mail: korea@cstsensors.com

China

Custom Sensors & Technologies (CST)
11th Floor, Chang Feng
International Tower, 89
Yunling Road (east), Putuo District
Shanghai - 200062, China
Phone: +86 (21) 8025 7166
Fax: +86 (21) 6107 1771
E-mail: china@cstsensors.com

East Asia & Pacific Countries

Custom Sensors & Technologies (CST)
10/F, Wharf T&T Centre, Harbour City,
7 Canton Road, Tsim Sha Tsui,
Kowloon, HONG KONG
Phone: +852 3960 6473
Fax: +852 3669 7111
E-mail: eap@cstsensors.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Kavlico:

PTE5000-400-4-C-4-D	PTE5000-400-4-C-4-Z	PTE5000-016-4-A-4-D	PTE5000-600-1-B-1-A	PTE5000-016-4-D-4-Z
PTE5000-400-2-A-4-X	PTE5000-400-4-A-1-Y	PTE5000-400-4-A-3-Y	PTE5000-400-2-C-4-Y	PTE5000-400-3-A-3-C
PTE5000-400-1-A-3-C	PTE5000-400-2-A-1-A	PTE5000-016-3-D-4-B	PTE5000-016-3-D-4-W	PTE5000-016-3-B-1-D
PTE5000-040-2-D-4-D	PTE5000-040-3-A-3-C	PTE5000-040-3-A-4-Z	PTE5000-400-4-B-1-X	PTE5000-016-3-C-4-X
PTE5000-016-3-D-4-C	PTE5000-400-4-A-1-C	PTE5000-016-3-A-1-Z	PTE5000-016-3-B-1-Z	PTE5000-400-4-A-3-Z
PTE5000-400-4-A-4-Y	PTE5000-016-3-A-1-X	PTE5000-016-3-A-2-B	PTE5000-400-4-A-1-B	PTE5000-016-3-D-4-Y
PTE5000-400-4-B-1-Y	PTE5000-016-3-C-4-V	PTE5000-400-4-A-3-C	PTE5000-400-4-A-1-A	PTE5000-400-4-A-3-B
PTE5000-400-4-A-3-W	PTE5000-400-3-D-4-X	PTE5000-400-3-A-4-D	PTE5000-400-3-B-1-A	PTE5000-400-3-C-4-W
PTE5000-400-4-A-4-Z	PTE5000-016-4-A-1-A	PTE5000-400-3-D-4-W	PTE5000-400-4-A-3-A	PTE5000-400-4-A-1-V
PTE5000-400-3-A-4-V	PTE5000-400-3-A-4-B	PTE5000-400-3-D-4-Z	PTE5000-400-3-A-4-Y	PTE5000-400-2-A-3-W
PTE5000-400-2-A-3-Y	PTE5000-400-2-B-1-Y	PTE5000-400-2-D-4-X	PTE5000-400-3-B-1-V	PTE5000-400-2-A-3-X
PTE5000-400-2-D-4-Y	PTE5000-400-1-D-4-Y	PTE5000-400-1-A-3-W	PTE5000-400-1-B-1-V	PTE5000-400-3-A-3-V
PTE5000-400-1-A-3-Z	PTE5000-400-2-A-4-B	PTE5000-400-2-A-3-B	PTE5000-400-2-A-4-Y	PTE5000-400-3-B-1-B
PTE5000-400-2-A-3-V	PTE5000-400-1-B-1-Y	PTE5000-400-2-A-1-C	PTE5000-400-2-A-1-D	PTE5000-016-3-A-4-C
PTE5000-250-4-D-4-Y	PTE5000-400-1-A-1-X	PTE5000-400-2-A-4-C	PTE5000-400-2-D-4-D	PTE5000-400-3-A-1-X
PTE5000-400-2-A-4-D	PTE5000-250-4-D-4-B	PTE5000-400-1-A-1-B	PTE5000-400-3-A-3-B	PTE5000-400-3-A-3-W
PTE5000-400-1-B-1-X	PTE5000-400-2-A-3-Z	PTE5000-400-3-C-4-C	PTE5000-400-3-C-4-Z	PTE5000-400-2-A-4-W
PTE5000-400-2-A-4-Z	PTE5000-400-2-B-1-B	PTE5000-400-2-C-4-A	PTE5000-400-1-D-4-B	PTE5000-400-1-D-4-Z
PTE5000-250-4-B-1-C	PTE5000-250-4-B-1-X	PTE5000-400-1-C-4-C	PTE5000-400-3-A-3-D	PTE5000-400-2-B-1-D
PTE5000-400-3-A-1-V	PTE5000-016-3-B-1-A	PTE5000-250-4-C-4-C	PTE5000-400-1-A-1-C	PTE5000-400-1-A-1-V