

4 A with power limitation

SL4.100

- Input: AC 230V / 115V, DC 210-375V
- Output: 24V / 4A
- 100 VA Limited Power Source
- No switch-off at overload
- Quasi-Wide-Range Input
- Robust mechanics and EMC
- NEC Class 2 Power Supply

PULS



CB
scheme
IEC60950

UL
US

UL508 LISTED
IND. CONT. EQ.
18 WM, 60°C

C
UL
US

UL60950 E137005
CUL/CSA-C22.2
No 950-M90

CE

EMC and
Low Volt.
Directive

Data sheet

Input

Input voltage	AC100-120/220-240 V (switchable), 47-63 Hz (85-132 VAC / 176-264 VAC, 210-375 VDC, see also „Output: Continuous Loading“)
---------------	---

Quasi-Wide-Range Input: With the switch in the 230V position the power-supply unit operates at low and moderate loads (up to 2 A) at any input voltage between 95 and 264 VAC.

Note: At DC input, always leave the switch in the 230V position

Input current	< 2.0 A (switch in 115V position) < 1.1 A (switch in 230V position)
---------------	--

DCin at open output	typ. 5 mA (preserves battery sources)
---------------------	---------------------------------------

Inrush current	typ. < 15 A at 264 V AC and cold start
----------------	--

Unit is internally fused (fuse not accessible). External fuse not necessary, but recommended (common thermomagnetic 10A, B-type 'circuit-breaker' switch used anyway to fuse the input lines).

Transient handling	Transient resistant acc. to VDE 0160 / W2 (750 V / 1.3 ms), for all load conditions.
--------------------	---

Hold-up time	> 20 ms at 196 VAC, 24 V / 4 A (see diagram overleaf)
--------------	--

Efficiency, Reliability etc.*

Efficiency	typ. 88 % (230 VAC, 24 V / 4 A)
------------	---------------------------------

Losses	typ. 13.6 W (230 VAC, 24 V / 4 A)
--------	-----------------------------------

Life cycle (electrolytics)	The unit exclusively uses longlife electrolytics, specified for +105°C (cf. 'The SilverLine', p.2).
----------------------------	---

Construction / Mechanics*

Housing dimensions and Weight

- W x H x D 65 mm x 124 mm x 102 mm (+ DIN rail)
- Free space for above/below 25 mm recommended
- ventilation left/right 15 mm recommended
- Weight 620 g

Design advantages:

- All connection blocks are easy to reach as mounted at the front panel.
- Input and output are strictly apart from each other and so cannot be mixed up (Input below, output above).

* For further information see data sheets „The SilverLine“, „SilverLine Family Branches“

Order information

Order number	Description
SL4.100	
SLZ01	Screw mounting set, two needed per unit

Output

Output voltage	24 V DC +5% -1%
Output noise suppression	Radiated EMI values below EN 61000-6-3, even when using long, unscreened output cables.

Ambient temperature range T _{amb}	Operation: -10°C...+70°C (>60°C Derating) Storage: -25°C...+85°C
--	---

Continuous loading (T _{amb} = -10°C...+60°C, convection cooling), see also diagram overleaf For start at T _{amb} <0°C and low input voltage, please contact PULS.	Switch	AC/DCin	I _{out}
230V		176-264 V	ACin 4 A
		95-176 V	ACin 3 A
		210-375 V	DCin 4 A
		150-210 V	DCin 3 A
115V		100-150 V	DCin 2 A
		85-132 V	ACin 4 A


Output is protected against short circuit, open circuit and overload.

Derating	typ. 3 W/K (at T _{amb} =+60°C...+70°C)
Voltage regulation	better 2% V _{out} over all
Ripple / Noise	< 25 mV _{pp} (20 MHz bandw., 50 Ω measurem.)
Overvolt. protection	typ. 29 V
Parallel operation	yes
Power back immunity	26 V
Front panel indicator	Green LED on front panel, goes out at V _{out} < 12 V


Start / Overload Behaviour

Start-up delay	typ. 0.1 s
Rise time	appr. 5-30 ms, depending on load
Overload behaviour	Unit fulfills the requirements under Ltd. Power Source acc. to EN60950, para. 2.11, as follows: • P_{out} < 100 VA at all load conditions • I_{out} < 8 A at all load conditions


Output Current over Input Voltage (min.)

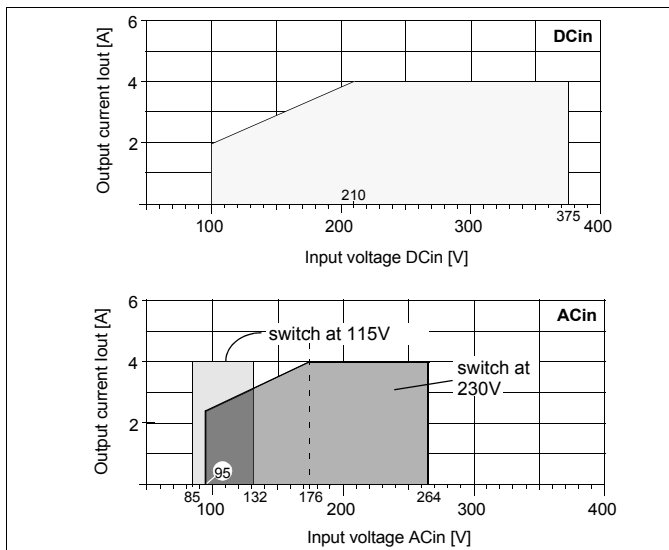


Output characteristic (typ.)

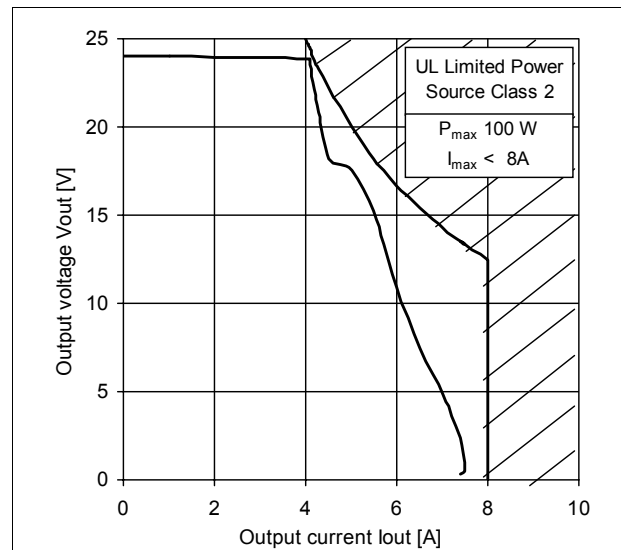

Efficiency (min.)

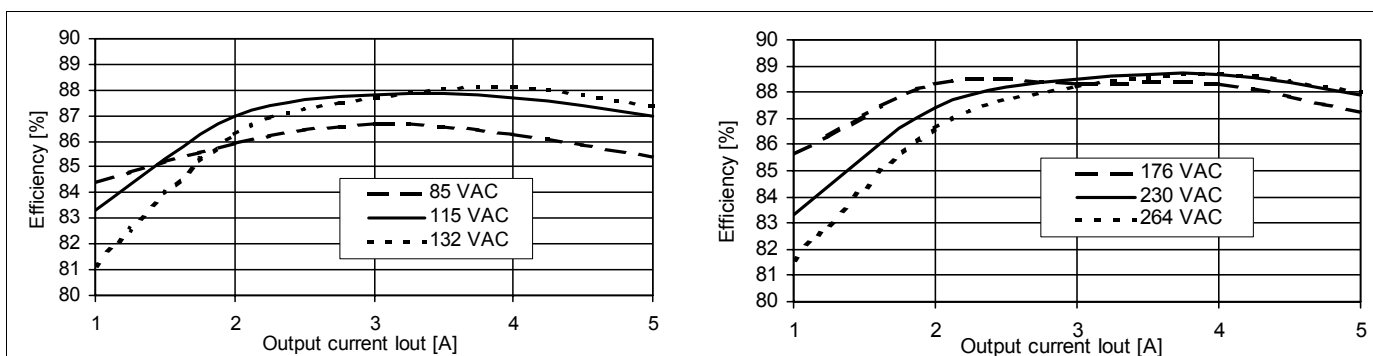

Hold-up time (min.)

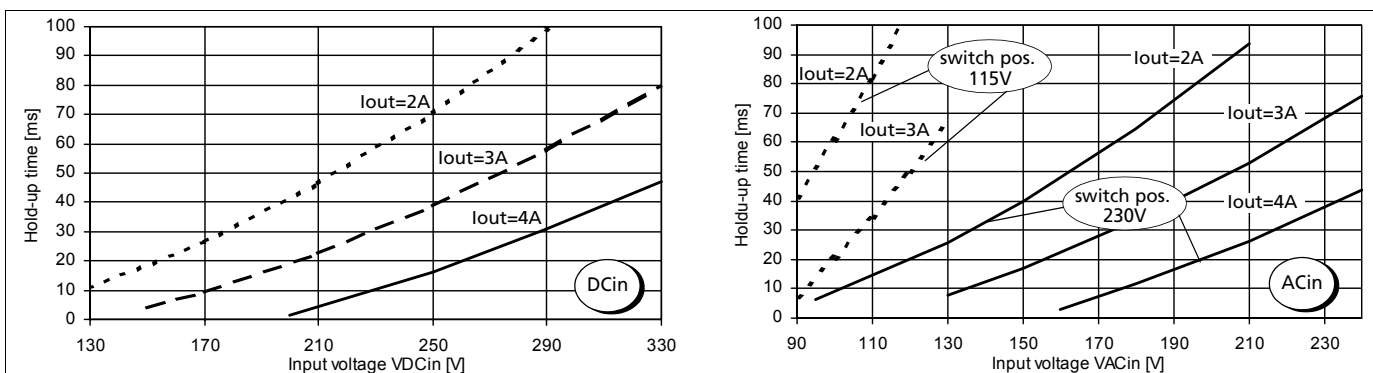

For further information, especially about

- EMC
- Connections
- Safety, Approvals
- Mechanics and Mounting,

see page 2 of the „The SilverLine“ data sheet.

Unless otherwise stated, specifications are valid for AC 230V input voltage, +25°C ambient temperature, and 5 min. run-in time. They are subject to change without prior notice.

Your partner in power supply:



PULS GmbH

Arabellastraße 15
D-81925 München
Tel.: +49 89 9278-0
Fax: +49 89 9278-199
www.puls-power.com