


PART NUMBER	STUD SIZE	DIMENSIONS in.				
PREFIX		A $\pm .03$ (.8)	W $\pm .01$ (.3)	C $\pm .015$ (.4)	M $\pm .03$ (.8)	H $\pm .010$ (.25)
PNF18-5SLF	#5	.75 (19.0)	.26 (6.6)	.19 (4.7)	.63 (16.1)	.124 (3.15)
PNF18-6SLF	#6	.75 (19.0)	.27 (6.9)	.19 (4.7)	.63 (16.1)	.136 (3.45)
PNF18-8SLF	#8	.80 (20.4)	.29 (7.4)	.23 (5.8)	.68 (17.2)	.162 (4.11)
PNF18-10SLF	#10	.81 (20.7)	.33 (8.3)	.23 (5.8)	.68 (17.2)	.188 (4.78)

NOTES:

- USED FOR:
 - 600V MAX VOLTAGE RATING (1000V. MAX. IN SIGNS, FIXTURES & LUMINARIES)
 - 221°F (105°C) MAX TEMP RATING
 - 22-18 AWG STRANDED COPPER WIRE
- INSTALLATION TOOLS:
 - UL LISTED AND CSA CERTIFIED FOR: CT-510
 - PANDUIT APPROVED: CT-400, CT-500, CT-1550 & CT-1551.
- WIRE STRIP LENGTH: $7/32^{+1/32}_{-0}$ (5.6 $^{+.8}_{-0}$)
- MAX WIRE INSULATION DIA: .145 (3.68)
MIN WIRE INSULATION DIA: .080 (2.03)
- MATERIAL:
 - STAMPING: .03 (.8) TIN PLATED COPPER
 - HOUSING : RED NYLON
 - SLEEVE : TIN PLATED BRASS
- PACKAGING:
 - STD PKG.: -C = 100
 - BULK ONLY: -M = 1000
- DIMENSIONS IN BRACKETS ARE IN MILLIMETERS OR mm²

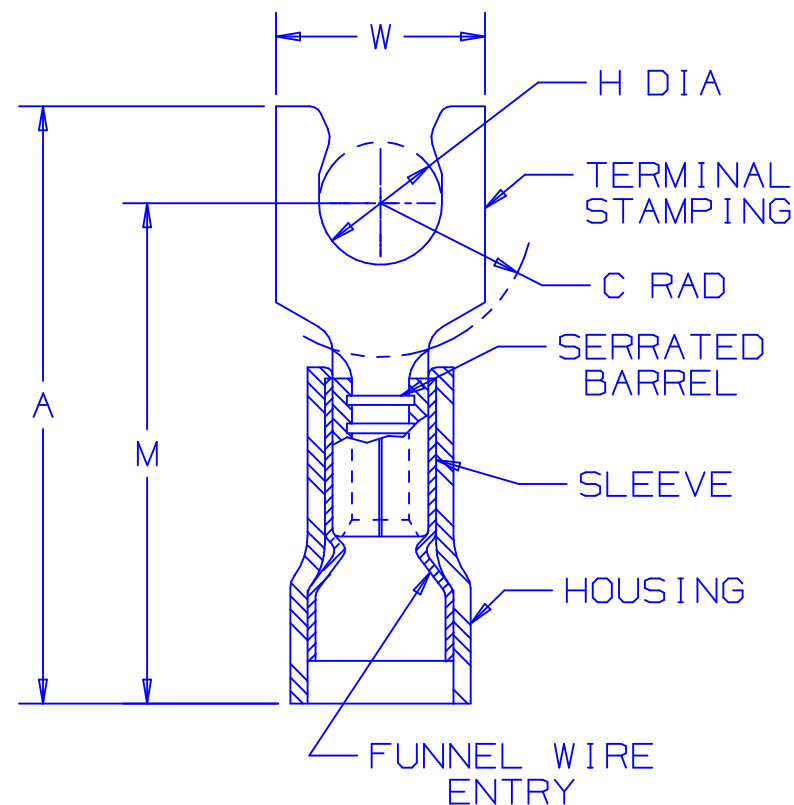

LISTED
587H
E52164



CERTIFIED
LR31212

06	5/04	JHNU		REVISED NOTE 6, REMOVED PK COLUMN			
05	1/01	KMD	SKB	CAD FILE SPEC. WAS N41251AA_PCD_04	08938	CCH	JAC
04	12/96	JAMB		UPDATED & ADDED TO NOTES, "MIN. WIRE INSUL. DIA."			
03	9/95	MS	RLS	UPDATED NOTES AND DIMENSIONS	05383		
02	6/92	BK	RS	UPDATED	01064	JMO	LA
REV	DATE	BY	CHK	DESCRIPTION	ECN	PM	APP

A41251_06

PANDUIT

CORP.

TINLEY PARK, ILLINOIS

#22-18 BARREL FUNNELED ENTRY NYLON
INSULATED SHORT LOCKING FORK,
.145 (3.68) MAX WIRE INSUL. DIA.

DRAWN BY

DAW

CHK'D

RLS

SCALE

NONE

DRAWING NO.

A41251

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit:

[PNF18-10SLF-M](#) [PNF18-5SLF-C](#) [PNF18-8SLF-M](#) [PNF18-10SLF-C](#) [PNF18-6SLF-C](#)