

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20

© COPYRIGHT 20

BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

変更

P

LTR

DESCRIPTION

DATE

DWN

APVD

A






RELEASED

ECR-08-017654

22JUL08

YS


HY

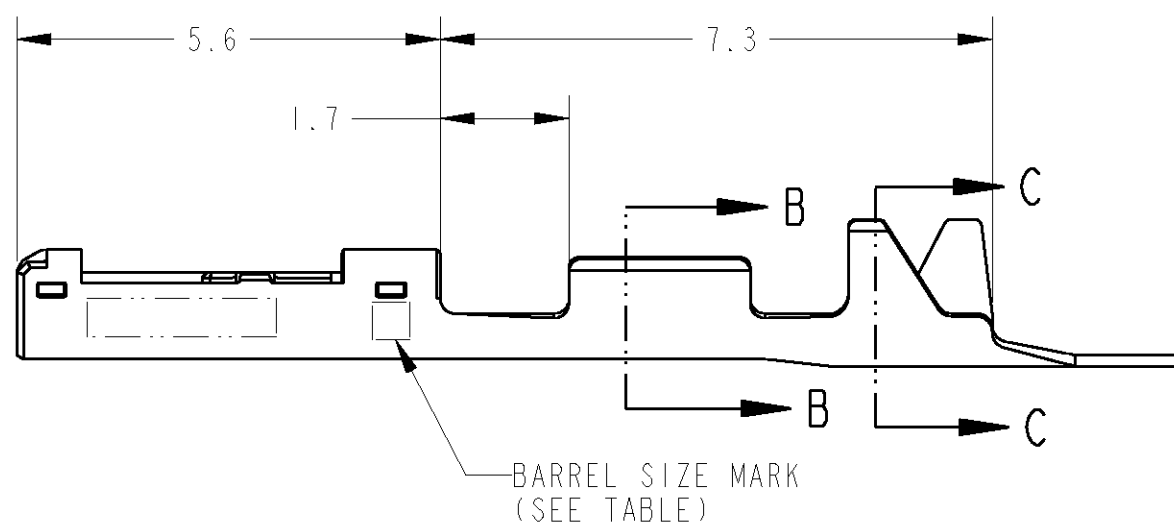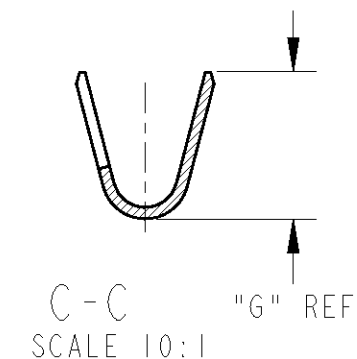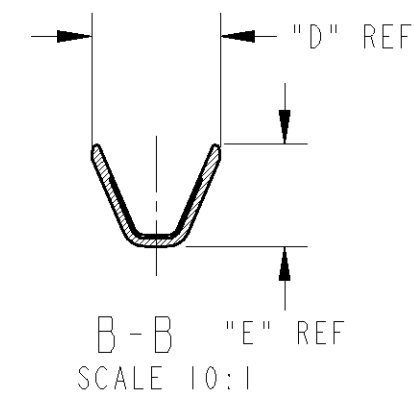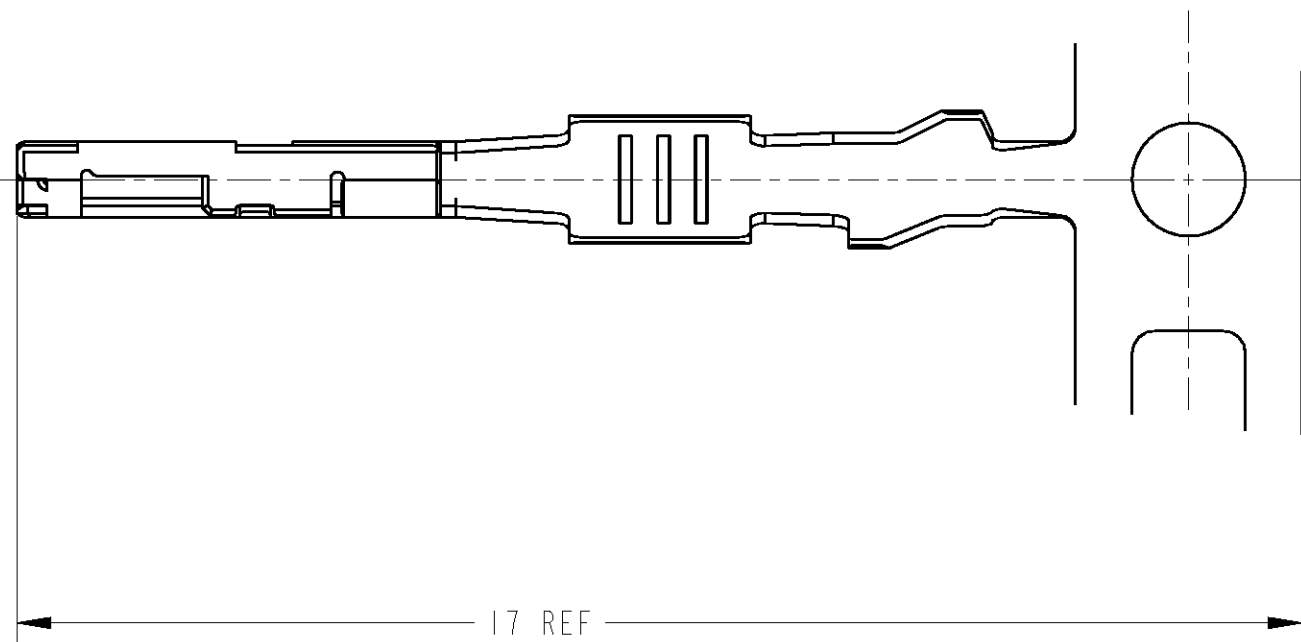

1. 適用電線; CHFUS 0.13~0.5mm<sup>2</sup>
2. 圧着作業については、下記の規格を参照すること  
取付適用規格; 114-5379
3. アプリケータ送りピッチ; 7mm

1. APPLICABLE WIRE RANGE; CHFUS 0.13~0.5mm<sup>2</sup>
2. MUST BE REFERRED TO THE FOLLOWING  
DOCUMENTS FOR CRIMPING OPERATION  
APPLICATION SPEC; 114-5379
3. APPLICATOR FEED; 7mm

	Ø0.85~0.95	0.13mm <sup>2</sup>	1.74	1.82	1.26	1.7	S	0.50 REC (S)	1827855-4
	Ø1.3~1.5	0.22~0.35mm <sup>2</sup>	2.45	2.1	1.35	1.7	C	0.50 REC (C)	1827855-3
	Ø1.1~1.4	0.35~0.5mm <sup>2</sup>	2.45	2.1	1.7	1.8	L	0.50 REC (L)	1827855-2
1903365-1	Ø0.95~1.2	0.22~0.35mm <sup>2</sup>	1.95	1.82	1.35	1.7	M	0.50 REC (M)	1827855-1
LOOSE PIECE	INS RANGE	WIRE RANGE	G	F	E	D	BARREL SIZE MARK	NAME	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION.  
IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION  
SHOULD BE CONTACTED FOR THE LATEST REVISION.DIMENSIONS:  
単位: 概  
mmTOLERANCES UNLESS  
OTHERWISE SPECIFIED:

一般公差	±0.3
0-PLC	±
1-PLC	±0.3
2-PLC	±0.10
3-PLC	±0.001
4-PLC	±0.0001
ANGLES	±3'00"

MATERIAL  
材料 COPPER ALLOYFINISH  
仕上 PRE-TIN

DWN 25APR05

Y. SUEMITSU

CHK 25APR05

K. SAKAMAKI

APVD 25APR05

S. ISOHATA

PRODUCT SPEC

108-78208

APPLICATION SPEC

114-5379

WEIGHT

0.1 g

Tyco Electronics

Tyco Electronics AMP K.K.  
Kawasaki, JapanNAME  
名称 RECEPTACLE CONTACT, CRIMP TYPE,  
0.50 SERIES  
メス端子, 圧着タイプ, 0.50シリーズ

SIZE	CAGE CODE	DRAWING NO 番号	RESTRICTED TO
A3	00779	C=1827855	-

CUSTOMER DRAWING

SCALE  
尺度 10:1

SHEET 1 OF 1 REV A

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1827855-1](#) [1827855-1 \(Mouser Reel\)](#)