


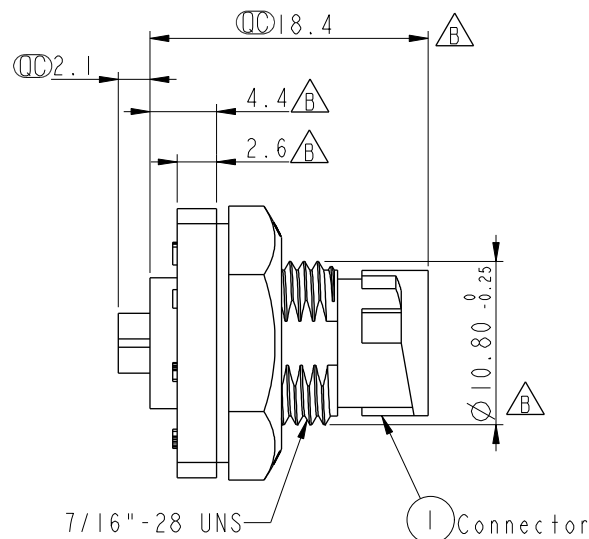



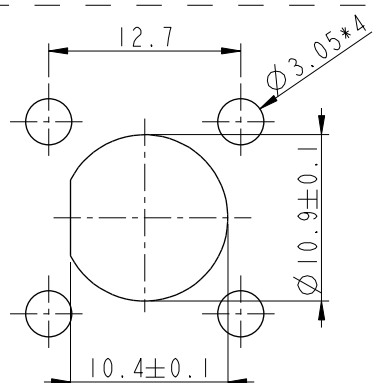


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-750096	2007/04/23	A.F. Valentino	Changed Precision Of Dimensions And Applied New Format
C	LEN-8A0151	2008/09/15	Shin	Add Notes

B

Pin Assignments
Front View

Recommended Panel Cut-Out

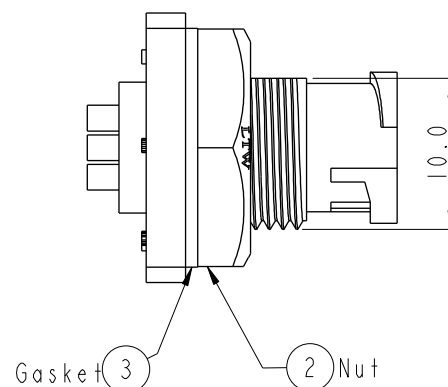


Note:

- * $\varnothing$ Important Dimension.
- * Waterproof Rate: IP67
- * Housing: Black, Nylon+GF
- * Pin: Copper Alloy, Gold Plated
- * Nut: Black, Nylon+GF
- * Gasket: Black, EPDM

$\triangle$ * Use with waterproof cap or dust cap
Panel Thickness max: 2.5mm

$\triangle$ * Use without waterproof cap or dust cap
Panel Thickness max: 3.5mm

UNIT:mm



TOLERANCE
.X ± 0.25
.XX ± 0.1
.XXX ± 0.05
ANGLES $\pm 1^\circ$

TITLE
Mini
Panel Lock 5Pin M Conn. M Pin

SCALE 2:1 SIZE A4 SHEET 1 OF 1
REV. C WC-REV. A.1 $\varnothing$ Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO.	AU-05PMMS-LS7001	DRAWN BY	SamChang	DATE	2012-05-02
DWG NO.	AU-05PMMS-LS7001	CHECKED BY	Jeffrey	DATE	2012-06-11
CUSTOMER	ALTW	APPROVED BY	Lion	DATE	2012-06-11