


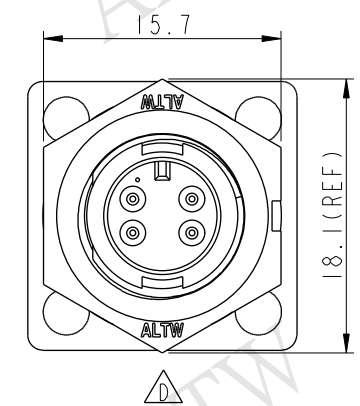
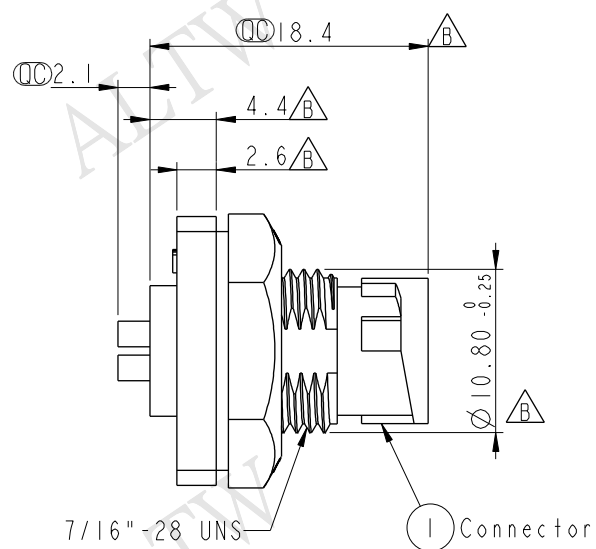
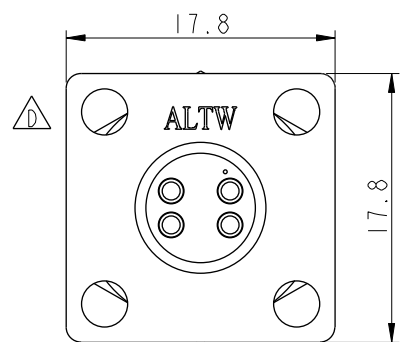


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-750094	2007/04/23	A.F. Valentino	Changed Precision Of Dimensions And Applied New Format
C	LEN-8A0144	2008/09/15	Shin	Add Notes
D	LEN1640074	2016/03/30	Vicky	Update Logo



Pin Assignments
Front View

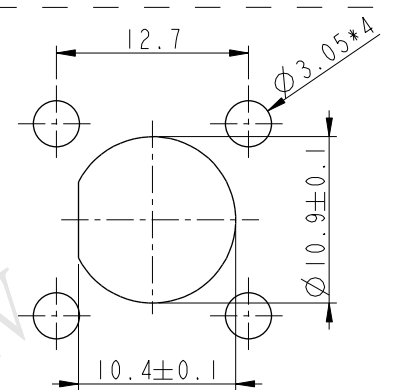

Recommended Panel Cut-Out

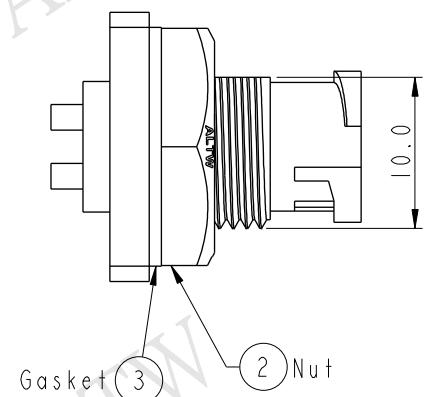

- Note:
- * Ⓢ Important Dimension
 - * Waterproof Rate: IP67
 - * Housing: Nylon+GF, Black
 - * Male Pin: Copper Alloy, Gold Plated
 - * Nut: Nylon+GF, Black
 - * Gasket: EPDM, Black
 - △ * Use with waterproof cap or dust cap
Panel Thickness max: 2.5mm
 - △ * Use without waterproof cap or dust cap
Panel Thickness max: 3.5mm

UNIT:mm		TOLERANCE		TITLE		ITEM NO		DRAWN BY		DATE	
.X ±0.25		.XX ±0.1		Mini		AU-04PMMS-LS7001		Vicky		2016-03-30	
.XXX ±0.05		ANGLES ±1°		Panel Lock 4Pin M Conn. M Pin		DWG NO		CHECKED BY		DATE	
				SCALE 2:1		AU-04PMMS-LS7001		Rita		2016-03-30	
				REV. D		CUSTOMER		APPROVED BY		DATE	
				WC-REV. A.2		ALTW		Lisa		2016-03-30	
				Ⓢ: Inspection item							

Amphenol LTW
安費諾亮泰企業股份有限公司