


PDM: Rev:B STATUS: Released Printed: Feb 20, 2008


| _                       | 1   |                                    |                                |                           |                     | 2  |
|-------------------------|---|------------------------------------|--------------------------------|---------------------------|---------------------|--|
|                         | CAT. NO. & DIN  | MENSIONS                           |                                |                           |                     |  |
|                         | NO. OF  | CAT.                               | NO.                            | DIMENSIONS                | (NOTE1)             |  |
| $\bigcirc$              | CONTACTS (n)  | RIGHT ANGLE TYPE                   | STRAIGHT TYPE                  | A ± 0.3                   | B± 0.3              |  |
|                         | 4   | SLW 4 R-5C7LF                      | SLW 4 S-5C7LF                  | 10.2                      | 5.2                 |  |
|                         | 5   | SLW 5 R-5C7LF                      | SLW 5 S-5C7LF                  | 11.2                      | 6.2                 |  |
|                         | 6   | SLW 6 R-5C7LF                      | SLW 6 S-5C7LF                  | 12.2                      | 7.2                 |  |
|                         | 7   | SLW 7 R-5C7LF                      | SLW 7 S-5C7LF                  | 13.2                      | 8.2                 |  |
|                         | 8   | SLW 8 R-5C7LF                      | SLW 8 S-5C7LF                  | 14.2                      | 9.2                 |  |
|                         | 9   | SLW 9 R-5C7LF                      | SLW 9 S-5C7LF                  | 15.2                      | 10.2                |  |
|                         | 10  | SLW 10 R-5C7LF                     | SLW 10S-5C7LF                  | 16.2                      | 11.2                |  |
| A                       | 11  | SLW 11 R-5C7LF                     | SLW 11S-5C7LF                  | 17.2                      | 12.2                | A  |
|                         | 12  | SLW 12 R-5C7LF                     | SLW 12S-5C7LF                  | 18.2                      | 13.2                |  |
|                         | 13  | SLW 13 R-5C7LF                     | SLW 13S-5C7LF                  | 19.2                      | 14.2                | 1  |
|                         | 14  | SLW 14 R-5C7LF                     | SLW 14S-5C7LF                  | 20.2                      | 15.2                |  |
|                         | 15  | SLW 15 R-5C7LF                     | SLW 15S-5C7LF                  | 21.2                      | 16.2                |  |
|                         | 16  | SLW 16 R-5C7LF                     | SLW 16S-5C7LF                  | 22.2                      | 17.2                |  |
|                         | 17  | SLW 17 R-5C7LF                     | SLW 17S-5C7LF                  | 23.2                      | 18.2                |  |
|                         | 18  | SLW 18 R-5C7LF                     | SLW 18S-5C7LF                  | 24.2                      | 19.2                |  |
|                         | 19  | SLW 19 R-5C7LF                     | SLW 19S-5C7LF                  | 25.2                      | 20.2                | e de la companya de l |
| -                       | 20  | SLW 20 R-5C7LF                     | SLW 20S-5C7LF                  | 26.2                      | 21.2                |  |
|                         | 21  | SLW 21 R-5C7LF                     | SLW 21S-5C7LF                  | 27.2                      | 22.2                |  |
| В                       | 22  | SLW 22 R-5C7LF                     | SLW 22S-5C7LF                  | 28.2                      | 23.2                | E  |
| Connect.com             | 23  | SLW 23 R-5C7LF                     | SLW 23S-5C7LF                  | 29.2<br>30.2              | 24.2<br>25.2        |  |
| t.cc                    | 24  | SLW 24 R-5C7LF                     | SLW 24S-5C7LF                  | 31.2                      | 26.2                |  |
| nec                     | 26  | SLW 25 R-5C7LF<br>SLW 26 R-5C7LF   | SLW 25S-5C7LF<br>SLW 26S-5C7LF | 32.2                      | 27.2                |  |
|                         | 27  | SLW 26 R-5C7LF                     | SLW 275-5C7LF                  | 33.2                      | 28.2                |  |
| FC                      | 28  | SLW 27 R-3C7LF                     | SLW 28S-5C7LF                  | 34.2                      | 29.2                |  |
|                         | 29  | SLW 29 R-5C7LF                     | SLW 295-5C7LF                  | 35.2                      | 30.2                |  |
| $\langle \cdot \rangle$ | 30  | SLW 30 R-5C7LF                     | SLW 30S-5C7LF                  | 36.2                      | 31.2                |  |
|                         | CAT. NO.  | SLW (n) R -                        |                                |                           |                     |  |
| C                       | SERIES NAM<br>NO. OF CON<br>R:RIGHT AND<br>S:STRAIGHT | NTACTS — GLE TYPE                  | 1. 5                           | SEE PART DE<br>DIMENSIONS | RAWINGS FOR<br>A,B. | C  |
| ದ                       | VARIATION   |                                    |                                |                           |                     |  |
| ر <del>د</del><br>ج     | LEAD FREE   |                                    |                                |                           |                     |  |
| igh                     | mat'l. code   | surface tolerar<br>ISO 1302 lso 11 | nce projection pro             | duct family               | 58JF/TF             | CODE   |
| Copyright FCI.          | Itr ecn no dr date                                    |                                    | ecified title                  | e CAT N                   | O. TABLE FOR        |  |
| ŏ                       | A J05-0079 H.T '05/2/                                 |                                    | mm                             |                           | CING CONNECT        | OR   |
|                         | B J06-0459 H.T 11/8/                                  | 106 Ungles linear                  | scale X                        | (Cat. No.                 | SLWR/S-5C7          | LF)  |
| _                       |   |                                    |                                | g no                      | sheet 1 of          | f 1 size   |
| ()                      |   | engr ff fater ///                  | 9/06 FCI                       | JSA                       | 96303               | A4   |
| ヽノ                      |   |                                    |                                | e Product                 | Customer Drawi      |  |
| _                       | sheet revision B                                      |                                    |                                |                           |                     | Rev.   |
| D<br>! :                | index   sheet   1  <br>SC-SLW04 JSA96304 96305        | 92759                              | 1                              |                           | 111                 |  |
| ·                       | form: A4  |                                    | 1                              |                           |                     | 2  |

STATUS:Released PDM: Rev:B

Printed: Feb 20, 2008

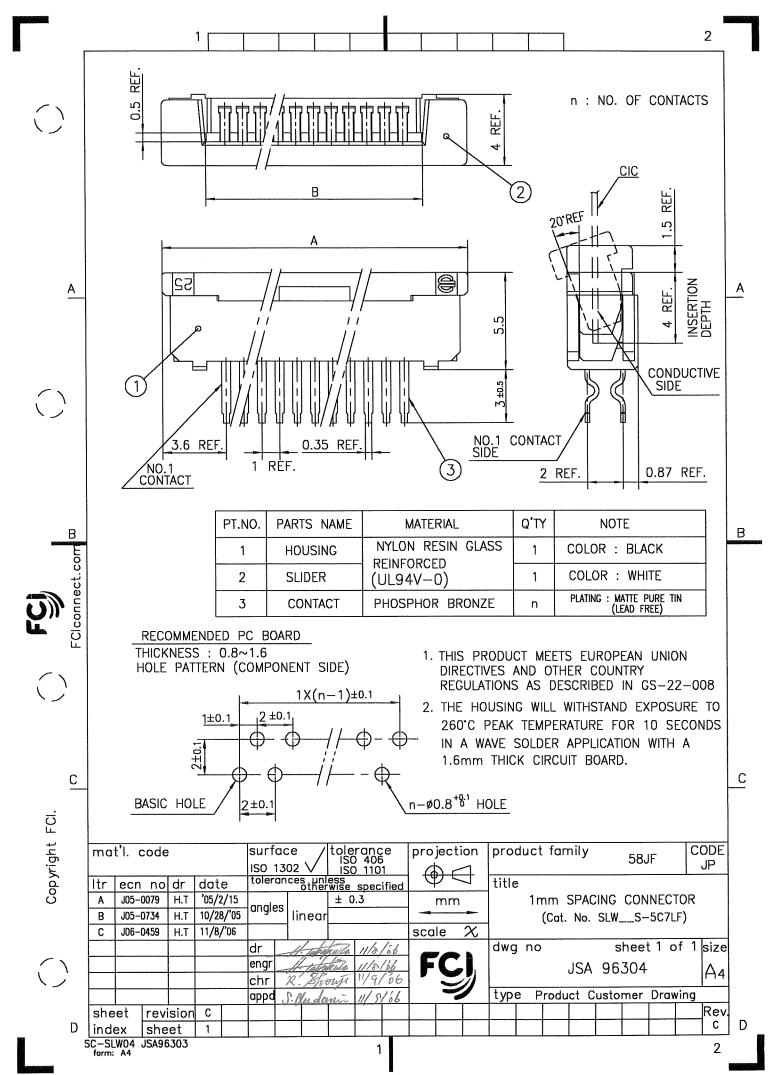


PDM: Rev:C STATUS: Released Printed: Feb 20, 2008

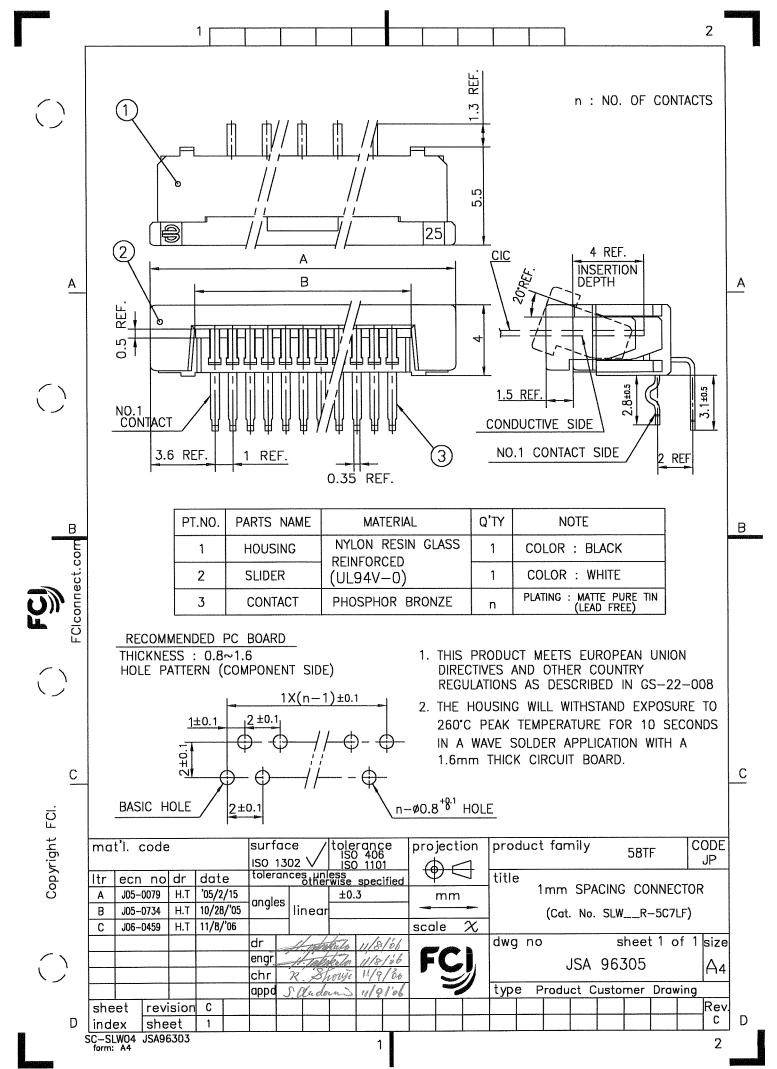

PDM: Rev:C STATUS: Released Printed: Feb 20, 2008



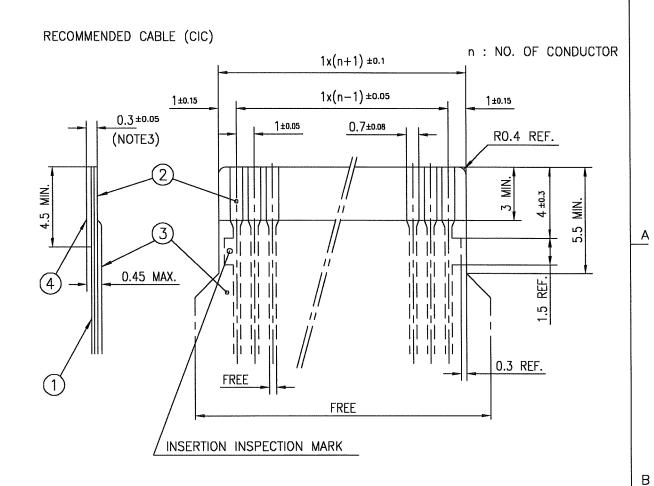

| -        | В              |
|----------|----------------|
| <b>5</b> | FCIconnect.com |

С

Copyright FCI.

 $\bigcirc$ 

<u>A</u>

 $\bigcirc$ 

| PT. NO. | PARTS NAME      | MATERIAL                        | THICKNE | :SS (µm) |  |  |  |
|---------|-----------------|---------------------------------|---------|----------|--|--|--|
| 1       | BASE FILM       | POLYESTER OR EQUAL              | 75      | 25       |  |  |  |
| 2       | CONDUCTOR       | CARBON PASTE OVER SILVER PASTE  | 10 MIN. |          |  |  |  |
| 3       | OVERLAY         | POLYIMIDE OR POLYESTER OR EQUAL |         |          |  |  |  |
| 4       | SUPPORTING TAPE | POLYESTER OR POLYIMIDE OR EQUAL | 188     | 250      |  |  |  |

## NOTES

- 1. NO BURR AT EACH PORTION.
- 2. NO PEELING IN COMMON USE.
- 3. TOTAL THICKNESS LIMIT OF EACH MATERIAL (INCLUDING ADHESIVE AGENT) IS SPECIFIED.

|             | L <sup>7</sup> 1 I    |       |          | lourfor | /                      | tolo        | ranc                 |       | T:      | 1:   |           |                   | 1 1     | £    | - :1 |   |      |       | 10   | DDE  |
|-------------|-----------------------|-------|----------|---------|------------------------|-------------|----------------------|-------|---------|------|-----------|-------------------|---------|------|------|---|------|-------|------|------|
| mat'l. code |                       |       | surface  |         |                        |             | proj<br><del>(</del> |       | on<br>1 | prod | Tari      | шу                | 58JF/TF |      |      |   | JP   |       |      |      |
| ltr         | ecn no                | dr    | date     | toleran | ces unl                | ess<br>Wise | spec                 | ified | 4       |      | 7         | title             |         |      |      |   |      |       |      | 1    |
| AA          | J05-0079              | H.T   | 2/18/'05 | angles  |                        |             | •                    |       | r       | nm   |           | RECOMMENDED CABLE |         |      |      |   | -    |       |      |      |
| AB          | J06-0459              | H.T   | 11/8/'06 | ungles  | linear (Cat. No. SLWR, |             |                      |       |         |      | R/9       | ′S-5 )            |         |      |      |   |      |       |      |      |
|             |                       |       |          |         |                        |             |                      |       | scal    | e :  | $\propto$ |                   |         |      |      |   |      |       |      |      |
|             |                       |       |          | dr      | 4.75/10                | 26          | 11/8                 | 166   | 4       |      | _         | dwg               | no      |      |      | S | heet | t 1 o | of 1 | size |
|             |                       |       |          | engr    | 4-15-16                | Cu iber     | 11/87                | 166   |         | C    | I.        | JSA 92759         |         |      |      |   | ۸.   |       |      |      |
|             |                       |       |          | chr 3   | 7. Shen                | y t         | 11/9/                | 166   |         |      | 7)        |                   |         |      |      |   |      | A4    |      |      |
|             | appd S. Melan 11/9/06 |       |          |         |                        |             | type                 | P     | rodu    | ct C | usto      | mer               | Draw    | /ing |      |   |      |       |      |      |
| she         | et rev                | ision | AB       |         |                        |             |                      |       |         |      |           |                   |         |      |      |   |      |       |      | Rev  |
| ind         | ex she                | et    | 1        |         |                        |             |                      |       |         |      |           |                   |         |      |      |   |      |       |      | AB   |

form: A4

D

D

С

PDM: Rev:AB STATUS:Rele

STATUS: Released Printed: F

## CAT. NO. & DIMENSIONS

| NO. OF<br>CONTACTS | CAT.             | NO.           | DIMENSION | S (NOTE1) |
|--------------------|------------------|---------------|-----------|-----------|
| (n)                | RIGHT ANGLE TYPE | STRAIGHT TYPE | A ± 0.3   | B± 0.3    |
| 4                  | SLW 4 R-5A7LF    | SLW 4 S-5A7LF | 10.2      | 5.2       |
| 5                  | SLW 5 R-5A7LF    | SLW 5 S-5A7LF | 11.2      | 6.2       |
| 6                  | SLW 6 R-5A7LF    | SLW 6 S-5A7LF | 12.2      | 7.2       |
| 7                  | SLW 7 R-5A7LF    | SLW 7 S-5A7LF | 13.2      | 8.2       |
| 8                  | SLW 8 R-5A7LF    | SLW 8 S-5A7LF | 14.2      | 9.2       |
| 9                  | SLW 9 R-5A7LF    | SLW 9 S-5A7LF | 15.2      | 10.2      |
| 10                 | SLW 10R-5A7LF    | SLW 10S-5A7LF | 16.2      | 11.2      |
| 11                 | SLW 11R-5A7LF    | SLW 11S-5A7LF | 17.2      | 12.2      |
| 12                 | SLW 12R-5A7LF    | SLW 12S-5A7LF | 18.2      | 13.2      |
| 13                 | SLW 13R-5A7LF    | SLW 13S-5A7LF | 19.2      | 14.2      |
| 14                 | SLW 14R-5A7LF    | SLW 14S-5A7LF | 20.2      | 15.2      |
| 15                 | SLW 15R-5A7LF    | SLW 15S-5A7LF | 21.2      | 16.2      |
| 16                 | SLW 16R-5A7LF    | SLW 16S-5A7LF | 22.2      | 17.2      |
| 17                 | SLW 17R-5A7LF    | SLW 17S-5A7LF | 23.2      | 18.2      |
| 18                 | SLW 18R-5A7LF    | SLW 18S-5A7LF | 24.2      | 19.2      |
| 19                 | SLW 19R-5A7LF    | SLW 19S-5A7LF | 25.2      | 20.2      |
| 20                 | SLW 20R-5A7LF    | SLW 20S-5A7LF | 26.2      | 21.2      |
| 21                 | SLW 21R-5A7LF    | SLW 21S-5A7LF | 27.2      | 22.2      |
| 22                 | SLW 22R-5A7LF    | SLW 22S-5A7LF | 28.2      | 23.2      |
| 23                 | SLW 23R-5A7LF    | SLW 23S-5A7LF | 29.2      | 24.2      |
| 24                 | SLW 24R-5A7LF    | SLW 24S-5A7LF | 30.2      | 25.2      |
| 25                 | SLW 25R-5A7LF    | SLW 25S-5A7LF | 31.2      | 26.2      |
| 26                 | SLW 26R-5A7LF    | SLW 26S-5A7LF | 32.2      | 27.2      |
| 27                 | SLW 27R-5A7LF    | SLW 27S-5A7LF | 33.2      | 28.2      |
| 28                 | SLW 28R-5A7LF    | SLW 28S-5A7LF | 34.2      | 29.2      |
| 29                 | SLW 29R-5A7LF    | SLW 29S-5A7LF | 35.2      | 30.2      |
| 30                 | SLW 30R-5A7LF    | SLW 30S-5A7LF | 36.2      | 31.2      |

CAT. NO. <u>SLW (n) R -5A7</u> S:STRAIGHT TYPE VARIATION LEAD FREE

NOTE 1. SEE PART DRAWINGS FOR DIMENSIONS A,B.

tolerance ISO 406 ISO 1101 mat'l. code surface projection product family CODE 58JF/TF JP ISO 1302 \ tolerances unless otherwise specified ecn no dr date title CAT NO. TABLE FOR J05-0079 2/18/'05 H.T mm1mm SPACING CONNECTOR angles 11/8/'06 J06-0459 linear (Cat. No. SLW\_\_R/S-5A7LF) scale sheet 1 of 1 size dr dwg no engr JSA 96309 Α4 chr R. Shoup type Product Customer Drawing 119/66 |appd sheet revision В Rev В index sheet SC-SLW04 JSA96310 96311 92759 form: A4

PDM: Rev:B

1

STATUS: Released

Printed: Feb 20, 2008

2

С

В


С

Α

Copyright FCI.



В

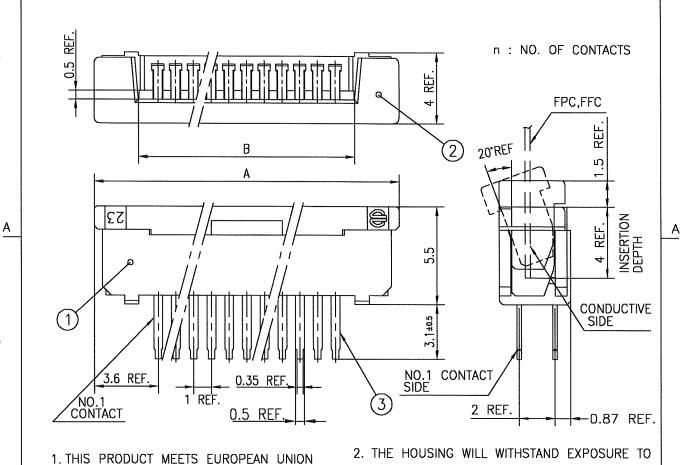

1.6mm THICK CIRCUIT BOARD. PT.NO. PARTS NAME Q'TY **MATERIAL** NOTE NYLON RESIN GLASS HOUSING 1 1 REINFORCED COLOR: BLACK 2 **SLIDER** 1 (UL94V-0)

1±0.1

В


DIRECTIVES AND OTHER COUNTRY

RECOMMENDED PC BOARD


HOLE PATTERN (COMPONENT SIDE)

THICKNESS: 0.8~1.6

REGULATIONS AS DESCRIBED IN GS-22-008

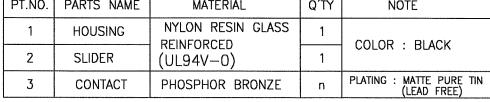

2 ±0.1

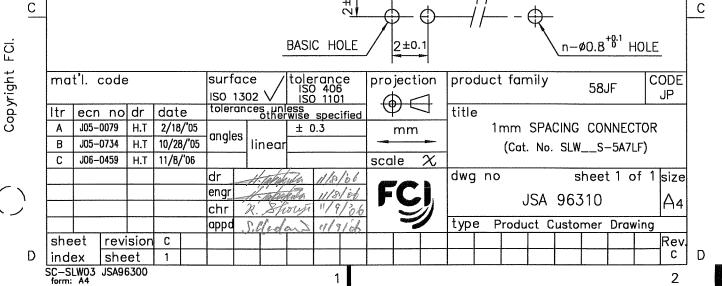

PDM: Rev:C


STATUS: Released

260°C PEAK TEMPERATURE FOR 10 SECONDS

IN A WAVE SOLDER APPLICATION WITH A


 $1X(n-1)\pm0.1$ 

Printed: Feb 20, 2008

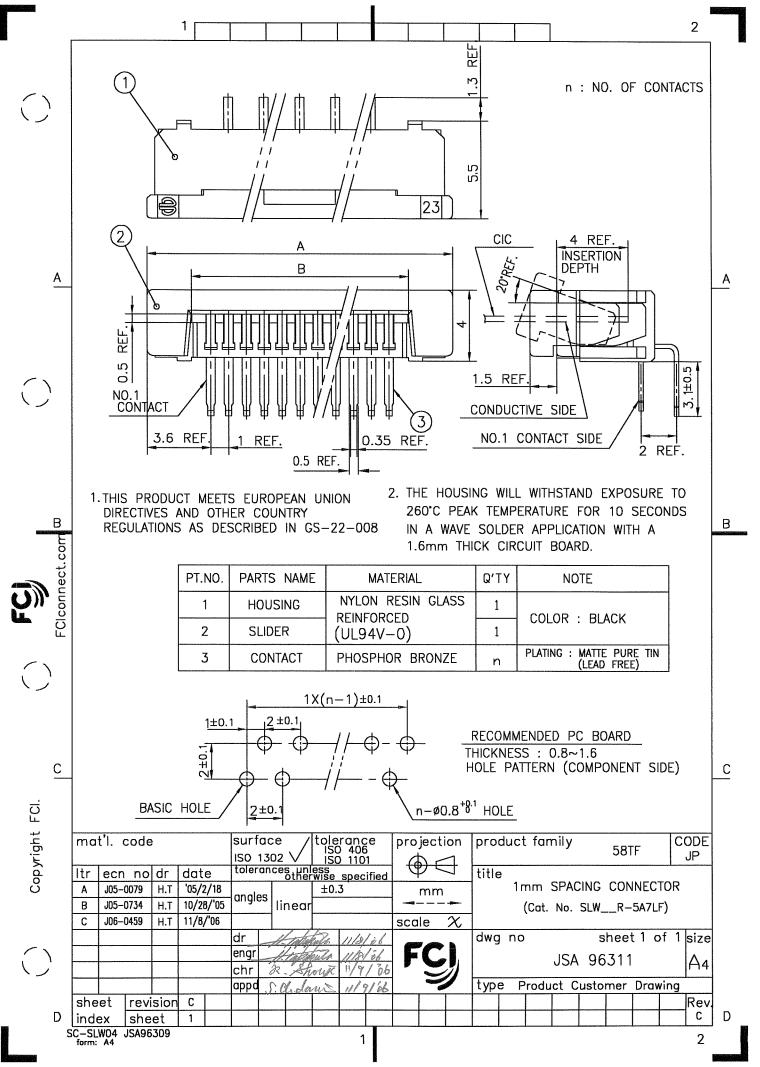

PDM: Rev:C STATUS: Released Printed: Feb 20, 2008



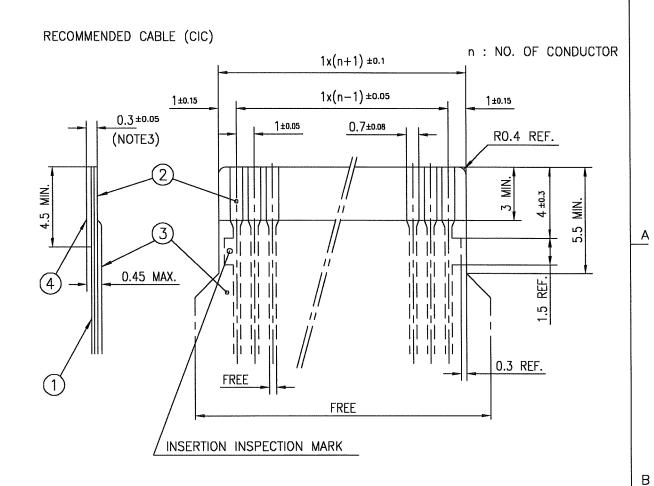

| -        | В              |
|----------|----------------|
| <b>5</b> | FCIconnect.com |

С

Copyright FCI.

 $\bigcirc$ 

<u>A</u>

 $\bigcirc$ 

| PT. NO. | PARTS NAME      | MATERIAL                        | THICKNE | :SS (µm) |  |  |  |
|---------|-----------------|---------------------------------|---------|----------|--|--|--|
| 1       | BASE FILM       | POLYESTER OR EQUAL              | 75      | 25       |  |  |  |
| 2       | CONDUCTOR       | CARBON PASTE OVER SILVER PASTE  | 10 MIN. |          |  |  |  |
| 3       | OVERLAY         | POLYIMIDE OR POLYESTER OR EQUAL |         |          |  |  |  |
| 4       | SUPPORTING TAPE | POLYESTER OR POLYIMIDE OR EQUAL | 188     | 250      |  |  |  |

## NOTES

- 1. NO BURR AT EACH PORTION.
- 2. NO PEELING IN COMMON USE.
- 3. TOTAL THICKNESS LIMIT OF EACH MATERIAL (INCLUDING ADHESIVE AGENT) IS SPECIFIED.

|             | L <sup>7</sup> 1 I    |       |          | lourfor | /                      | tolo        | ranc                 |       | T:      | 1:   |           |                   | 1 1     | £    | - :1 |   |      |       | 10   | DDE  |
|-------------|-----------------------|-------|----------|---------|------------------------|-------------|----------------------|-------|---------|------|-----------|-------------------|---------|------|------|---|------|-------|------|------|
| mat'l. code |                       |       | surface  |         |                        |             | proj<br><del>(</del> |       | on<br>1 | prod | Tari      | шу                | 58JF/TF |      |      |   | JP   |       |      |      |
| ltr         | ecn no                | dr    | date     | toleran | ces unl                | ess<br>Wise | spec                 | ified | 4       |      | 7         | title             |         |      |      |   |      |       |      | 1    |
| AA          | J05-0079              | H.T   | 2/18/'05 | angles  |                        |             | •                    |       | r       | nm   |           | RECOMMENDED CABLE |         |      |      |   | -    |       |      |      |
| AB          | J06-0459              | H.T   | 11/8/'06 | ungles  | linear (Cat. No. SLWR, |             |                      |       |         |      | R/9       | ′S-5 )            |         |      |      |   |      |       |      |      |
|             |                       |       |          |         |                        |             |                      |       | scal    | e :  | $\propto$ |                   |         |      |      |   |      |       |      |      |
|             |                       |       |          | dr      | 4.75/10                | 26          | 11/8                 | 166   | 4       |      | _         | dwg               | no      |      |      | S | heet | t 1 o | of 1 | size |
|             |                       |       |          | engr    | 4-15-56                | Cu iber     | 11/87                | 166   |         | C    | I.        | JSA 92759         |         |      |      |   | ۸.   |       |      |      |
|             |                       |       |          | chr 3   | 7. Shen                | y t         | 11/9/                | 166   |         |      | 7)        |                   |         |      |      |   |      | A4    |      |      |
|             | appd S. Melan 11/9/08 |       |          |         |                        |             | type                 | P     | rodu    | ct C | usto      | mer               | Draw    | /ing |      |   |      |       |      |      |
| she         | et rev                | ision | AB       |         |                        |             |                      |       |         |      |           |                   |         |      |      |   |      |       |      | Rev  |
| ind         | ex she                | et    | 1        |         |                        |             |                      |       |         |      |           |                   |         |      |      |   |      |       |      | AB   |

form: A4

D

D

С

PDM: Rev:AB STATUS:Rele

STATUS: Released Printed: F