


 \forall


NO	ΤE	E S	:	

- <u>3. MATERIALS:</u>

					STAR SYMBOL DENOTES CRITICAL DIMENSION		T INC. AND IS RELEA		PRIETARY IN NATURE, DEVI DENTIAL BASIS FOR IDENT	IFICATION PURPOSES ONLY.
					UNLESS OTHERWISE SPECIFIED	SIZE	WIDTH	MULT	LBS/M	TEMPER
					I. ALL DIMENSIONS IN INCHES -TWO PLACE DECIMALS ±0.01	FINISH			MATERIAL	
					-THREE PLACE DECIMALS ±0.005 -ANGLES +1°	SPEC No.			SPEC No.	
					-ALL DIA. CONCENTRIC WITHIN 0.005 T.I.R. 2. FEATURES ON THE SAME CENTERLINE	FIRST U		SCALE 5 : I	ടന്നിപ	heraft [®]
					MUST BE ALIGNED WITHIN ± 0.002	DATE DRAWN	BY CHKD	APVD		
A	25129	9 - 8 - 0 5	JL	MW	3. REMOVE ALL BURRS	08-Sep-05	JL 9-8-05	MW 9-8-05	SHEET	1 OF 2
REV	ECO NUMBER	DATE	ΒY	APVD		NAME RIGHT	ANGLE SMT DC	IACK	PART No.	REV
	REVIS	IONS		1	DO NOT SCALE DRAWING	SHIELDED	, Ø0.65mm P	N, RoHS	<u> RASM/52</u>	SIRX A
			4		Pro/Engineer CAD File	В				

 \rightarrow

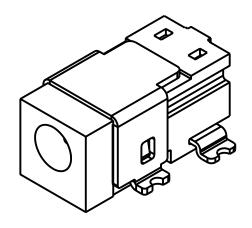

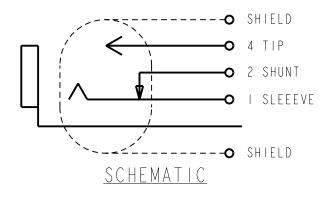

I. THIS PRODUCT IS R⊙HS COMPLIANT

2. ALL DIMENSIONS ARE REFERENCE.

HOUSING: THERMOPLASTIC, BLACK

SPRING CONTACT: COPPER ALLOY, SILVER PLATED

SHUNT TERMINAL: COPPER ALLOY, SILVER PLATED

CENTER PIN: COPPER ALLOY, SILVER PLATED

SHIELD: STEEL, NICKEL PLATED


(CUSTOMER DRAWING)

 \Leftrightarrow

<u>A: CARRIER SIZE</u>

 \rightarrow

- I. DETAIL SIZES REFERENCE: EIA-481
- 2. SPECIFICATION: 24 MM X 12 MM
- 3. COVER TAPE: SPECIFICATION ATTACHED (CONDUCTIVE)

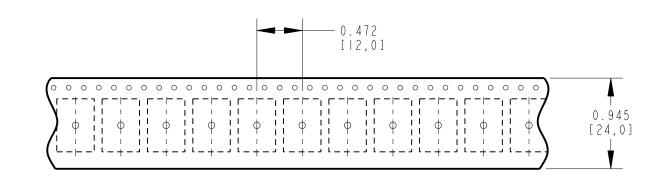


<u>B: REEL SIZE</u>

 \forall

I. QUANTITY: IOOO PCS/REEL

2. MATERIAL: THERMOPLASTIC

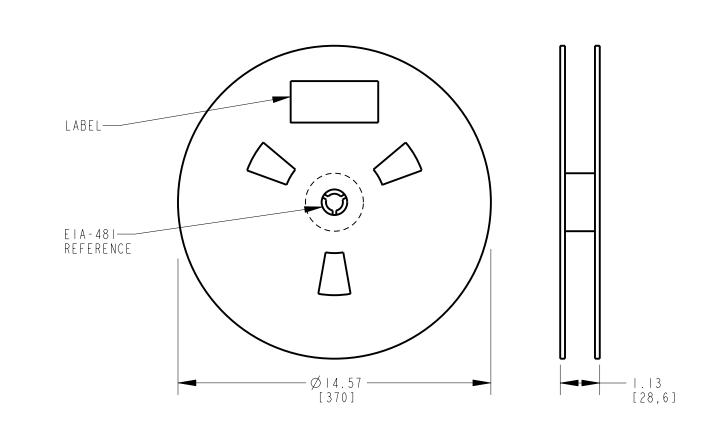

4

SCALE DATE DRAWN	Switchera	ß
08-Sep-05	SHEET 2 OF 2	
DRAWN BY JL	RASM752STRX	rev A

(CUSTOMER DRAWING)

 \triangleleft

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Switchcraft: RASM752STRX