


CBRHDSH1-100

SURFACE MOUNT  
HIGH DENSITY  
1 AMP SILICON  
SCHOTTKY BRIDGE RECTIFIER

HD  
BRIDGE



HD DIP CASE

**DESCRIPTION:**  
The CENTRAL SEMICONDUCTOR CBRHDSH1-100 is a full wave bridge rectifier in a durable epoxy surface mount molded case, designed for low voltage full wave rectification applications. The molding compound used in this device has UL flammability classification 94V-O.

**MARKING CODE: CSH110**

**FEATURES:**

- Low Leakage Current (40nA TYP @  $V_{RRM}$ )
- Low Forward Voltage Drop Schottky Diodes
- High 1.0A Current Rating

MAXIMUM RATINGS: ( $T_A=25^{\circ}\text{C}$ unless otherwise noted)			
	SYMBOL		UNITS
Peak Repetitive Reverse Voltage	$V_{RRM}$	100	V
DC Blocking Voltage	$V_R$	100	V
RMS Reverse Voltage	$V_{R(RMS)}$	71	V
Average Forward Current	$I_O$	1.0	A
Peak Forward Surge Current	$I_{FSM}$	20	A
Power Dissipation	$P_D$	1.2	W
Operating Junction Temperature	$T_J$	-50 to +125	$^{\circ}\text{C}$
Storage Temperature	$T_{stg}$	-55 to +150	$^{\circ}\text{C}$
Thermal Resistance	$\Theta_{JA}$	85	$^{\circ}\text{C/W}$


ELECTRICAL CHARACTERISTICS PER DIODE: ( $T_A=25^{\circ}\text{C}$ unless otherwise noted)					
SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
$I_R$	$V_R=100\text{V}$		0.04	10	$\mu\text{A}$
$I_R$	$V_R=100\text{V}, T_A=50^{\circ}\text{C}$			1.0	mA
$I_R$	$V_R=100\text{V}, T_A=100^{\circ}\text{C}$			20	mA
$BV_R$	$I_R=150\mu\text{A}$	100			V
$V_F$	$I_F=500\text{mA}$		615	700	mV
$V_F$	$I_F=1.0\text{A}$		690	750	mV
$C_J$	$V_R=4.0\text{V}, f=1.0\text{MHz}$		230		pF

**CBRHDSH1-100**

**SURFACE MOUNT**  
**HIGH DENSITY**  
**1 AMP SILICON**  
**SCHOTTKY BRIDGE RECTIFIER**



**HD DIP CASE - MECHANICAL OUTLINE**

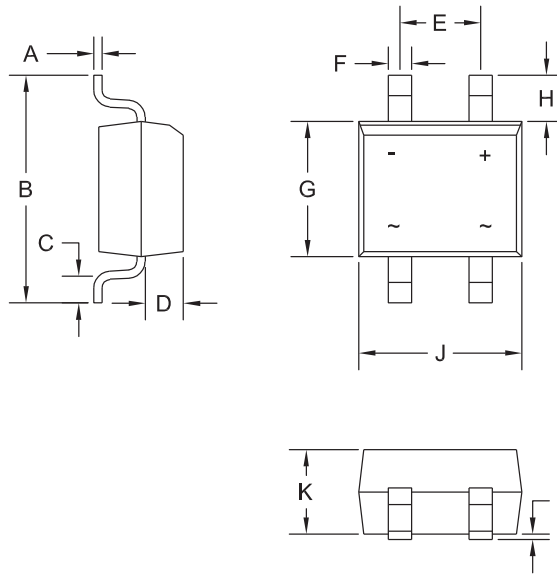

R2

DIMENSIONS				
SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.006	0.014	0.15	0.35
B	-	0.275	-	7.00
C	0.027	0.043	0.70	1.10
D	0.035	0.051	0.90	1.30
E	0.090	0.106	2.30	2.70
F	0.019	0.031	0.50	0.80
G	0.150	0.165	3.80	4.20
H	0.051	0.067	1.30	1.70
J	0.177	0.193	4.50	4.90
K	0.090	0.106	2.30	2.70
L	0.000	0.008	0.00	0.20

HD DIP (REV: R2)

**MARKING CODE: CSH110**


R6 (22-May 2012)

**CBRHDSH1-100**  
**SURFACE MOUNT**  
**HIGH DENSITY**  
**1 AMP SILICON**  
**SCHOTTKY BRIDGE RECTIFIER**




**TYPICAL ELECTRICAL CHARACTERISTICS**

**Typical Leakage Current**

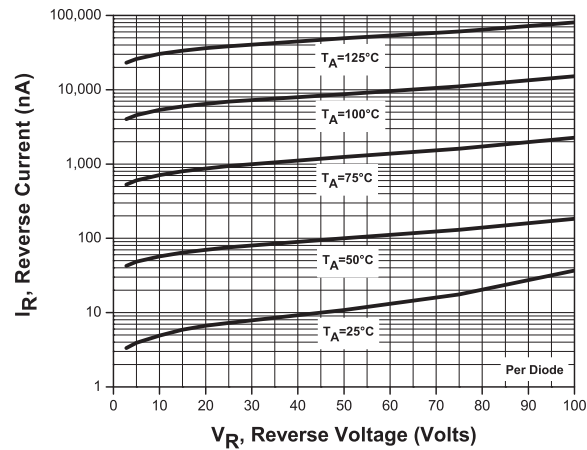

**Typical Forward Voltage**

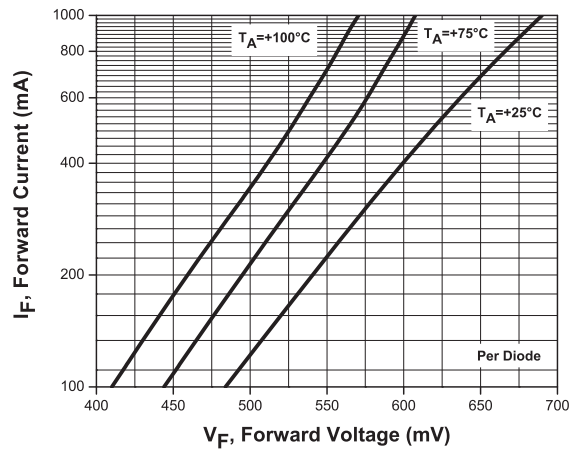

R6 (22-May 2012)

## OUTSTANDING SUPPORT AND SUPERIOR SERVICES



---

### PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

---

### DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2<sup>nd</sup> day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

---

### REQUESTING PRODUCT PLATING

1. If requesting Tin/Lead plated devices, add the suffix " TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
2. If requesting Lead (Pb) Free plated devices, add the suffix " PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

---

### CONTACT US

#### Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.  
145 Adams Avenue  
Hauppauge, NY 11788 USA  
Main Tel: (631) 435-1110  
Main Fax: (631) 435-1824  
Support Team Fax: (631) 435-3388  
[www.centrasemi.com](http://www.centrasemi.com)

**Worldwide Field Representatives:**  
[www.centrasemi.com/wwreps](http://www.centrasemi.com/wwreps)

**Worldwide Distributors:**  
[www.centrasemi.com/wwdistributors](http://www.centrasemi.com/wwdistributors)

---

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: [www.centrasemi.com/terms](http://www.centrasemi.com/terms)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Central Semiconductor:

[CBRHDSH1-100](#) [CBRHDSH1-100 TR13](#)