

SMCJ SERIES SURFACE MOUNT TRANSIENT VOLTAGE SUPPRESSOR


Features:

- Glass Passivated Die Construction
- 1500W Peak Pulse Power Dissipation
- 5.0V- 170V Standoff Voltage
- Uni- and Bi-Directional Versions Available
- Excellent Clamping Capability
- Fast Response Time
- Plastic Case Material has UL Flammability Classification Rating 94V-O
- This is a Pb – Free Device
- All SMC Parts are Traceable to the Wafer Lot
- Additional testing can be offered upon request

Mechanical Data:

- Case: JEDEC DO-214AB Low Profile Molded Plastic
- Terminals: Solder Plated , Solderable per MIL-STD 750, Method 2026
- Polarity: Cathode Band or Cathode Notch
- Weight:0.21 grams(approx.)

Mechanical Dimensions: In Inches (mm)

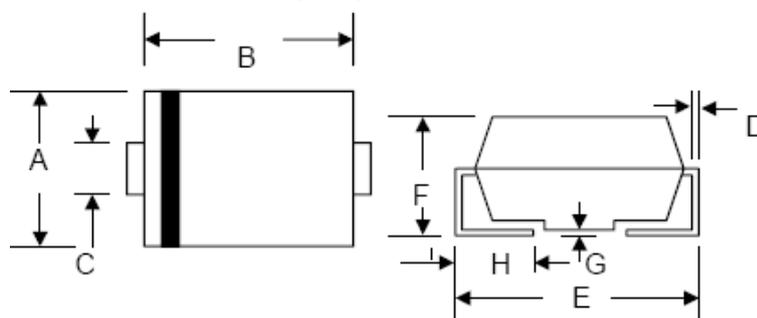

SMC/DO-214AB				
Dim.	Min.	Max.	Min.	Max.
A	5.59	6.22	0.220	0.245
B	6.60	7.11	0.260	0.280
C	2.75	3.25	0.108	0.128
D	0.152	0.305	0.006	0.012
E	7.75	8.25	0.305	0.325
F	2.00	2.95	0.079	0.116
G	0.051	0.203	0.002	0.008
H	0.76	1.60	0.030	0.063
	In mm		In inch	

SMC

Technical Data
Data Sheet N0002, Rev. B

Green Products

Marking Diagram:



SMCJ5.0



SMCJ5.0C

Where XXXXX is YYWWL

GDD/BDD = Part Name
YY = Year
WW = Week
L = Lot Number

Cautions: Molding resin
Epoxy resin UL:94V-0

Ordering Information

Device	Package	Shipping
SMCJ SERIES	SMC (Pb-Free)	3000pcs / reel

For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specification.


Maximum Ratings and Electrical Characteristics @ $T_A=25^\circ\text{C}$ unless otherwise specified

Parameter	Symbol	Value	Unit
Peak Pulse Power Dissipation at $T_A=25^\circ\text{C}$ by 10x1000 μs Waveform (Fig.1)(Note 1), (Note 2)	P_{PPM}	1500	W
Peak Pulse Current on 10x1000 μs Waveform (Note 1) (Fig.3)	I_{PPM}	See Table 1	A
Peak Forward Surge Current, 8.3ms Single Half Sine Wave (Note 2),(Note 3)	I_{FSM}	200	A
Operating Junction and Storage Temperature Range	T_J, T_{STG}	-55 to +150	$^\circ\text{C}$


- Notes:** 1. Non-repetitive current pulse , per Fig. 3 and derated above $T_A = 25^\circ\text{C}$ per Fig. 2.
2. Mounted on 8.0mm² copper pads to each terminal.
3. Measured on 8.3ms single half sine wave or equivalent square wave, duty cycle=4pulses per minute maximum.

Technical Data
Data Sheet N0002, Rev. B

Green Products

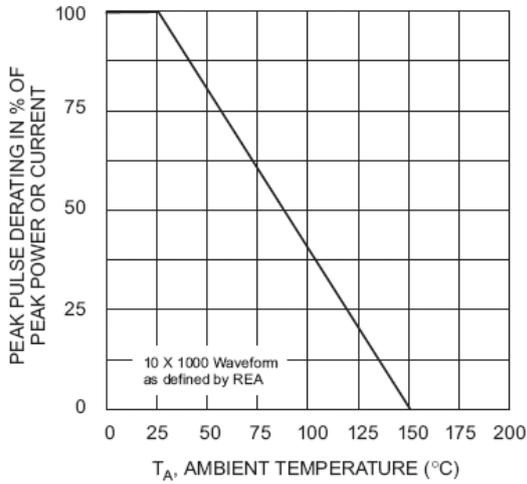

T_A , AMBIENT TEMPERATURE ($^{\circ}C$)
Fig. 1 Pulse Derating Curve

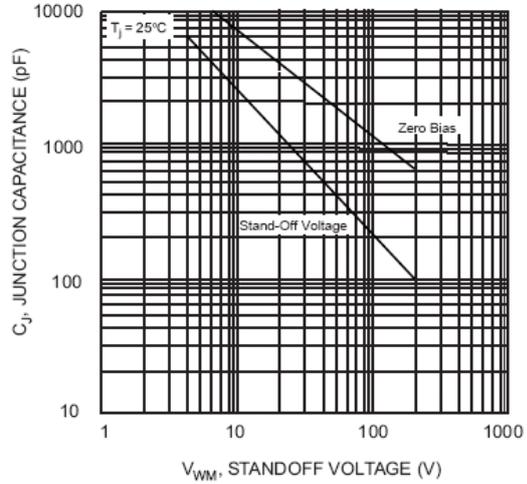

V_{WM} , STANDOFF VOLTAGE (V)
Fig. 2 Typical Junction Capacitance

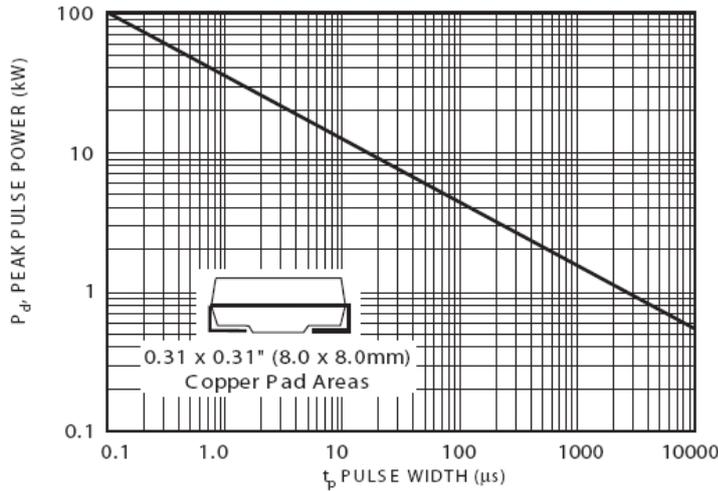


Fig. 3 Pulse Rating Curve

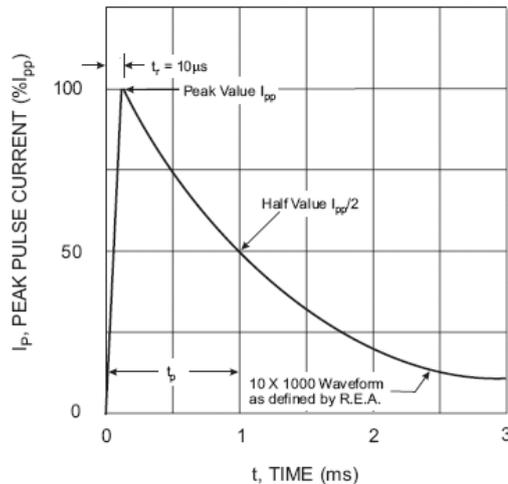


Fig. 4 Pulse Waveform

- China - Germany - Korea - Singapore - United States •
- <http://www.smc-diodes.com> - sales@smc-diodes.com •



SMCJ SERIES
1500W SURFACE MOUNT TRANSIENT VOLTAGE SUPPRESSOR

Technical Data
Data Sheet N0002, Rev. B

Green Products

UNI-DIRECTIONAL 1500 WATT SURFACE MOUNT TVS

UNI-DIRECTIONAL PART NO.	DEVICE MARKING CODE	REVERSE STAND-OFF VOLTAGE VRWM (V)	BREAKDOWN VOLTAGE VBR (V) MIN. @IT	BREAKDOWN VOLTAGE VBR (V) MAX. @IT	TEST CURRENT IT (mA)	MAXIMUM CLAMPING VOLTAGE @Ipp Vc (V)	PEAK PULSE CURRENT Ipp (A)	REVERSE LEAKAGE @VRWM IR (uA)
SMCJ5.0	GDD	5.00	6.40	7.82	10	9.6	156.2	1000
SMCJ5.0A	GDE	5.00	6.40	7.07	10	9.2	163.0	1000
SMCJ6.0	GDF	6.00	6.67	8.15	10	11.4	131.6	1000
SMCJ6.0A	GDG	6.00	6.67	7.37	10	10.3	145.6	1000
SMCJ6.5	GDH	6.50	7.22	8.82	10	12.3	122.0	500
SMCJ6.5A	GDK	6.50	7.22	7.98	10	11.2	133.9	500
SMCJ7.0	GDL	7.00	7.78	9.51	10	13.3	112.8	200
SMCJ7.0A	GDM	7.00	7.78	8.60	10	12.0	125.0	200
SMCJ7.5	GDN	7.50	8.33	10.18	1	14.3	104.9	100
SMCJ7.5A	GDP	7.50	8.33	9.21	1	12.9	116.3	100
SMCJ8.0	GDQ	8.00	8.99	10.99	1	15.0	100.0	50
SMCJ8.0A	GDR	8.00	8.99	9.94	1	13.6	110.3	50
SMCJ8.5	GDS	8.50	9.44	11.54	1	15.9	94.3	25
SMCJ8.5A	GDT	8.50	9.44	10.43	1	14.4	104.2	25
SMCJ9.0	GDU	9.00	10.00	12.22	1	16.9	88.7	10
SMCJ9.0A	GDV	9.00	10.00	11.05	1	15.4	97.4	10
SMCJ10	GDW	10.00	11.10	13.57	1	18.8	79.8	5
SMCJ10A	GDX	10.00	11.10	12.27	1	17.0	88.2	5
SMCJ11	GDY	11.00	12.20	14.91	1	20.1	74.6	5
SMCJ11A	GDZ	11.00	12.20	13.48	1	18.2	82.4	5
SMCJ12	GED	12.00	13.30	16.26	1	22.0	68.2	5
SMCJ12A	GEE	12.00	13.30	14.70	1	19.9	75.3	5
SMCJ13	GEF	13.00	14.40	17.60	1	23.8	63.0	5
SMCJ13A	GEG	13.00	14.40	15.92	1	21.5	69.7	5
SMCJ14	GEH	14.00	15.60	19.07	1	25.8	58.1	5
SMCJ14A	GEK	14.00	15.60	17.24	1	23.2	64.7	5
SMCJ15	GEL	15.00	16.70	20.41	1	26.9	55.8	5
SMCJ15A	GEM	15.00	16.70	18.46	1	24.4	61.5	5
SMCJ16	GEN	16.00	17.80	21.76	1	28.8	52.1	5
SMCJ16A	GEP	16.00	17.80	19.67	1	26.0	57.7	5
SMCJ17	GEQ	17.00	18.90	23.10	1	30.5	49.2	5
SMCJ17A	GER	17.00	18.90	20.89	1	27.6	53.3	5
SMCJ18	GES	18.00	20.00	24.44	1	32.2	46.6	5
SMCJ18A	GET	18.00	20.00	22.11	1	29.2	51.4	5
SMCJ20	GEU	20.00	22.20	27.13	1	35.8	41.9	5
SMCJ20A	GEV	20.00	22.20	24.54	1	32.4	46.3	5
SMCJ22	GEW	22.00	24.40	29.82	1	39.4	38.1	5
SMCJ22A	GEX	22.00	24.40	26.97	1	35.5	42.2	5
SMCJ24	GEY	24.00	26.70	32.63	1	43.0	34.9	5
SMCJ24A	GEZ	24.00	26.70	29.51	1	38.9	38.6	5
SMCJ26	GFD	26.00	28.90	35.32	1	46.6	32.2	5
SMCJ26A	GFE	26.00	28.90	31.94	1	42.1	35.6	5
SMCJ28	GFF	28.00	31.10	38.01	1	50.0	30.0	5
SMCJ28A	GFG	28.00	31.10	34.37	1	45.4	33.0	5
SMCJ30	GFH	30.00	33.30	40.70	1	53.5	28.0	5
SMCJ30A	GFK	30.00	33.30	36.81	1	48.4	31.0	5
SMCJ33	GFL	33.00	36.70	44.86	1	59.0	25.2	5
SMCJ33A	GFM	33.00	36.70	40.56	1	53.3	28.1	5
SMCJ36	GFN	36.00	40.00	48.89	1	64.3	23.3	5
SMCJ36A	GFP	36.00	40.00	44.21	1	58.1	25.8	5
SMCJ40	GFO	40.00	44.40	54.27	1	71.4	21.0	5
SMCJ40A	GFR	40.00	44.40	49.07	1	64.5	23.2	5
SMCJ43	GFS	43.00	47.80	58.42	1	76.6	19.6	5
SMCJ43A	GFT	43.00	47.80	52.83	1	69.4	21.6	5
SMCJ45	GFU	45.00	50.00	61.11	1	80.3	18.7	5
SMCJ45A	GFV	45.00	50.00	55.26	1	72.7	20.6	5
SMCJ48	GFW	48.00	53.30	65.14	1	85.5	17.5	5
SMCJ48A	GFX	48.00	53.30	58.91	1	77.4	19.4	5
SMCJ51	GFY	51.00	56.70	69.30	1	91.1	18.5	5
SMCJ51A	GFZ	51.00	56.70	62.67	1	82.4	18.2	5
SMCJ54	GGD	54.00	60.00	73.33	1	96.3	15.6	5
SMCJ54A	GGE	54.00	60.00	66.32	1	87.1	17.2	5
SMCJ58	GGF	58.00	64.40	78.71	1	103.0	14.6	5
SMCJ58A	GGG	58.00	64.40	71.18	1	93.6	16.0	5
SMCJ60	GGH	60.00	66.70	81.52	1	107.0	14.0	5
SMCJ60A	G GK	60.00	66.70	73.72	1	96.8	15.5	5
SMCJ64	GGL	64.00	71.10	86.90	1	114.0	13.2	5
SMCJ64A	GGM	64.00	71.10	78.58	1	103.0	14.6	5
SMCJ70	GGN	70.00	77.80	95.09	1	125.0	12.0	5
SMCJ70A	G GP	70.00	77.80	85.99	1	113.0	13.3	5
SMCJ75	GGQ	75.00	83.30	101.81	1	134.0	11.2	5
SMCJ75A	GGR	75.00	83.30	92.07	1	121.0	12.4	5
SMCJ78	GGS	78.00	86.70	105.97	1	139.0	10.8	5
SMCJ78A	G GT	78.00	86.70	95.83	1	126.0	11.4	5
SMCJ85	GGU	85.00	94.40	115.38	1	151.0	9.9	5
SMCJ85A	G GV	85.00	94.40	104.34	1	137.0	10.4	5
SMCJ90	GGW	90.00	100.00	122.22	1	160.0	9.4	5
SMCJ90A	G GX	90.00	100.00	110.53	1	146.0	10.3	5
SMCJ100	GGY	100.00	111.00	135.67	1	179.0	8.4	5
SMCJ100A	G SZ	100.00	111.00	122.68	1	162.0	9.3	5
SMCJ110	GHD	110.00	122.00	149.11	1	196.0	7.7	5
SMCJ110A	G HE	110.00	122.00	134.84	1	177.0	8.4	5
SMCJ120	G HF	120.00	133.00	162.56	1	214.0	7.0	5
SMCJ120A	G HG	120.00	133.00	147.00	1	193.0	7.9	5
SMCJ130	G HH	130.00	144.00	176.00	1	231.0	6.5	5
SMCJ130A	G HK	130.00	144.00	159.16	1	209.0	7.2	5
SMCJ150	G HL	150.00	167.00	204.11	1	269.0	5.6	5
SMCJ150A	G HM	150.00	167.00	184.58	1	243.0	6.2	5
SMCJ160	G HN	160.00	178.00	217.56	1	287.0	5.2	5
SMCJ160A	G HP	160.00	178.00	196.74	1	259.0	5.8	5
SMCJ170	G HQ	170.00	189.00	231.00	1	304.0	4.9	5
SMCJ170A	G HR	170.00	189.00	208.89	1	275.0	5.5	5

"C" Suffix Designates Bi-directional Devices

"A" Suffix Designates 5% Tolerance Devices

No Suffix Designates 10% Tolerance Devices

- China - Germany - Korea - Singapore - United States •
- <http://www.smc-diodes.com> - sales@smc-diodes.com •



**Technical Data
Data Sheet N0002, Rev. B**

Green Products

BI-DIRECTIONAL 1500 WATT SURFACE MOUNT TVS

BI-DIRECTIONAL PART NO.	DEVICE MARKING CODE	REVERSE STAND-OFF VOLTAGE VRWM (V)	BREAKDOWN VOLTAGE VBR (V) MIN. @IT	BREAKDOWN VOLTAGE VBR (V) MAX. @IT	TEST CURRENT IT (mA)	MAXIMUM CLAMPING VOLTAGE @Ipp Vc (V)	PEAK PULSE CURRENT Ipp (A)	REVERSE LEAKAGE @VRWM IR (uA)
SMCJ50C	BDD	5.00	6.40	7.82	10	9.6	156.2	2000
SMCJ50CA	BDE	5.00	6.40	7.07	10	9.2	163.0	2000
SMCJ80C	BDF	6.00	6.67	8.15	10	11.4	131.6	2000
SMCJ80CA	BDG	6.00	6.67	7.37	10	10.3	145.6	2000
SMCJ85C	BDH	6.50	7.22	8.82	10	12.3	122.0	1000
SMCJ85CA	BDK	6.50	7.22	7.98	10	11.2	133.9	1000
SMCJ70C	BDL	7.00	7.78	9.51	10	13.3	112.6	400
SMCJ70CA	BDM	7.00	7.78	8.80	10	12.0	125.0	400
SMCJ75C	BDN	7.50	8.33	10.18	1	14.3	104.9	200
SMCJ75CA	BDP	7.50	8.33	9.21	1	12.9	118.3	200
SMCJ80C	BDQ	8.00	8.99	10.99	1	15.0	100.0	100
SMCJ80CA	BDR	8.00	8.99	9.94	1	13.8	110.3	100
SMCJ85C	BDS	8.50	9.44	11.54	1	15.9	94.3	60
SMCJ85CA	BDT	8.50	9.44	10.43	1	14.4	104.2	60
SMCJ90C	BDU	9.00	10.00	12.22	1	16.9	88.7	20
SMCJ90CA	BDV	9.00	10.00	11.05	1	15.4	97.4	20
SMCJ100C	BDW	10.00	11.10	13.57	1	18.8	79.8	5
SMCJ100CA	BDX	10.00	11.10	12.27	1	17.0	88.2	5
SMCJ110C	BDY	11.00	12.20	14.91	1	20.1	74.6	5
SMCJ110CA	BDZ	11.00	12.20	13.48	1	18.2	82.4	5
SMCJ120C	BED	12.00	13.30	16.26	1	22.0	68.2	5
SMCJ120CA	BEE	12.00	13.30	14.70	1	19.9	75.3	5
SMCJ130C	BEF	13.00	14.40	17.60	1	23.8	63.0	5
SMCJ130CA	BEG	13.00	14.40	15.92	1	21.5	69.7	5
SMCJ140C	BEH	14.00	15.60	19.07	1	26.8	58.1	5
SMCJ140CA	BEK	14.00	15.60	17.24	1	23.2	64.7	5
SMCJ150C	BEL	15.00	16.70	20.41	1	26.9	55.8	5
SMCJ150CA	BEM	15.00	16.70	18.46	1	24.4	61.5	5
SMCJ160C	BEN	16.00	17.80	21.76	1	28.8	52.1	5
SMCJ160CA	BEP	16.00	17.80	19.67	1	26.0	57.7	5
SMCJ170C	BEQ	17.00	18.90	23.10	1	30.5	49.2	5
SMCJ170CA	BER	17.00	18.90	20.89	1	27.6	53.3	5
SMCJ180C	BES	18.00	20.00	24.44	1	32.2	46.6	5
SMCJ180CA	BET	18.00	20.00	22.11	1	29.2	51.4	5
SMCJ200C	BEU	20.00	22.20	27.13	1	35.9	41.9	5
SMCJ200CA	BEV	20.00	22.20	24.54	1	32.4	46.3	5
SMCJ220C	BEW	22.00	24.40	28.62	1	39.4	38.1	5
SMCJ220CA	BEX	22.00	24.40	26.97	1	35.5	42.2	5
SMCJ240C	BEY	24.00	26.70	32.63	1	43.0	34.9	5
SMCJ240CA	BEZ	24.00	26.70	29.51	1	38.9	38.6	5
SMCJ280C	BFD	28.00	28.60	38.32	1	46.6	32.2	5
SMCJ280CA	BFE	28.00	28.60	31.94	1	42.1	35.6	5
SMCJ280C	BFF	28.00	31.10	38.01	1	50.0	30.0	5
SMCJ280CA	BFG	28.00	31.10	34.37	1	45.4	33.0	5
SMCJ300C	BFH	30.00	33.30	40.70	1	53.5	28.0	5
SMCJ300CA	BFK	30.00	33.30	36.81	1	48.4	31.0	5
SMCJ330C	BFL	33.00	36.70	44.86	1	59.0	25.2	5
SMCJ330CA	BFM	33.00	36.70	40.56	1	53.3	28.1	5
SMCJ360C	BFN	36.00	40.00	48.89	1	64.3	23.3	5
SMCJ360CA	BFP	36.00	40.00	44.21	1	58.1	25.8	5
SMCJ400C	BFQ	40.00	44.40	54.27	1	71.4	21.0	5
SMCJ400CA	BFR	40.00	44.40	49.07	1	64.5	23.2	5
SMCJ430C	BFS	43.00	47.80	58.42	1	76.6	19.6	5
SMCJ430CA	BFT	43.00	47.80	52.83	1	66.4	21.6	5
SMCJ450C	BFU	45.00	50.00	61.11	1	80.3	18.7	5
SMCJ450CA	BFV	45.00	50.00	55.26	1	72.7	20.6	5
SMCJ480C	BFW	48.00	53.30	65.14	1	85.5	17.5	5
SMCJ480CA	BFX	48.00	53.30	58.91	1	77.4	19.4	5
SMCJ510C	BFY	51.00	56.70	69.30	1	91.1	16.5	5
SMCJ510CA	BFZ	51.00	56.70	62.67	1	82.4	18.2	5
SMCJ540C	BGD	54.00	60.00	73.33	1	96.3	15.6	5
SMCJ540CA	BGE	54.00	60.00	66.32	1	87.1	17.2	5
SMCJ560C	BGF	58.00	64.40	78.71	1	103.0	14.6	5
SMCJ560CA	BGG	58.00	64.40	71.18	1	93.8	16.0	5
SMCJ600C	BGH	60.00	66.70	81.52	1	107.0	14.0	5
SMCJ600CA	BGI	60.00	66.70	73.72	1	95.9	15.5	5
SMCJ640C	BGL	64.00	71.10	86.90	1	114.0	13.2	5
SMCJ640CA	BGM	64.00	71.10	78.58	1	103.0	14.8	5
SMCJ700C	BGN	70.00	77.80	96.09	1	126.0	12.0	5
SMCJ700CA	BGP	70.00	77.80	86.99	1	113.0	13.3	5
SMCJ750C	BGQ	75.00	83.30	101.81	1	134.0	11.2	5
SMCJ750CA	BGR	75.00	83.30	92.07	1	121.0	12.4	5
SMCJ780C	BGS	78.00	86.70	105.97	1	139.0	10.8	5
SMCJ780CA	BGT	78.00	86.70	95.83	1	126.0	11.4	5
SMCJ850C	BGU	85.00	94.40	115.38	1	151.0	9.9	5
SMCJ850CA	BGV	85.00	94.40	104.34	1	137.0	10.4	5
SMCJ900C	BGW	90.00	100.00	122.22	1	160.0	9.4	5
SMCJ900CA	BGX	90.00	100.00	110.53	1	146.0	10.3	5
SMCJ1000C	BGY	100.00	111.00	135.67	1	179.0	8.4	5
SMCJ1000CA	BGZ	100.00	111.00	122.88	1	162.0	9.3	5
SMCJ1100C	BHD	110.00	122.00	149.11	1	196.0	7.7	5
SMCJ1100CA	BHE	110.00	122.00	134.84	1	177.0	8.4	5
SMCJ1200C	BHF	120.00	133.00	162.66	1	214.0	7.0	5
SMCJ1200CA	BHG	120.00	133.00	147.00	1	193.0	7.9	5
SMCJ1300C	BHH	130.00	144.00	178.00	1	231.0	6.5	5
SMCJ1300CA	BHK	130.00	144.00	159.16	1	209.0	7.2	5
SMCJ1600C	BHL	160.00	167.00	204.11	1	269.0	5.6	5
SMCJ1600CA	BHM	160.00	167.00	184.88	1	243.0	6.2	5
SMCJ1800C	BHN	180.00	178.00	217.66	1	287.0	5.2	5
SMCJ1800CA	BHP	180.00	178.00	198.74	1	259.0	5.8	5
SMCJ1700C	BHQ	170.00	189.00	231.00	1	304.0	4.9	5
SMCJ1700CA	BHR	170.00	189.00	208.89	1	275.0	5.5	5

"C" Suffix Designates Bi-directional Devices
 "A" Suffix Designates 5% Tolerance Devices
 No Suffix Designates 10% Tolerance Devices

- China - Germany - Korea - Singapore - United States •
- <http://www.smc-diodes.com> - sales@smc-diodes.com •



DISCLAIMER:

1- The information given herein, including the specifications and dimensions, is subject to change without prior notice to improve product characteristics. Before ordering, purchasers are advised to contact the SMC - Sangdest Microelectronics (Nanjing) Co., Ltd sales department for the latest version of the datasheet(s).

2- In cases where extremely high reliability is required (such as use in nuclear power control, aerospace and aviation, traffic equipment, medical equipment, and safety equipment), safety should be ensured by using semiconductor devices that feature assured safety or by means of users' fail-safe precautions or other arrangement.

3- In no event shall SMC - Sangdest Microelectronics (Nanjing) Co., Ltd be liable for any damages that may result from an accident or any other cause during operation of the user's units according to the datasheet(s). SMC - Sangdest Microelectronics (Nanjing) Co., Ltd assumes no responsibility for any intellectual property claims or any other problems that may result from applications of information, products or circuits described in the datasheets.

4- In no event shall SMC - Sangdest Microelectronics (Nanjing) Co., Ltd be liable for any failure in a semiconductor device or any secondary damage resulting from use at a value exceeding the absolute maximum rating.

5- No license is granted by the datasheet(s) under any patents or other rights of any third party or SMC - Sangdest Microelectronics (Nanjing) Co., Ltd.

6- The datasheet(s) may not be reproduced or duplicated, in any form, in whole or part, without the expressed written permission of SMC - Sangdest Microelectronics (Nanjing) Co., Ltd.

7- The products (technologies) described in the datasheet(s) are not to be provided to any party whose purpose in their application will hinder maintenance of international peace and safety nor are they to be applied to that purpose by their direct purchasers or any third party. When exporting these products (technologies), the necessary procedures are to be taken in accordance with related laws and regulations..