THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

NOTES:

1. SEE SHEET 2 FOR PRODUCT DESCRIPTIONS AND

- 1. SEE SHEET 2 FOR PRODUCT DESCRIPTIONS AND TECHNICAL SPECIFICATIONS.
- 2. SEE CURRENT CATALOG FOR PIGTAIL LENGTHS AND PACKAGE QUANTITY.
- 3. FOR LENGTHS OTHER THAN THOSE LISTED IN CATALOG, CONTACT YOUR PANDUIT SALES PERSON.
- 4. TESTED TO EIA/TIA 568-B.3.
- 5. ALL MATERIALS AND COMPONENTS USED MEET THE MATERIAL RESTRICTIONS OF ROHS, (EUROPEAN DIRECTIVE 2002/95/EC ON THE RESTRICTION OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE ROHS TECHNICAL ADAPTATION COMMITTEE.

JACKETED MULTI FIBER RISER RATED 900um TIGHT BUFFERED FIBER OPTIC DISTRIBUTION CABLE

02779-27

ECN - R

SUP

CUST

06-04-07

DATE

MC

BY CHK


SC CONNECTORS

(12 SHOWN)

RELEASED TO PRODUCTION

DESCRIPTION

PRETERMINATED SC FIBER OPTIC PIGTAIL
CUSTOMER DRAWING

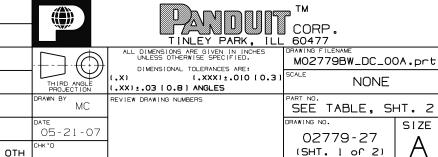

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PRETERMINATED SC FIBER OPTIC PIGTAIL									
PANDU I T		CABLE	SC CONNECTOR						
PART NO.	RATING	FIBER TYPE	COUNT	COLOR	MAX. IL	RL	COLOR		
F66D3-NM*Y		62.5/125∪m OM1	6	ORANGE	0.30dB	20dB	ELECTRIC IVORY		
F612D3-NM*Y	RISER (OFNR)	62.5/125∪m OM1	12	ORANGE	0.30dB	20dB	ELECTRIC IVORY		
F96D3-NM*Y		9/125um OS1	6	YELLOW	0.75dB	55dB	BLUE		
F912D3-NM*Y		9/125um 051	12	YELLOW	0.75dB	55dB	BLUE		

^{* -} DENOTES PIGTAIL LENGTH, WHERE M = METERS AND F = FEET

										PRET	PRETERMINATED SC FIBER OPTIC PIGTAIL CUSTOMER DRAWING				
										THEOD ANGLE	TINLEY PARK, ILL ALL DIMENSIONS ARE GIVEN IN INCHES UNLESS OTHERWISE SPECIFIED. DIMENSIONAL TOLERANCES ARE: [.XX	MO2779BW_DC_00A.prt			
R	06-04-07	MC		RELEASED TO PRODUCTION	02779-27						TETTER SWATTE TOURSE.	SEE TABLE DRAWING NO. SIZE 02779-27			
REV	DATE	BY	СНК	DESCRIPTION	ECN -	R	CUST	SUP	отн	CHK 'D		(SHT. 2 of 2)			

T