

LOC	DIST	REVISIONS				
P	LTR	DESCRIPTION		DATE	DWN	APVD
	D	ECR-07-023453		03/10/07	AM	FWK

NOTES:



- 1 PACK IN ACCORDANCE WITH AMP SPEC 107-3275
- 2 100 TRAY PACK IN ACCORDANCE WITH AMP SPEC 107-3275
- 3 Au PLATING
- 4 Ni PLATING
- 5 THIS ITEM MUST BE WHITE

- 6 HAND TOOL : 9-1478240-0
- 7 DIE SET : 9-1478245-0


- 8 ELECTRICAL CHARACTERISTICS
- FREQUENCY RANGE: DC - 2 GHz
- NOMINAL IMPEDANCE: 75 Ohm
- INSULATION RESISTANCE: 5000 MOhm
- WORKING VOLTAGE: 500 Volts RMS at Sea Level
- DIELECTRIC WITHSTAND VOLTAGE: 1500 Volts RMS Max
- CONTACT RESISTANCE:
- CENTRE CONTACT: 1.50 mOhm Max
- OUTER CONTACT: 0.20 mOhm Max
- VSWR @ 2GHz: 1.20:1 Max
- INSERTION LOSS dB @ x 2 GHz: 0.20 Max

- 9 MECHANICAL CHARACTERISTICS
- COUPLING RETENTION FORCE: N/A
- CABLE RETENTION FORCE: 85N Min
- MOUNT NUT RECOMMENDED TORQUE: 4N
- DURABILITY: 500 Cycles Min

- 10 ENVIRONMENTAL CHARACTERISTICS
- OPERATING TEMPERATURE: -65 to +165 DegC

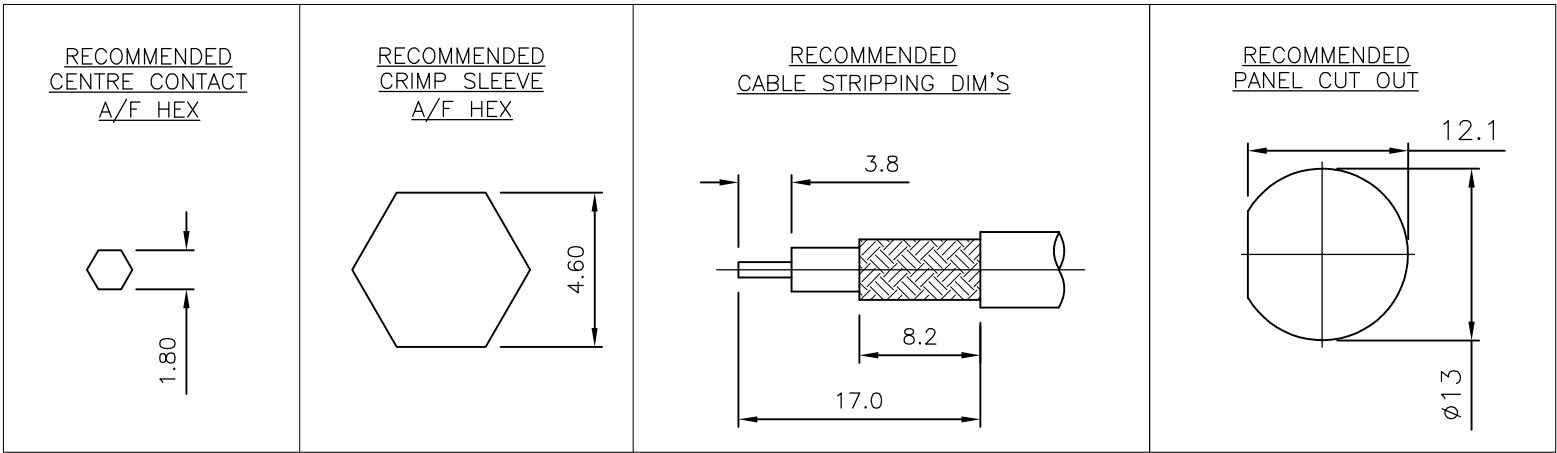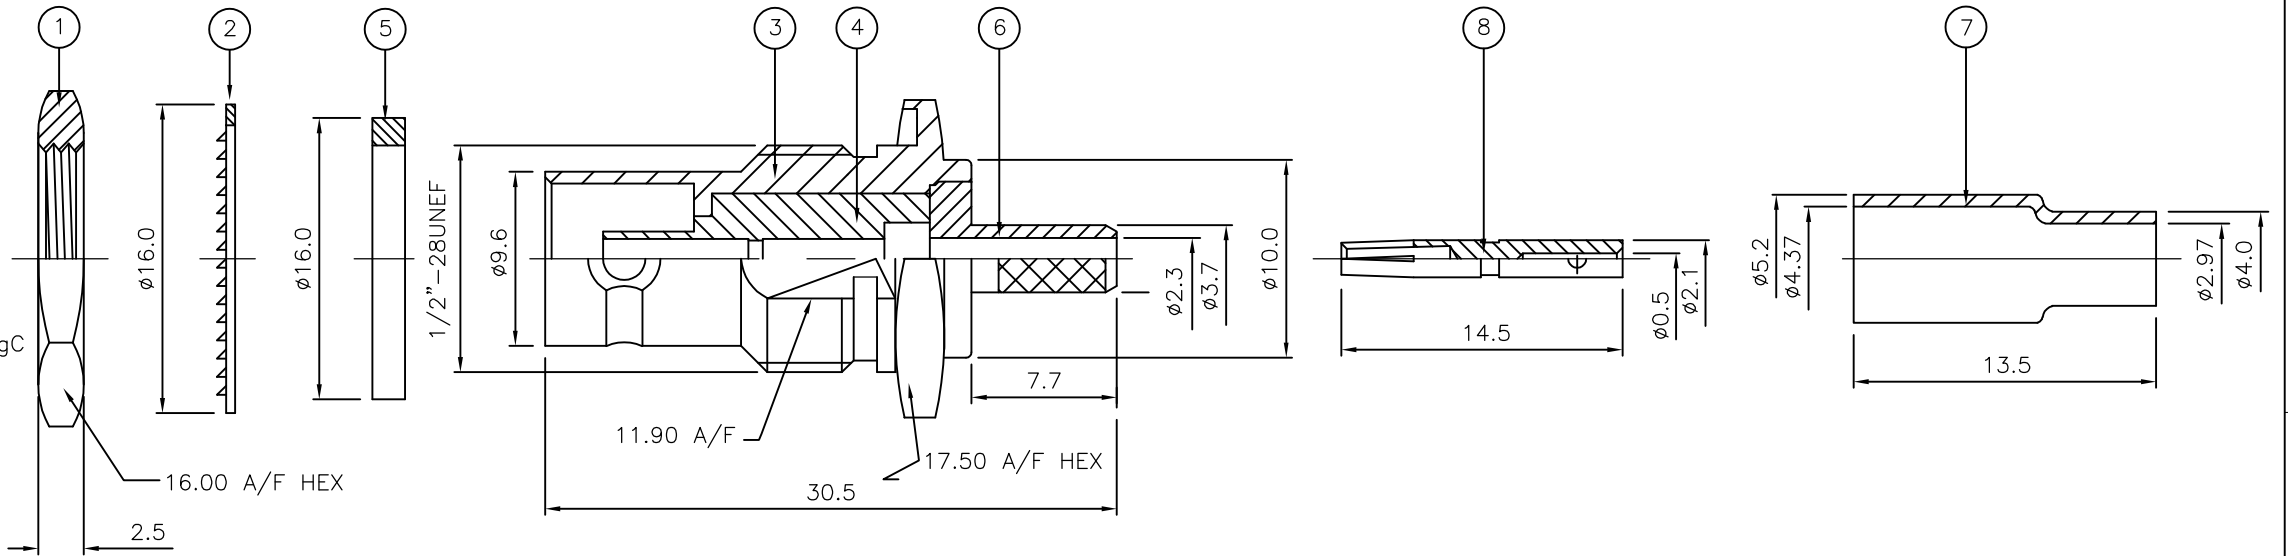

		1	1	BRASS	3	CONTACT	8
		1	1	BRASS	4	FERRULE	7
		1	1	BRASS	4	CHASSIS	6
		1	1	SILICONE RUBBER	5	GASKET	5
		1	1	PTFE		INSULATION	4
		1	1	BRASS	4	BODY	3
		1	1	STEEL	4	LOCKWASHER	2
		1	1	BRASS	4	HEX NUT	1
		6--0	1--0	MATERIAL		DESCRIPTION	ITEM
		2	1				
QUANTITY PER ASSY				PARTS LIST			

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J.SANDWELL 01FEB06	 Tyco Electronics Corporation Bideford EX39 4HE		
		CHK S.PARLOW 01FEB06			
DIMENSIONS: mm		APVD F.WHEELER-KING 01FEB06	NAME BNC BULKHEAD JACK REAR MOUNT CRIMP 75 OHM RG179B/U, 187 A/U, URM 111		
		PRODUCT SPEC —			
		APPLICATION SPEC 411-3247			
		SIZE A3	CAGE CODE 00779	DRAWING NO C-1337549	RESTRICTED TO —
		CUSTOMER DRAWING			SCALE NTS
MATERIAL SEE TABLE		FINISH —			
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± — 1 PLC ± — 2 PLC ± — 3 PLC ± — 4 PLC ± — ANGLES ± —					