
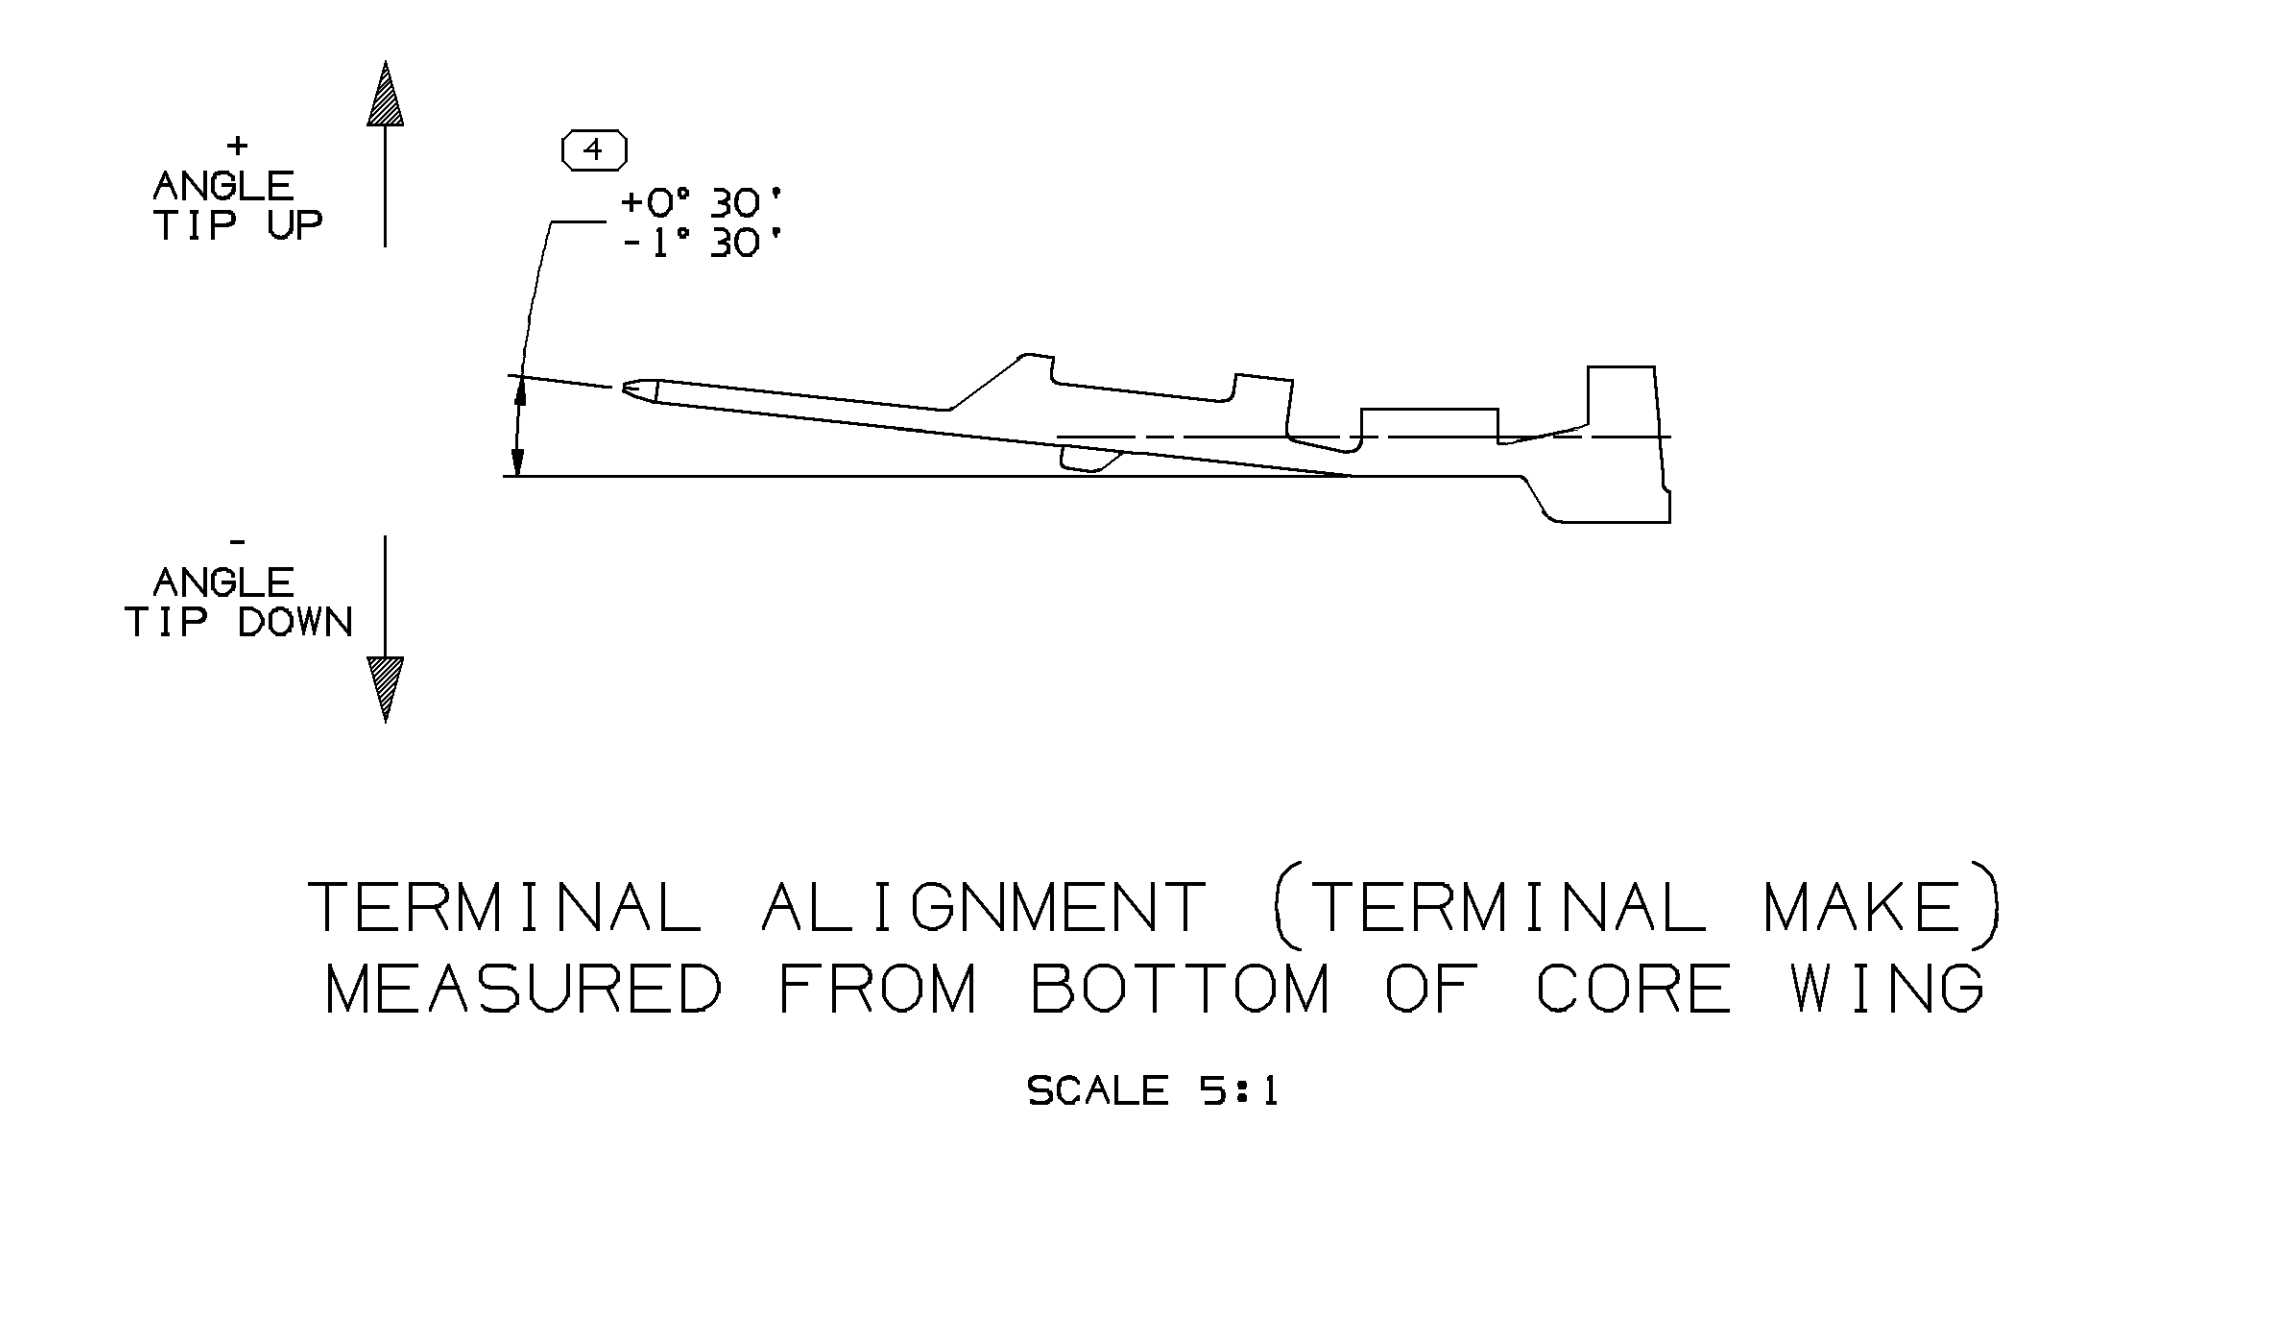
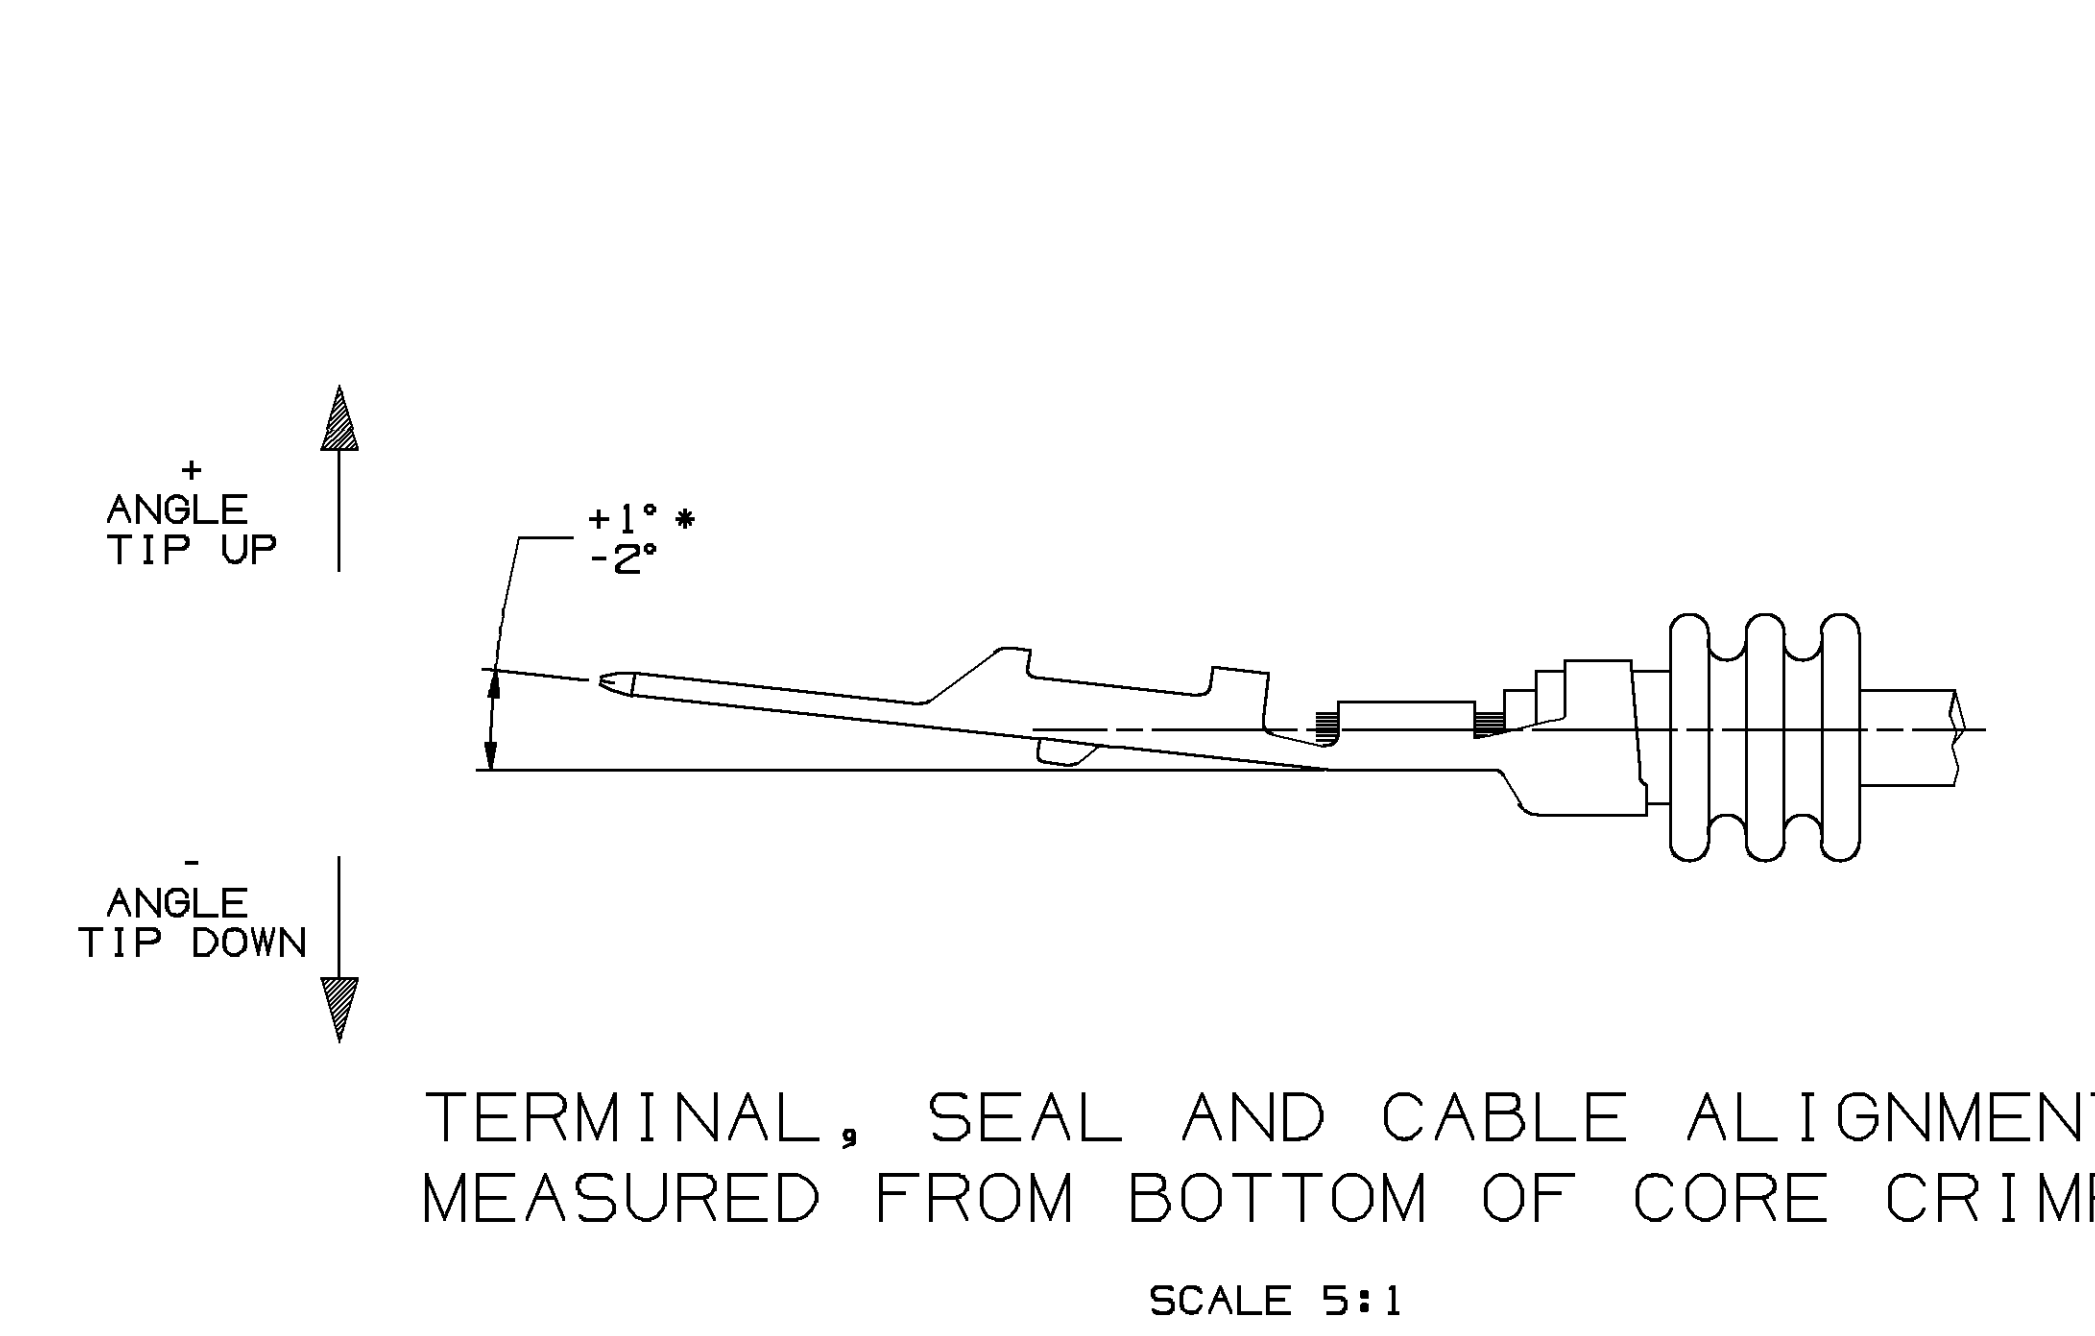
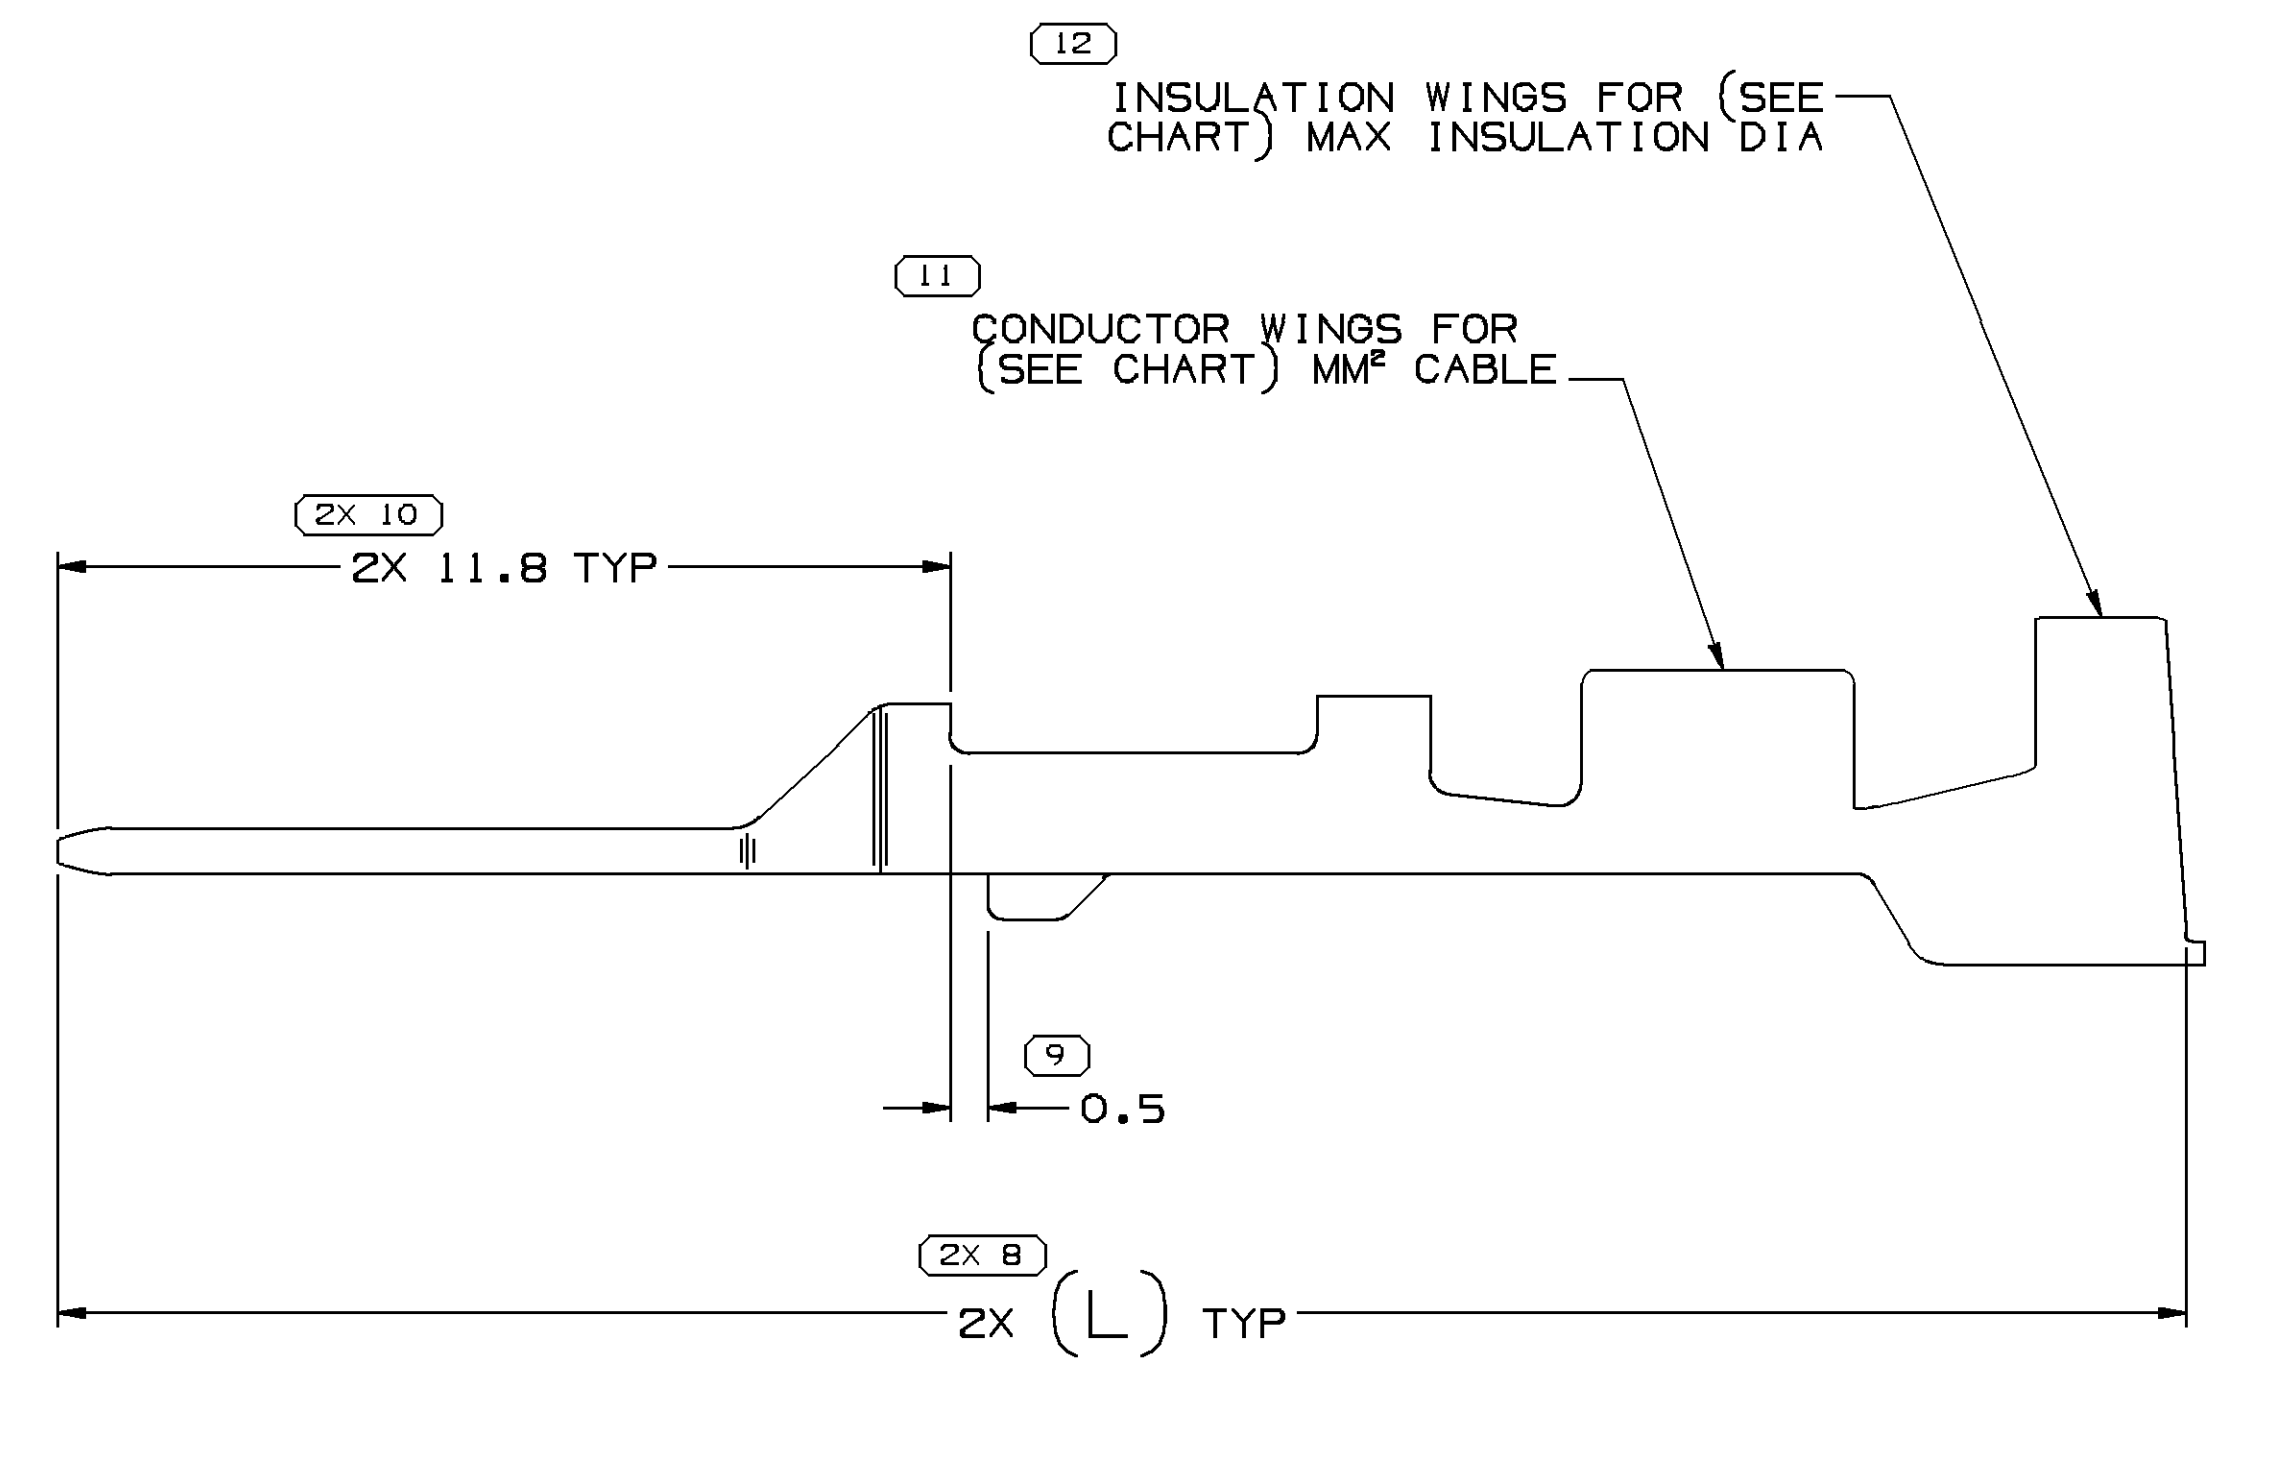
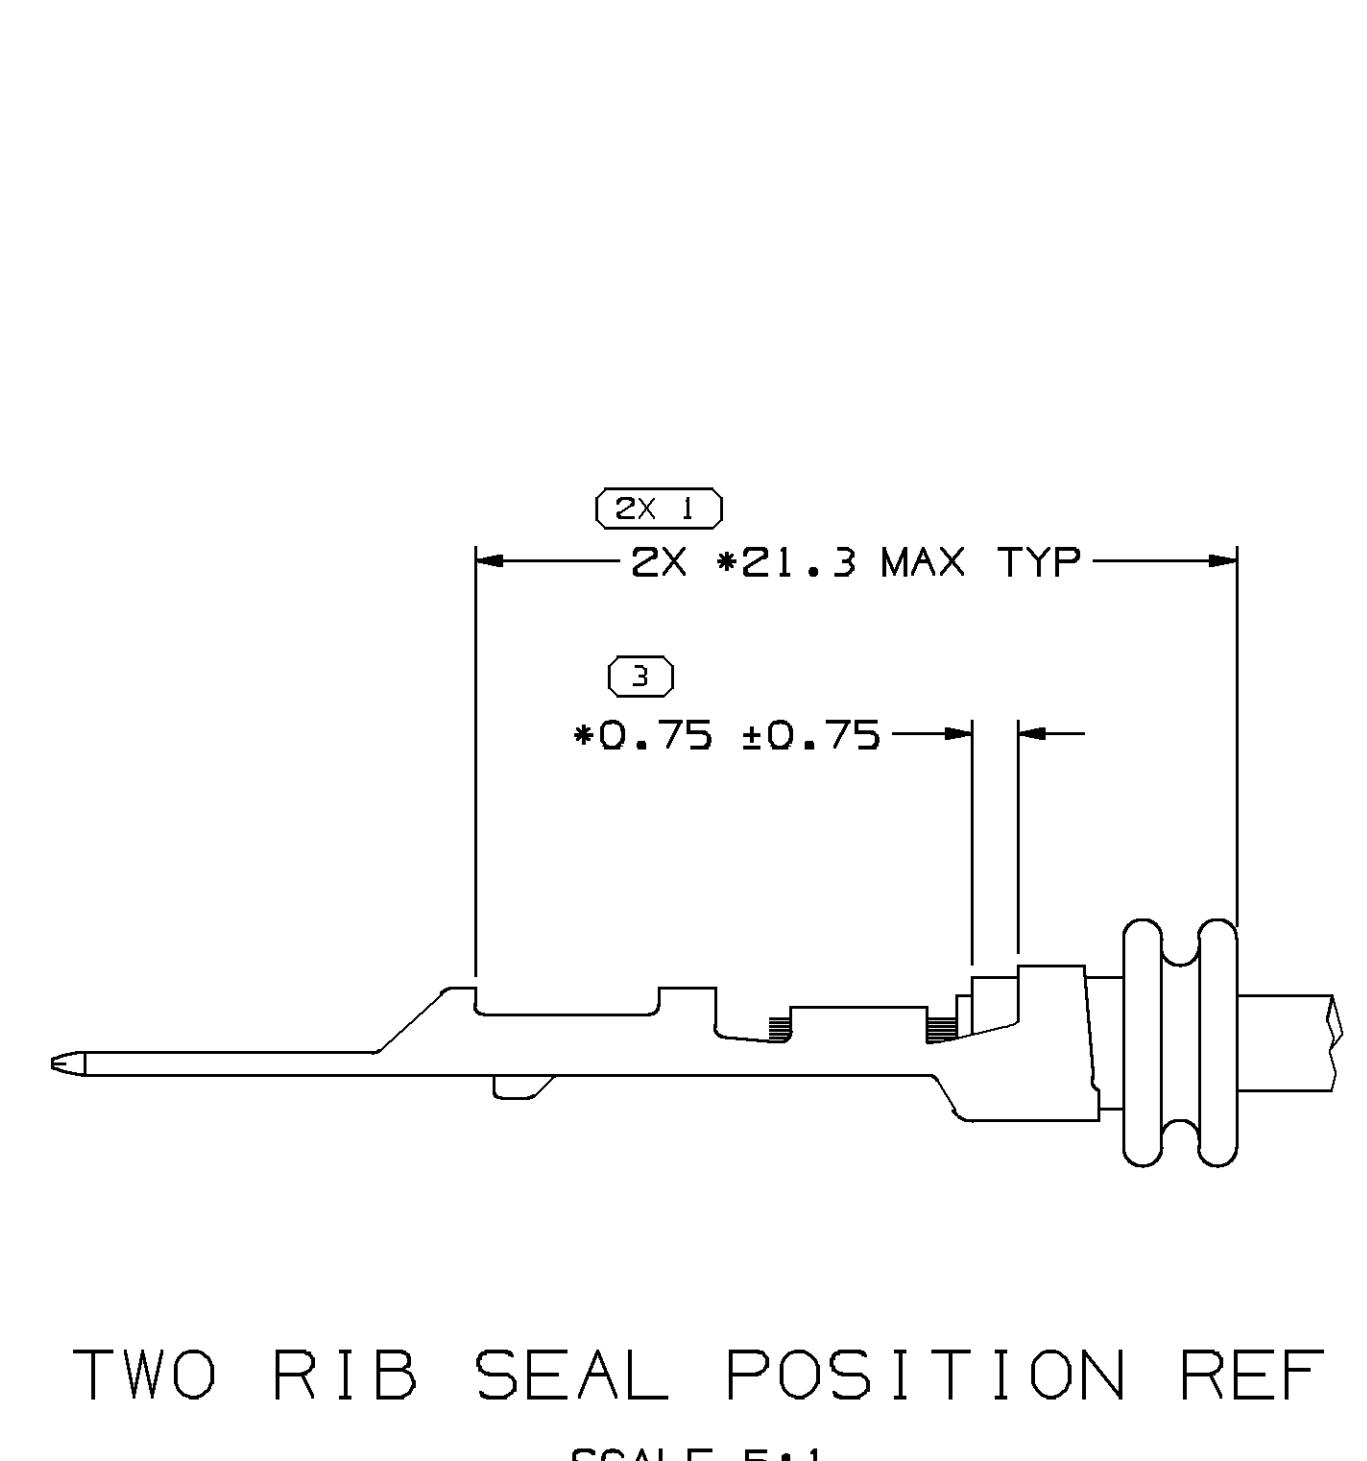
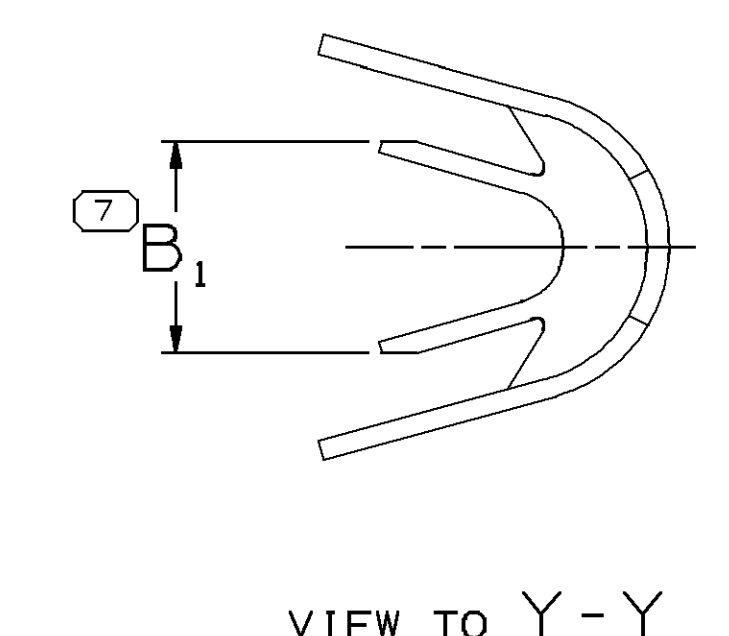
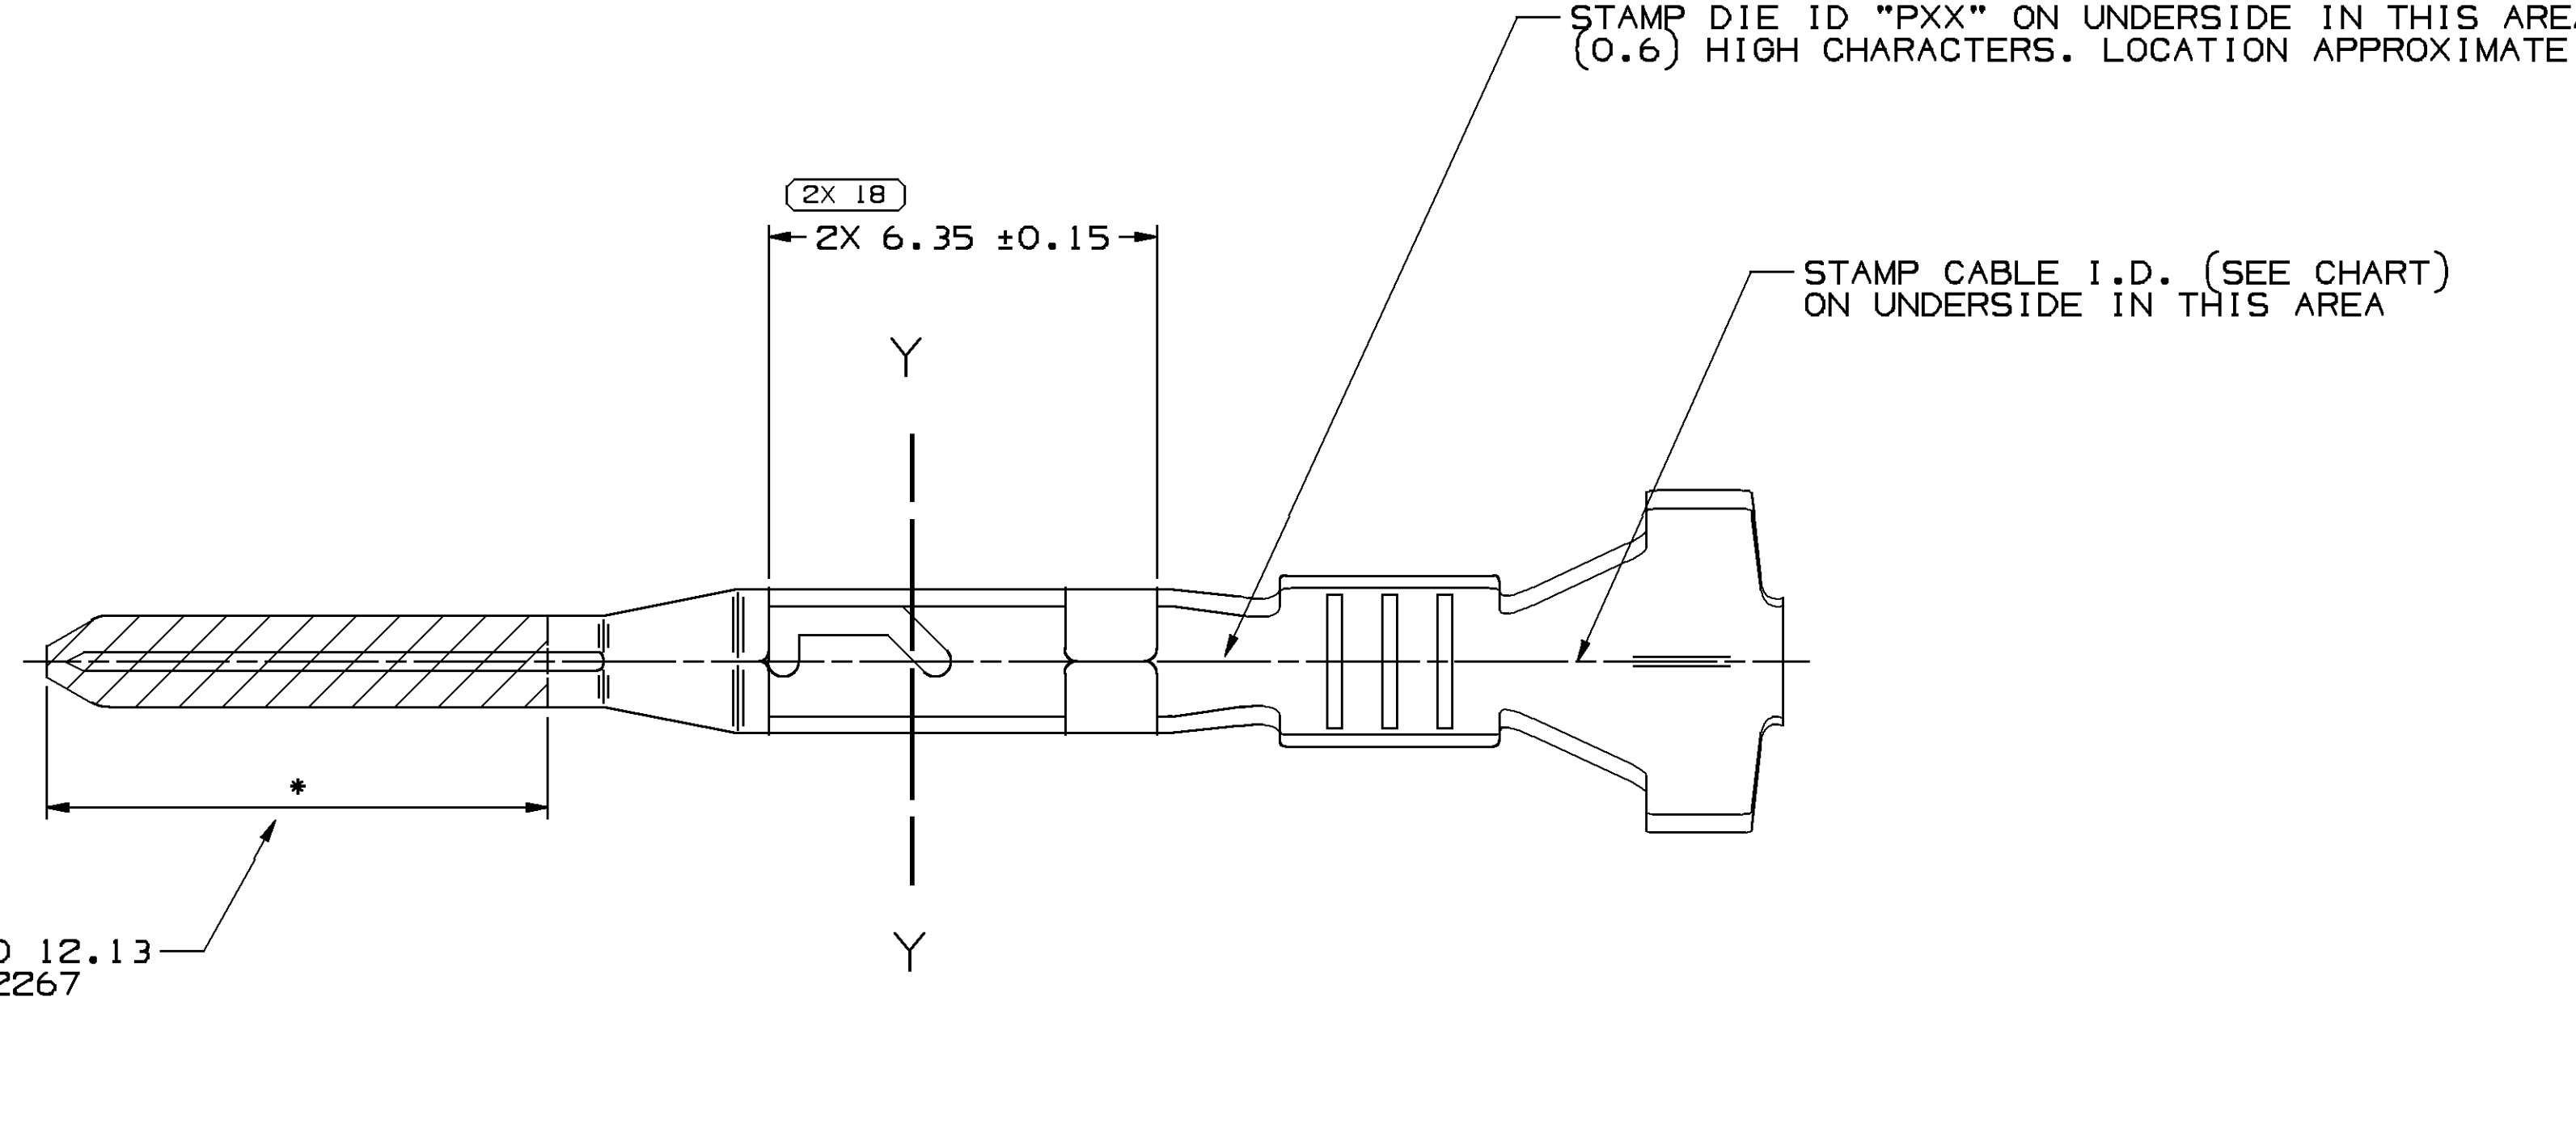


SYMBOL DEFINITION		MISSING SYMBOLS	
A DIMENSION WITHOUT AN INSPECTION REPORT SYMBOL DOES NOT REQUIRE INSPECTION. IT MAY BE CONTROLLED ON THE INDIVIDUAL COMPONENT DRAWING.	TOTAL NO OF INSPECTIONS REQUIRED	2 5-6	
	LAST NO. USED	19	

OWB STATUS				ZONE	REVISION HISTORY	AUTH	DR	AP/D	
DATE	STG	REV	N/P					CHG	1
31JUL02	R	05	-	-	CLEARED REV COLUMN; RELEASED 15443663	228344	CJP	CJP	PMJ
17OCT02	R	06	-	-	ALL PARTS - UPDATED PDM ATTRIBUTES	227307	EVV	EVV	TPR
25FEB03	R	07	-	-	15443663 - OBSOLETED	237063	MAC	MAC	PMJ
16AP03	R	08	-	-	ALL PARTS - ADDED APPLICATION, TYPICAL CABLE SEAL AND TYPICAL SEALING CAVITY CONFIG TO CHART	239445	TLD	TLD	EJH
20JUL03	R	09	-	-	15326268, 15326269, 15355563, AND 15373413 - ADDED TERMINAL MAKE STRAIGHTNESS AND TERMINAL CRIMP STRAIGHTNESS VIEWS.	242518	BRB	BRB	MC
01MR04	R	10	-	-	15373413 - UPDATED PDM ATTRIBUTES	252269	EES	EES	EJH
04OCT04	R	11	-	-	15326268 - 69, 15355563 & 15373413 - ADDED STAMP DIE I.D	259308	OPS	JVM	MKM
22SEP08	R	12	-	-	13722265 & 13722267 - RELEASED	406110	JOA	FKV	EJB
01DEC08	R	13	-	-	15326268, 15326269, 15355563, 15373413 - UPDATED MATERIAL CALLOUT	406833	MH	PYP	MH
18MR09	R	14	-	-	13722265 & 13722267 - UPDATED PDM ATTRIBUTES	407578	LVR	FKV	GER
16OCT09	R	15	-	-	13722265 & 13722267 - ADDED LABEL OF SILVER PLATING ZONE	409243	FKV	FKV	GER
29MR10	R	16	-	-	ALL ACTIVE PARTS - UPDATED PDM ATTRIBUTES	410409	FRE	FRE	MAC
16AUG10	R	17	-	-	ALL ACTIVE PARTS - ADDED PLATING NOTE, UPDATED MAT'L CALLOUT AND ADDED CONTACT AREA & CRIMP AREA COLUMNS ON CHART	411632	JRL	JRL	VMR
06OCT10	R	18	-	-	ALL ACTIVE PARTS - UPDATED PLATING NOTES	412129	CBG	CBG	VMR
23AUG11	R	19	-	-	ALL ACTIVE PARTS - ALTERNATIVE MAT'L SIZE WAS MAT'L SIZE AND ADDED PREFERRED MAT'L SIZE COLUMN	415183	AGM	JVM	OAF
28SEP11	R	20	-	-	13722265-67 - ALTERNATIVE MAT'L SIZE WAS 0.3 X 35.75 AND PREFERRED MAT'L SIZE WAS EMPTY	415603	BLG	BLG	OAF

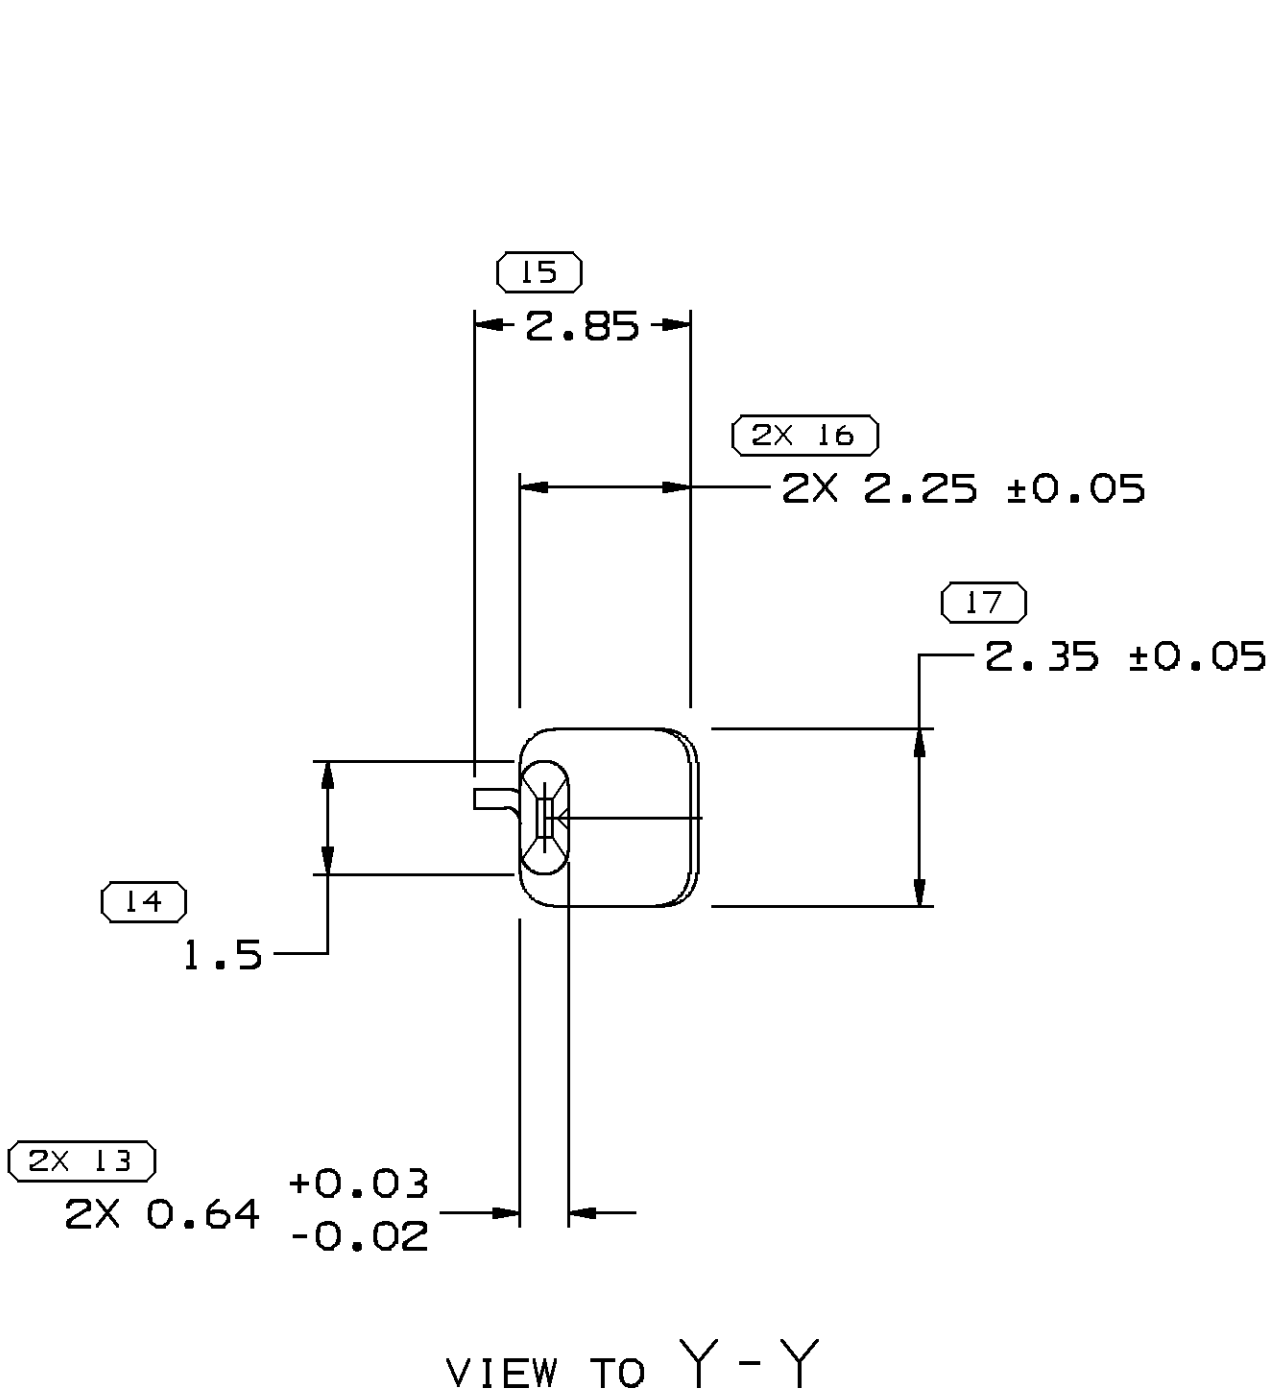

NOTES

- UNLESS OTHERWISE SPECIFIED AND/OR INDICATED: DIMENSIONS ARE TO FACE OF VIEW SHOWN AND AUTOMATICALLY ROUNDED BY COMPUTER FOR INSPECTION (SEE MATH MODEL FOR PRECISE DIMENSIONS). FOR ALL OTHER DIMENSIONS NOT SHOWN BUT REQUIRED FOR TOOL BUILD, SEE MATH MODEL FOR PRECISE TOOL PATH DATA.
- REFERENCE MATING COMPONENTS OR EQUIVALENT: TERMINAL 12191818
- * DENOTES DIMENSIONS MADE AT CUT OFF AND CRIMP DIE.
- PLATING TYPE:
 - REFLOW TIN 1.9-3.3 MICROMETERS THICK WITH A COPPER UNDERPLATE 0.5 MICROMETER TO 1.0 MICROMETER THICK.
 - SILVER 3.5-6.0 MICROMETERS THICK OVER 0.13-0.25 MICROMETERS THICK NICKEL UNDERPLATE.
 - MATE TIN ELECTROPLATE 1.9-7.0 MICROMETERS THICK WITH A NICKEL UNDERPLATE 0.13-0.25 MICROMETERS THICK.

PLATING TYPE INFORMATION SHOWN ABOVE IS REFERENCE ONLY. PLATING REQUIREMENTS ARE CONTAINED IN APPLICABLE MATERIAL SPECIFICATION.

PART NO	REV	N/P	STATUS	PREFERRED MAT'L SIZE	ALTERNATIVE MAT'L SIZE	MAT'L DESCRIPTION	SIZE (MMF)	ID	DIA	TYPE	B ₁ ±0.2	(L)	APPLICATION	TYPICAL CABLE SEAL	TYPICAL SEALING CAVITY CONFIGURATION	CONTACT AREA PLATING TYPE SEE NOTE (4)	CRIMP AREA PLATING TYPE SEE NOTE (4)
13722267	01	A0	-	0.3 X 35.75	-	COPPER ALLOY	0.35 - 0.5	21	1.85 - 1.2±0.15	201	2.1	28.15	SEALED (GT)	12191226 OR EQUIVALENT	Ø 4 ROUND	11	111
13722265	01	A0	-	0.3 X 35.75	-	COPPER ALLOY	0.75 - 1	17	2.25 - 1.7±0.15	201	2.65	28.15	SEALED (GT)	12191227 OR EQUIVALENT	Ø 4 ROUND	11	111
15443663	01	AC	OBSOLETE	-	-	-	0.75 - 0.8	19	2.02 - 1.7	201	2.65	28.15	SEALED (MINI)	15305351 OR EQUIVALENT	3.2 X 4 OVAL	-	-
15373413	01	AM	-	0.3 X 35.75	0.3 X 36.12	COPPER ALLOY	0.75 - 0.8	18	2.02 - 1.7	201	2.65	28.15	SEALED (MINI)	15305351 OR EQUIVALENT	3.2 X 4 OVAL	1	1
15355563	01	AL	-	0.3 X 35.75	0.3 X 36.12	COPPER ALLOY	0.35 - 0.5	21	1.85 - 1.2	201	2.1	28.15	SEALED (MINI)	12191229 OR EQUIVALENT	3.2 X 4 OVAL	1	1
15326269	02	AK	-	0.3 X 35.75	0.3 X 36.12	COPPER ALLOY	0.75 - 1	17	2.25 - 1.7±0.15	201	2.65	28.15	SEALED (GT)	12191227 OR EQUIVALENT	Ø 4 ROUND	1	1
15326268	02	AK	-	0.3 X 35.75	0.3 X 36.12	COPPER ALLOY	0.35 - 0.5	21	1.85 - 1.2±0.15	201	2.1	28.15	SEALED (GT)	12191226 OR EQUIVALENT	Ø 4 ROUND	1	1

PROCESS SENSITIVE DIMENSION		CHART	
FROM	TO	0	>12
10.1	10.2	10.1	10.2
ANGULAR TOLERANCE 12°			

PART DRAWING	
STYLE	
VOLUME (OMP)	DISTR CODE
UNLESS OTHERWISE SPECIFIED	
THIS DOCUMENT IS IN ACCORDANCE WITH ASME Y14.5M-1994 AS MODIFIED BY THE 2003 DIMENSIONING AND TOLERANCING ADDENDUM - (1997) ALL GEOMETRIC TOLERANCES AND RELATED FEATURES APPLY PER RULE #1 (PREFERRED FORM AT MAXIMUM LOCALITY) UNLESS OTHERWISE SPECIFIED.	
THIRD ANGLE PROJECTION	
DO NOT SCALE	
USE MATH DATA	

DELPHI	
DELPHI PACKARD ELECTRICAL/ELECTRONIC ARCHITECTURE WARREN, OH	
DATE	
APR01 H. CASTRILLON	18AP97
APR02 PEDRO YABUR	24AP97
APR03 S.C. HSIEH	12MY97
APR04	
APR05	
SUBSTANCES OF CONCERN AND RECYCLED CONTENT PER DELPHI (0444990)	
DRAWING NUMBER	
TAXI TERM M GT 150 SEALED	
DRAWING NUMBER	
15304703	
SIZE	SCALE
A0	10:1
FRM NO	1 OF 1
SHEET NO	2 OF
STG	REV
R	20