

Type 12 Lay-In Wireway *1485 Series*

Wireway & Accessories



Application

- Designed to enclose and protect electrical wiring from dirt, dust, oil and water.
- All sections and fittings are completely open on each side to allow wires and cables to be placed into the wireway without "pulling through".

Standards

- UL 870 Type 1 (unless marked1)
- CSA Type 1 (unless marked1)
- **Complies with**
 - NEMA Type 12
 - JIC EMP-1-1967
 - JIC EGP-1-1967
 - IEC 60529, IP54

Construction

- Bodies and covers are formed from 14-gauge steel with 10 gauge steel flanges.
- 12" x 6" size has a 12 gauge steel body with a 14-gauge cover.
- Smooth continuously welded seams.
- Interior surfaces are smooth to prevent wire damage during installation.
- Butt hinged cover is secured with easily operated quick release clamps.
- Oil resistant gaskets are permanently secured.
- Solid oil resistant gaskets are used between flanges when sections and fittings are bolted together.
- One gasket kit, complete with hardware is provided with each straight section or fitting.
- Sealing plate is supplied.
- Flange junctions are sealed with gasket sealing plates, which are put in place after wiring is completed. One is supplied with all straight sections and most fittings; see table for exact number.

Finish

- Sections and components are finished in ANSI 61 gray powder coating.

Notes


- When joining a wireway section or fitting to an enclosure be sure to order a box connector.
- When joining two wireway sections, or joining a wireway section to a fitting a flat sealing plate is required at each junction; necessary kits are supplied with each section and fitting. See table, extra kits may be ordered if

necessary.


- When joining a lay-in wireway section or fitting to a closure plate, a box connector, or cut-off fitting, an angle sealing plate is required at each junction.
- Necessary kits are supplied with each section and fitting - see table. Extra kits, although not normally required, are necessary when joining lay-in wireway to a non-lay-in section or fitting section.

Accessories


- Flat Sealing Plate
- Barrier Kit
- Flexible Fitting
- Cross Fitting
- Cut-Off Fitting (Non Lay-In)
- 45 degree Elbow Top Opening
- 45 degree Elbow Outside Opening
- 90 degree Elbow Inside Opening
- Tee Fitting Top Opening
- Reducers
- 12" Transposition Sections Clockwise & Counter-Clockwise
- Bracket Hanger
- Junction Box
- Angle Sealing Plate
- Swivel Nipple
- Adjustable Fitting
- Cut-Off Fitting (Lay-In)
- Nipple
- 45 degree Elbow Inside Opening
- 90 degree Elbow Top Opening
- 90 degree Elbow Outside Opening
- Tee Fitting Outside and Top Opening
- Box Connector
- Drop Hanger
- Cover Plate




2.5 x 2.5




4 x 4

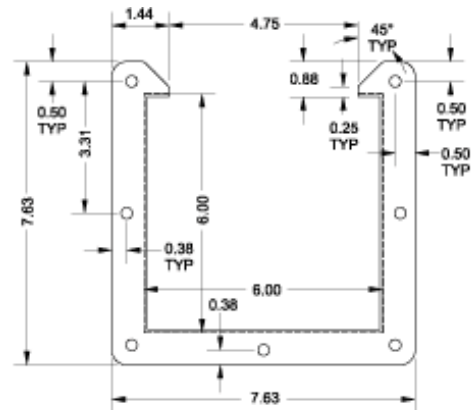

6 x 6

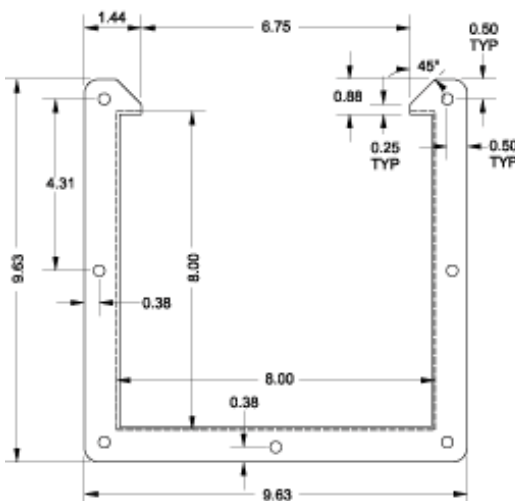

8 x 8

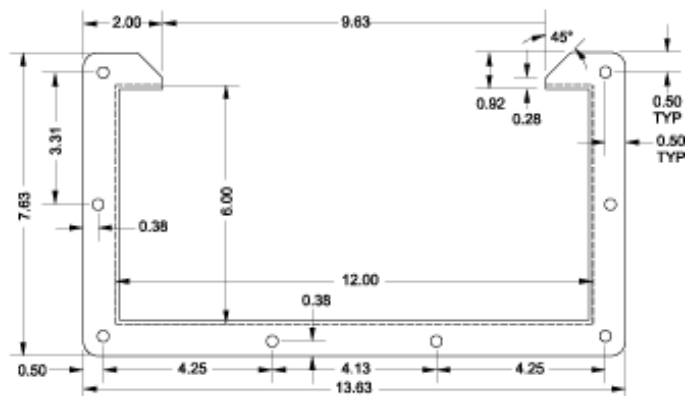

12 x 6

Description	Sealing Plates Supplied	2.5 x 2.5 Part No.	4 x 4 Part No.	6 x 6 Part No.	8 x 8 Part No.	12 x 6 Part No.
6" Section	1 Flat	1485B6	1485C6	1485D6	1485E6	1485F6
12" Section	1 Flat	1485B12	1485C12	1485D12	1485E12	1485F12
24" Section	1 Flat	1485B24	1485C24	1485D24	1485E24	1485F24
36" Section	1 Flat	1485B36	1485C36	1485D36	1485E36	1485F36
48" Section	1 Flat	1485B48	1485C48	1485D48	1485E48	1485F48
60" Section	1 Flat	1485B60	1485C60	1485D60	1485E60	1485F60
120" Section	1 Flat	1485B120	1485C120	1485D120	1485E120	1485F120
60" Long Partition (Barrier)	-	-	1487CB60¹	1487DB60¹	1487EB60¹	1487DB60¹
1" Nipple	1 Flat	1485BM1	1485CM1	1485DM1	-	-
2" Nipple	1 Flat	1485BM2	1485CM2	1485DM2	-	-
3" Nipple	1 Flat	1485BM3	1485CM3	1485DM3	-	-
Box Entry Swivel Nipple	1 Angle	1485BV1	1485CV1	1485DV1	1485EV1	-
Standard Swivel Nipple	2 Angle	1485BV2	1485CV2	1485DV2	1485EV2	-
12" Transposition Clockwise	1 Flat	1485BZ12	1485CZ12	1485DZ12	1485EZ12	-
12" Transposition Counter-Clockwise	1 Flat	1485BZC12	1485CZC12	1485DZC12	1485EZC12	-
Flexible Fitting	None	1485BFF	1485CFF	1485DFF	1485EFF	-
Adjustable Fitting	1 Spec.	1485BX¹	1485CX¹	1485DX¹	1485EX¹	1485FX¹
Cut-Off Fitting Lay-In	1 Flat	1485BW1¹	1485CW1¹	1485DW1¹	1485EW1¹	1485FW1¹
Cut-Off Fitting Non Lay-In	1 Angle	1485BW2¹	1485CW2¹	1485DW2¹	1485EW2¹	1485FW2¹
90° Elbow, Top Opening	1 Flat	1485B9N	1485C9N	1485D9N	1485E9N	1485F9N
90° Elbow, Inside Opening	1 Flat	1485B9P	1485C9P	1485D9P	1485E9P	1485F9P
90° Elbow, Outside Opening	1 Flat	1485B9Q	1485C9Q	1485D9Q	1485E9Q	1485F9Q
45° Elbow, Top Opening	1 Flat	1485B4N	1485C4N	1485D4N	1485E4N	1485F4N
45° Elbow, Inside Opening	1 Flat	1485B4P	1485C4P	1485D4P	1485E4P	-
45° Elbow, Outside Opening	1 Flat	1485B4Q	1485C4Q	1485D4Q	1485E4Q	-
Tee Fitting, Top Opening	2 Flat	1485BTN	1485CTN	1485DTN	1485ETN	1485FTN
Tee Fitting, Outside & Top Opening	2 Flat	1485BTQ	1485CTQ	1485DTQ	1485ETQ	-
Cross Fitting	3 Flat	1485BY	1485CY	1485DY	1485EY	1485FY
Reducer 4 x 4 to 2.5 x 2.5	None	-	1485CRE	-	-	-
Reducer 6 x 6 to 4 x 4	None	-	-	1485DRE	-	-
Reducer 8 x 8 to 6 x 6	None	-	-	-	1485ERE	-
Reducer 12 x 6 to 4 x 4	None	-	-	-	-	1485FREC
Reducer 12 x 6 to 6 x 6	None	-	-	-	-	1485FRED
Junction Box	1 Flat	1485BJ	1485CJ	1485DJ	1485EJ	-
Box Connector	1 Angle	1485BK¹	1485CK¹	1485DK¹	1485EK¹	1485FK¹
Drop Hanger	None	1485BL1¹	1485CL1¹	1485DL1¹	1485EL1¹	-
Bracket Hanger	None	1485BL2¹	1485CL2¹	1485DL2¹	1485EL2¹	-
Cover Plate	1 Angle	1485BH²	1485CH²	1485DH²	1485EH²	1485FH²
Snap On Flat Sealing Plate	None	1485BSM²	1485CSM²	1485DSM²	1485ESM²	1485FSM²
Angle Sealing Plate	None	1485BS9²	1485CS9²	1485DS9²	1485ES9²	1485FS9²

¹ Does not meet CSA or UL requirement

² Maintains ratings on CSA and UL approved wireway

Data subject to change without notice

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Hammond:

[1485FW1](#) [1485FW2](#) [1485FS9](#) [1485F36](#) [1485BSM](#) [1485ETN](#) [1485E4P](#) [1485ETQ](#) [1485E9N](#) [1485E9Q](#) [1485E4N](#)
[1485FSM](#) [1485E4Q](#) [1485ESM](#) [1485E9P](#) [1485C120](#) [1485BS9](#) [1485BW2](#) [1485B36](#) [1485BW1](#) [1485EL1](#) [1485EL2](#)
[1485EV2](#) [1485EV1](#) [1485FRED](#) [1485FREC](#) [1485BL1](#) [1485BM3](#) [1485B12](#) [1485DTQ](#) [1485B24](#) [1485D4P](#)
[1485D4Q](#) [1485BV2](#) [1485BM2](#) [1485DTN](#) [1485BV1](#) [1485B60](#) [1485BL2](#) [1485B48](#) [1485D4N](#) [1485C60](#) [1485CL1](#)
[1485C36](#) [1485CM3](#) [1485CV2](#) [1485CV1](#) [1485CW2](#) [1485ERE](#) [1485CL2](#) [1485C24](#) [1485CW1](#) [1485CS9](#) [1485C12](#)
[1485C48](#) [1485CRE](#) [1485F120](#) [1485C6](#) [1485F6](#) [1485B6](#) [1485D6](#) [1485EW2](#) [1485ES9](#) [1485B120](#) [1485EW1](#)
[1485DV2](#) [1485D48](#) [1485D24](#) [1485DM3](#) [1485DV1](#) [1485D60](#) [1485DL1](#) [1485DL2](#) [1485D12](#) [1485D36](#) [1485DS9](#)
[1485DW2](#) [1485F9P](#) [1485F9N](#) [1485F4N](#) [1485F9Q](#) [1485FTN](#) [1485DW1](#) [1485D9P](#) [1485DSM](#) [1485D9N](#) [1485D9Q](#)
[1485DRE](#) [1485B4P](#) [1485BTN](#) [1485B4Q](#) [1485B9Q](#) [1485B9P](#) [1485B9N](#) [1485BTQ](#) [1485B4N](#) [1485DZC12](#) [1485DH](#)
[1485FK](#) [1485EH](#)