

Flyback Transformers


Nidcom
SwitchmodePower

Part Number	Primary Voltage (Volts)	Secondary Voltages (Volts)	Power Rating (Watts)	V-uSec Rating	Package Style	Pin Style	RoHS	Mechanical	Schematic
30399R	4.75-16	5 12 12	5	9	EFD15	SMD	NO	1	1
30400R	4.75-16	5 15 15	5	9	EFD15	SMD	NO	1	1
30401R	4.75-16	5 24 24	5	9	EFD15	SMD	NO	1	1
30402R	16-40	5 5 5	10	55	EFD15	SMD	NO	1	1
30403R	16-40	5 12 12	10	55	EFD15	SMD	NO	1	1
30404R-LF1	16-40	5 15 15	9	55	EFD15	SMD	YES	1	1
30405R	16-40	5 24 24	10	55	EFD15	SMD	NO	1	1
30416R	4.75-16	5 5 5	5	23	EFD20	SMD	NO	2	4
30418R	4.75-16	5 12 12	5	23	EFD20	SMD	NO	2	4
30420R	4.75-16	5 15 15	5	23	EFD20	SMD	NO	2	4
30422R	4.75-16	5 24 24	5	23	EFD20	SMD	NO	2	4
30424R	16-40	5 5 5	10	66	EFD20	SMD	NO	2	5
30426R	16-40	5 12 12	10	66	EFD20	SMD	NO	2	5
30428R	16-40	5 15 15	10	66	EFD20	SMD	NO	2	5
30430R	16-40	5 24 24	10	66	EFD20	SMD	NO	2	5
30432R	16-40	5 5 5	15	68	EFD20	SMD	NO	2	2
30434R	16-40	5 12 12	15	68	EFD20	SMD	NO	2	2
30438R	16-40	5 24 24	15	68	EFD20	SMD	NO	2	2
30439	16-40	5 5 5	20	190	EFD25	TH	NO	3	3
30440	16-40	5 12 12	20	190	EFD25	TH	NO	3	3
30441	16-40	5 15 15	20	190	EFD25	TH	NO	3	3
30442	16-40	5 24 24	20	190	EFD25	TH	NO	3	3
30442-LF1	16-40	5 24 24	20	190	EFD25	TH	YES	3	3
30443	16-40	5 5 5	30	337	EFD25	TH	NO	3	3
30443-LF1	16-40	5 5 5	30	337	EFD25	TH	YES	3	3
30445	16-40	5 15 15	30	337	EFD25	TH	NO	3	3
30445-LF1	16-40	5 15 15	30	337	EFD25	TH	YES	3	3
30446	16-40	5 24 24	30	337	EFD25	TH	NO	3	3
30446-LF1	16-40	5 24 24	30	337	EFD25	TH	YES	3	3


Flyback Transformers

Midcom


SwitchmodePower

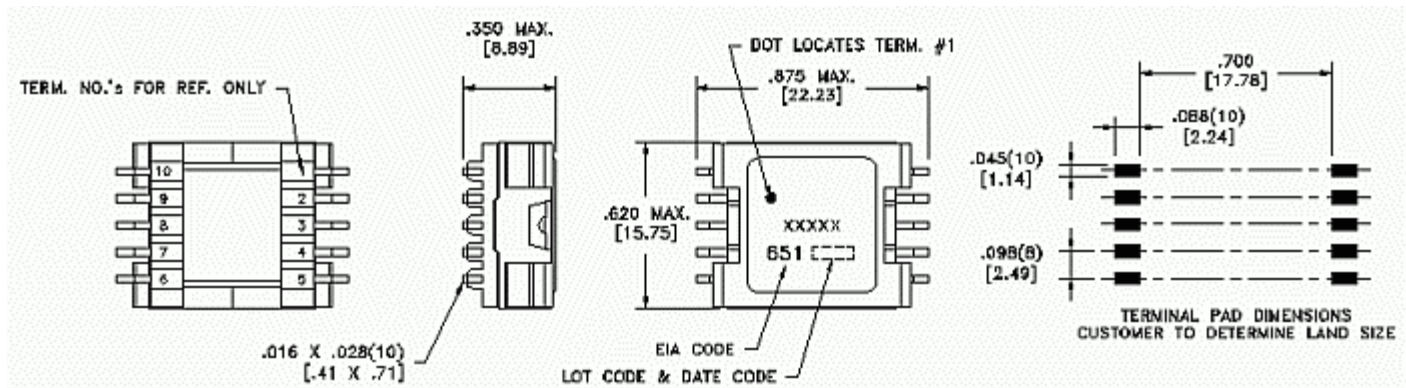

Mechanical 1

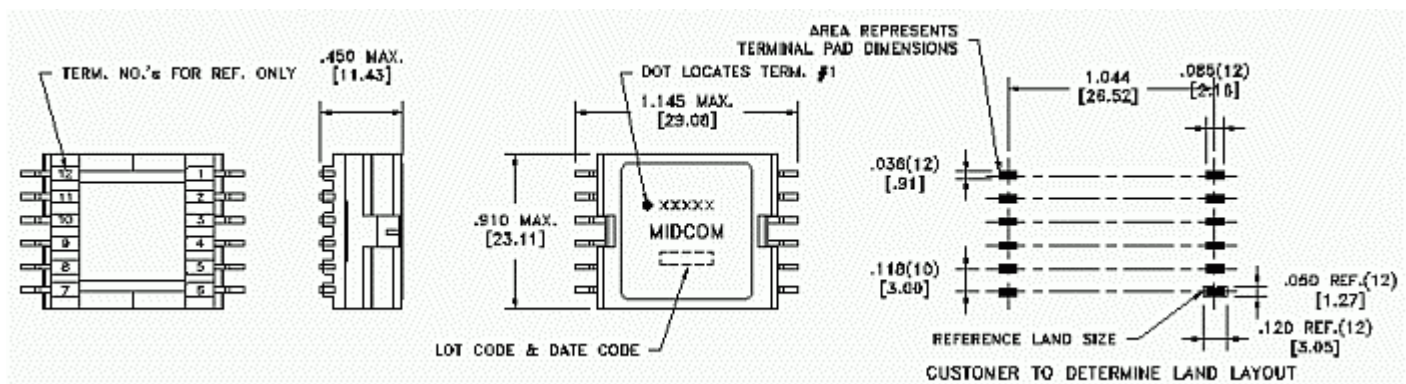

Mechanical 2

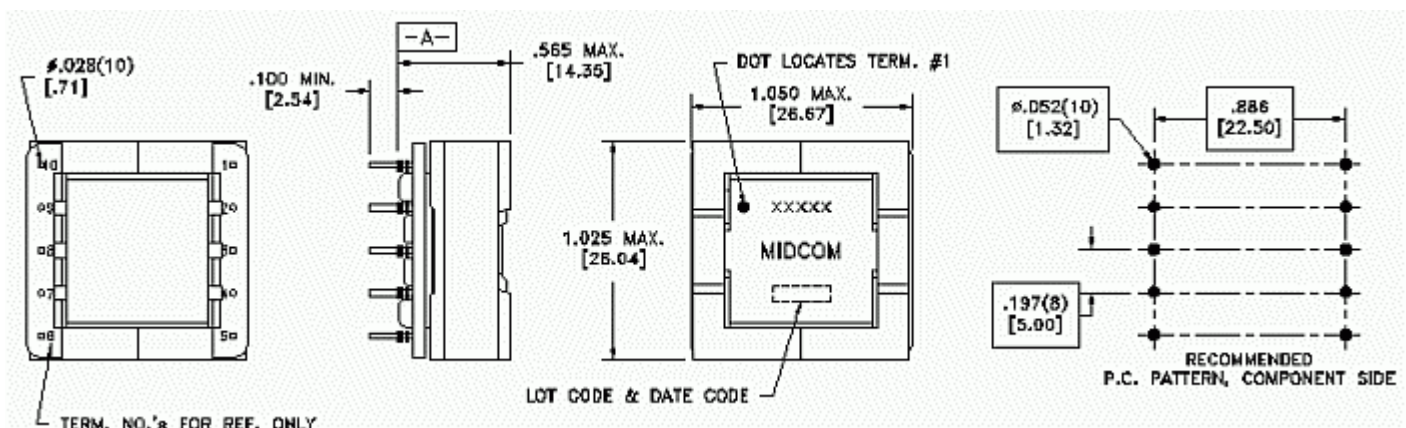


Mechanical 3

Flyback Transformers


Midcom




SwitchmodePower

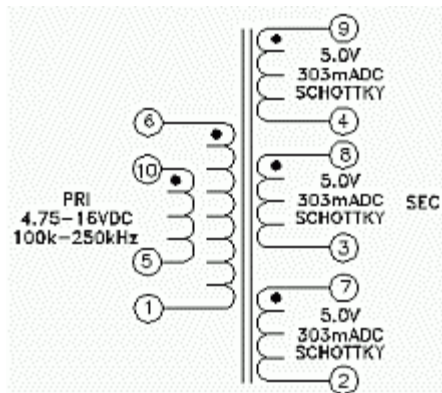


Schematic 1

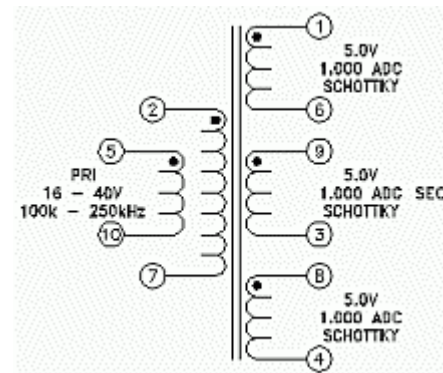


Schematic 2

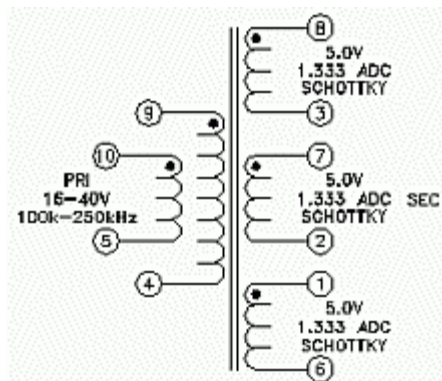

Schematic 3

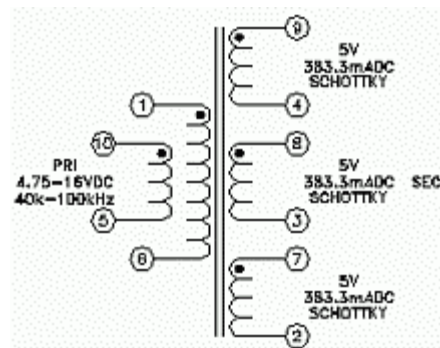

Schematic 4

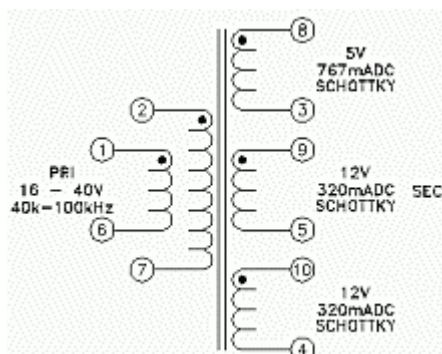

Schematic 5