

Impexa 2.4 GHz SMD Antenna

Product Specification

1 Features


- Designed for 2.4 GHz applications [Bluetooth™, WiFi™ (802.11b/g), Zigbee™, WiMedia™ etc.]
- · Intended for SMD mounting
- · Supplied in tape on reel

2 Description

The Impexa antenna is intended for use with all 2.4 GHz applications. The antenna requires a groundplane, i.e. your device acts as an active part of the antenna and thus demand careful consideration concerning its placement

3 Application

- · Mobile phones
- PDAs
- Headsets
- PC-Cards
- · CF-Cards

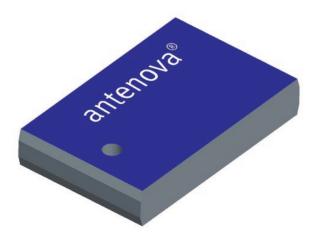



Contents

1 Fe	eatures	1
2 De	escription	1
3 Ap	oplication	1
4 M	odel name	3
5 G	eneral data	3
6 El	lectrical characteristics	3
7 El	lectrical performance	4
	7-1 Return loss	4
	7-2 Smith diagram	4
	7-3 Radiation patterns	4
8 Ar	ntenna Dimensions	5
9 Ar	ntenna Foot print	5
10 E	Electrical interface	6
	10-1 Transmission line and matching	6
	10-2 Test board dimensions	6
	10-3 Test board matching	6
11 S	Soldering	7
	11-1 Recommended soldering conditions	7
	11-2 Leadfree soldering	7
12 F	Reliability	7
	12-1 Temperature and Humidity	7
	12-2 Mechanical	8
	12-3 Miscellaneous	8
	12-4 Judgement standard	8
13 F	Hazardous Material Regulation Conformance	8
14 A	Application example	9
15 F	Packaging	10
	15-1 Shelf storage recommendation	10
	15-2 Tape characteristics	10
	15-3 Reel dimension	10
	15-4 Box dimension	11
	15-5 Bag properties	11
	15-6 Reel label information	11




4 Model name

30 30 A6150 - 01 Drawing No. Technology -PCB Antenna Family -SMD

30 30 A6250 - 01 Drawing No. Technology -PCB Antenna Family

-SMD

Left feeding





5 General data

Product Name	Impexa 2.4 GHz	
Article No.	3030A6150-01 Left	
Article No.	3030A6250-01 Right	
Frequency	2.4-2.5 GHz	
Polarization	Linear	
Operating temperature	-40 to + 85 degC	

6 Electrical characteristics


	Characteris	stics		Conditions*			
	Min	Тур	Max	Conditions			
Peak Gain	-1.0 dBi	0.2 dBi	0.9 dBi	Frequency 2.4-2.5 GHz, Measured in 3D chamber			
Efficiency	50%	55%	60%	(near field)			
VSWR	1.3 : 1	1.5 : 1	1.9 : 1	Frequency 2.4-2.5 GHz, Measured in Network Analyzer			

^{*}Note all data provided in this table are based on the Antenova reference board




7 Electrical performance


7-1 Return loss

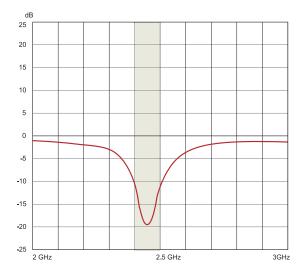

7-2 Smith diagram

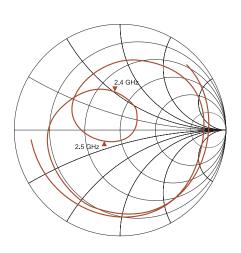


7-3 Radiation patterns

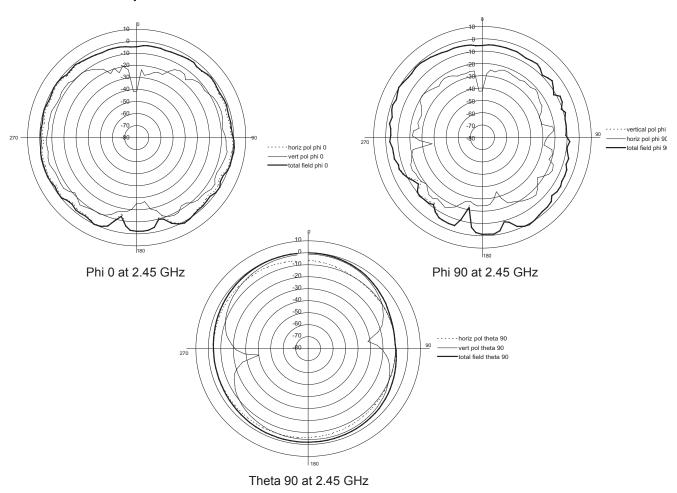





8 Antenna Dimensions



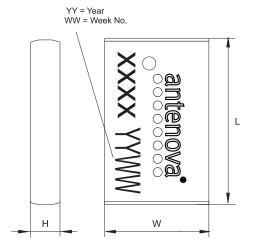



Right variant (Art.No:3030A6250-01)

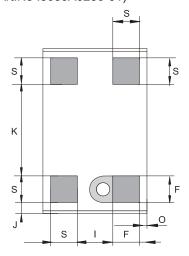


L	W	Н	F	S	1	J	K	0
Length	Width	Height	Feed	Solder				
6.1 ±0.2	3.9 ±0.2	1.1±0.15	1.0±0.1		1.3±0.1	0.35±0.1	3.4±0.1	0.3±0.15

Dimensions in millimeters


9 Antenna Foot print

Left variant (Art. No :3030A6150-01)

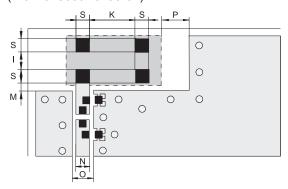

Right variant

(Art.No:3030A6250-01)

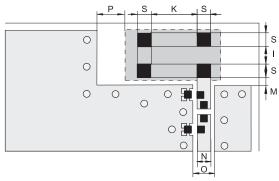


S	F	K	_	M	N	O*	Р	
Pad								
1.0±0.1	1.0±0.1	3.4±0.1	1.3±0.1	0.5±0.2	1.6±0.05	1.9±0.05	> 2	

Dimensions in millimeters




10 Electrical interface

10-1 Transmission line and matching

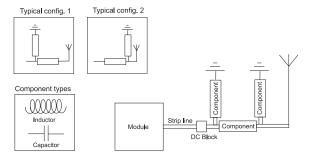


The matching network has to be individually designed using one, two or three components.

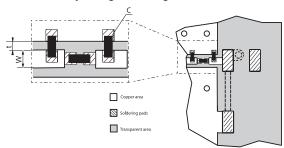

t, w = Unique dimensioning according to your PCB *


C = Inductor and capacitor values according to your specific device*

10-2 Test board dimensions



The testboard is designed for evaluation purposes for Impexa 2.4 GHz SMD antenna. The card has the same size as a typical compact flash card and is fitted with an U/FL connector from Hirose.

10-3 Test board matching



^{*} Antenova provides this service upon request




The testboard is matched with above specified component.

Note! The component value(s) will vary depending on size of PCB, surrounding components etc.


11 Soldering

11-1 Recommended soldering conditions



11-2 Leadfree soldering

The antenna has been tested and approved for leadfree soldering. The reflow curve and solder paste used is listed below.

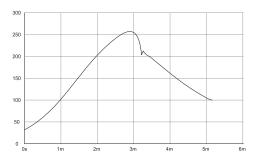

Solder paste: KOKI S3X58-M405

12 Reliability

12-1 Temperature and Humidity

Item	Standard	Low	High	Duration	
Operating temperature	EN/IEC 60068-2-2, Test Bd: Dry heat	-30 degC +90 degC		-	
Temperature cycling	EN/IEC 60068-2-14, Test Na: Change of temperature	-40 degC +90 degC		500 cycles / 10 min	
Storage life Humidity	EN/IEC 60068-2-1, Test Ca: Damp heat	+60 degC / 90% RH		500 h	
Storage life Low temperature	EN/IEC 60068-2-1, Test Ad: Cold	-55 degC	-	500 h	
Storage life High temperature	EN/IEC 60068-2-2, Test Bb: Dry heat	-	+125 degC	500 h	



12-2 Mechanical

Item	Standard	Low	High	Duration
Bending	IEC 60068-2-21, Test Ue1: Bending	Bending 1 mm at support at end of		
	rest de l'. Bellullig	1mm depth on ref		
Shear	IEC 60068-2-21, Test Ue3: Shear	Force of 5 N appli antenna.		
Drop toot		Dummy weight: 15	One drop at each side,	
Drop test		Height: 170cm	total drops: 6	
		Acceleration spec		
Vibration	EN/IEC 60068-2-6, Test Fc (sinusoidal)	Acceleration: 20m	5 cycles per axis	
	(5400.441)	Number of axes: 3		

12-3 Miscellaneous

Item	Standard	Low	High	Duration	
		Acceleration spec			
Vibration	EN/IEC 60068-2-6, Test Fc (sinusoidal)	Acceleration: 20m	5 cycles per axis		
	react a (amagaidal)	Number of axes: 3			
Drop toot		Dummy weight: 15	One drop at each side,		
Drop test		Height: 170cm		total drops: 6	

12-4 Judgement standard

The judgement of the above tests should be made as follows:

- 1. Visual inspection Normal apperance with no obvious cracking, peeling-off.
- 2. Electrical inspection The DUT satisfies the VSWR specification throughout the 2.4-2.5 GHz band

13 Hazardous Material Regulation Conformance

Cadmium and cadmium compound.

Lead and lead compound

Organic brominated compound (PBB, PBDE) Mercury and mercury compound

Polychlorinated biphenyl (PCB) Sexivalent chrome compound

Polychlorinated naphthalene (PCN) Chlorinated paraffin (CP)


Organic tin compound Mirex

Asbestos Formaldehyde

Azo compound Tetra-bromo-bisphenol-A-bis (TBBP-A-bis)



14 Application example

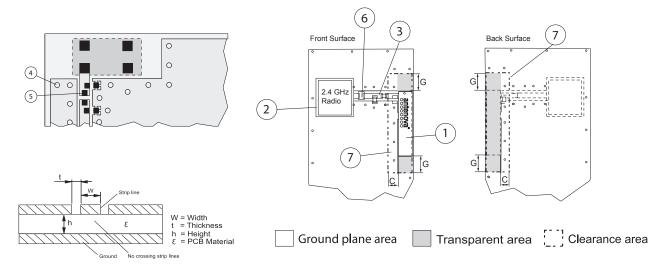

The antenna is of a quarter wave type and is dependent on the groundplane area to complete the antenna function. The antenna performance is also dependent on the size of the groundplane and the transparent area.

1. Placement of the antenna

The antenna shall be placed on a transparent area without underlying groundplane at the edge of the PCB oriented as above. Groundplane area surrounding the antenna should be with a clearence of G=3-5 mm

2. Placement of 2.4 GHz module

To avoid losses in the strip line, the module shall be placed as close to the antenna as possible.

3. Strip line

The strip line must be dimensioned according to your specific PCB. (see fig 1). No crossing strip lines are allowed between the strip line and its ground plane.

4. Via Connections

To avoid spurious effects via connections must be made to analogue ground.

5. Component matching

Component values are depending on antenna placement, PCB dimensions and location of other components.

6. DC Block

Might be needed depending on RF Module configuration.

7. Clearance

No components allowed within the clearence area with a minimum distance to other components, C= 3-5 mm.

Note! Incorrect implementation of the antenna will affect the performance.

Contact Antenova for implementation services.




15 Packaging

15-1 Shelf storage recommendation

Temperature -10 to +40 degree C			
Humidity	Less than 75% RH		
Shelf Life	18 Months		
Storage place	Away from corrosive gas and direct sunlight		

15-2 Tape characteristics

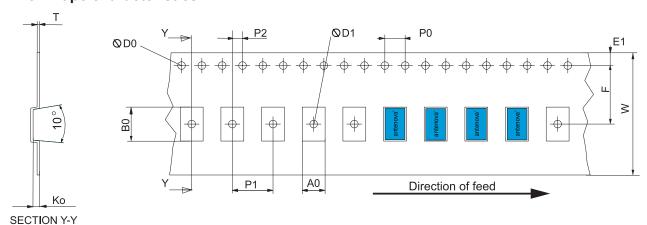


W	F	E,	P _o	P ₁	P ₂	A ₀	B ₀	K ₀	Т	D _o	D ₁
24±0.3	11.5 ±0.1	1.75±0.1	4.0±0.1	8.0±0.1	2.0±0.1	4.3±0.1	6.6±0.1	1.5±0.1	0.3±0.05	1.5±0.1	1.5±0.1

Dimensions in millimeters

Quantity	Leading space	Trailing space
1000 pcs / reel	50 blank antenna holders	37 blank antenna holders


15-3 Reel dimension



Material:	Conductive Polystyrene
Width [mm]	W: 24
Reel dia [mm]	D: 180(7")
Hub dia [mm]	H: 50(2")
Shaft dia [mm]	C: 13



15-4 Box dimension



Material:	Cardboard
Width [mm]	W: 195
Breadth [mm]	B: 195
Thickness [mm]	H: 37

15-5 Bag properties

Antistatic Aluminium Moisture Barrier Bag Thickness [mil] T: 3.2

15-6 Reel label information

antenova®

XXXXAXXXX-XX

Antenova Article number : Description : Reel Quantity : Product name, Frequenzy Hz XXXX Pcs. Customer PO number YYMMDD Order No: Date:



www.antenova.com

Corporate Headquarters

Antenova Ltd.

Far Field House Albert Road Stow-cum-Quy Cambridge CB9 5AR

Tel: +44 (0) 1223 810600 Fax: +44 (0) 1223 810650 Email: info@antenova.com

Asia Headquarters

Antenova Asia Ltd.

3F, No 10, Alley 6, Lane 45 Poa Shing Road Hsin Tien City Taipe County ROC 23145

Tel: +886 (0) 2 2917 6536 Fax: +886 (0) 2 2910 6546 Email: info@antenova.com

Sales Offices

Europe

Charlotta Olander

UK/EU Sales Manager

Tel: +46 702 913731

America

David Nuti

NA Sales Manager

Tel: +1 214 668 0357

Email: Lotta.Olander@antenova.com Email: David.Nuti@antenova.com

Asia

CL Lim

VP Sales Asia

Tel: +886 (0) 931 201 318 Email: CL.Lim@antenova.com



Certificate No: 4598/04