## EXTERNAL LINEAR MAINS ADAPTORS



## Standard AC/DC unregulated models

Part Number	Output	Output	Case
Number	voltage	current	type
	nom (Vdc)	(mA)	
AD-0350	3.0	500	Α
AD-04550	4.5	500	В
AD-0630	6.0	300	В
AD-0650	6.0	500	В
AD-06100	6.0	1 ,000	С
AD-07550	7.5	500	В
AD-075100	7.5	1,000	С
AD-0910	9.0	100	Α
AD-0930	9.0	300	В
AD-0960	9.0	600	В
AD-09100	9.0	1,000	С
AD-09200	9.0	2,000	F
AD-1210	12.0	100	Α
AD-1230	12.0	300	В
AD-1250	12.0	500	В
AD-12100	12.0	1,000	С
AD-12160	12.0	1,600	F
AD-12200	12.0	2,000	F
AD-1510	15.0	100	Α
AD-1550	15.0	500	С
AD-15100	15.0	1,000	D
AD-1825	18.0	250	В
AD-1850	18.0	500	С
AD-2425	24.0	250	В
AD-2440	24.0	1400	С



Image for illustraation purposes only. Products may differ.


Each of the 6 output connectors can plug into the connector marked TIP that terminates the lead from the adaptor. They can plug in either of two ways, so that 'TIP' points to the + (shown here) or to the - on the other side of the output connector, giving + or - at the tip of the connector.

## **General Information**

- · Low cost, high reliability
- Manufactured in UK and China
- Large range of standard models in stock
- Standard and custom-designed models
- Plug-top, desk top and wall mounting models
  Models to meet UK, European and North American standards
- Models to meet other countries' standards (Australia, South
- Full compliance with safety and EMC requirements
- AC/AC and AC/DC (regulated and unregulated) models
- All standard models in black plastic cases; white and other colours to customer order

## Standard AC/DC regulated models

Part	Output	Output	Case
Number	voltage	current	type
	nom (Vdc)	(mA)	
AD-0510R	5	100	А
AD-0530R	5	300	В
AD-0550R	5	500	С
AD-5100R	5	1,000	С
AD-0630R	6	300	В
AD-0680R	6	800	С
AD-0930R	9	300	В
AD-0950R	9	500	С
AD-1210R	12	100	В
AD-1250R	12	500	С
AD-12100R	12	100	F
AD-1510R	15	100	В
AD-1550R	15	500	С
AD-1840R	18	400	С
AD-2410R	24	100	В
AD-2440R	24	400	С

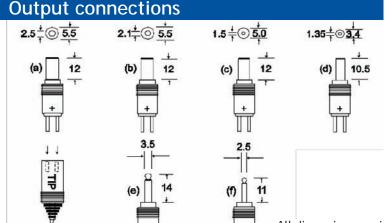

All dimensions are in millimetres (mm) Regulation on all models ±5% of Nominal.

Chancerygate Business Centre, Cradock Road, Reading, Berkshire, RG2 0AH. Tel: 0118 931 1199 Fax: 0118 931 1145

Email: info@stontronics.co.uk www.stontronics.co.uk