



### ■ Features :

- Meet 1U rack mount system
- Universal AC input / Full range
- Active power factor ≥94%
- Protections:Short circuit / Overload / Over voltage
- \* Forced air cooling by built-in DC fan
- \* With power good and fail signal output
- Built-in remote ON-OFF control
- Remote DC sense +5V and +3.3V
- With +5VSB:0 ~ 2.0A max.
- 100% full load burn-in test
- High efficiency
- 2 years warranty








### **SPECIFICATION**

MODEL		IPC-300A					
ОИТРИТ	OUTPUT NUMBER	CH1	CH2	CH3	CH4	CH5	STANDBY
	DC VOLTAGE	3.3V	5V	12V	-5V	-12V	5VSB
	RATED CURRENT	20A	30A	18A	0.5A	1A	2A
	CURRENT RANGE	0 ~ 20A	1 ~ 30A	1 ~ 18A	0 ~ 0.5A	0.1 ~ 1A	0 ~ 2A
	RATED POWER	300W continue. +5V,+3.3V,+12V combine total power output shall not exceed 270W.(The +5 & +3.3Volt combine total output shall not exceed 1					
		(The -5 & -12Volt combine total output shall not exceed 12W)					
	RIPPLE & NOISE (max.) Note.2		50mVp-p	120mVp-p	100mVp-p	120mVp-p	50mVp-p
	VOLTAGE ADJ. RANGE	CH2: 5.05 ~ 5.5V					
	VOLTAGE TOLERANCE Note.3		±5.0%	±7.0%	±8.0%	±10%	±5.0%
	LINE REGULATION	±1.0%	±1.0%	±1.0%	±2.0%	±2.0%	±1.0%
	LOAD REGULATION	±5.0%	±5.0%	±7.0%	±8.0%	±10%	±5.0%
	SETUP, RISE TIME	800ms, 20ms/230VAC 2500ms, 20ms/115VAC at full load					
	HOLD TIME (Typ.)	16ms/230VAC 16ms/115VAC at full load					
INPUT	VOLTAGE RANGE	90 ~ 264VAC					
	FREQUENCY RANGE	47 ~ 63Hz					
	EFFICIENCY (Typ.)	75%					
	AC CURRENT (Typ.)	4.6A/115VAC 2.3A/230VAC					
	INRUSH CURRENT (Typ.)	40A/115VAC 80A/230VAC					
	LEAKAGE CURRENT(max.)	3mA/240VAC					
PROTECTION	OVER LOAD	105 ~ 150% rated output power					
	O TEN EURD	Protection type: Shut down o/p voltage, re-power on to recover					
	OVER VOLTAGE	+3.3V, +5V: 110% ~ 140% of rated voltage ; +12V:13.2V ~ 16V					
	OVER VOLIAGE	Protection type: Shut down o/p voltage, re-power on to recover					
	SHORT CIRCUIT	All output equipped with short circuit					
	SHOKT CIKCOTT	Protection type: Shut down o/p voltage, re-power on to recover					
FUNCTION	POWER GOOD SIGNAL	The TTL compatible signal out with 100ms to 500ms delay after power set up					
	POWER FAIL SIGNAL	The TTL compatible signal will go down at least 1ms before +5V below 4.75V					
	PS-ON INPUT SIGNAL	Power off: PS-ON = "Hi" or ">2V"; Power on: PS-ON = "Low" or "<0.5V"					
ENVIRONMENT	WORKING TEMP.	-10 ~ +60°C (Refer to "Derating Curve")					
	WORKING HUMIDITY	20 ~ 90% RH non-condensing					
	STORAGE TEMP., HUMIDITY	-40 ~ +85°C 10 ~ 95% RH non-condensing					
	TEMP. COEFFICIENT	±0.05% / °C (0 ~ 50°C)					
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes					
SAFETY & EMC (Note 4)	SAFETY STANDARDS	UL60950-1, TUV EN60950-1 approved					
	WITHSTAND VOLTAGE	I/P-O/P:1.5KVAC I/P-FG:2KVAC					
	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:50M Ohms / 500VDC / 25°C/ 70% RH					
	EMC EMISSION	Compliance to EN55032 (CISPR32) Class B, Design refer to FCC part 15 Class B, EN61000-3-2,-3					
	EMC IMMUNITY	Compliance to EN61000-4-2,3,4, 5,6,8,11, light industry level, criteria A					
OTHERS	MTBF	94.1K hrs min. MIL-HDBK-217F (25°C)					
	CONNECTOR	ATX main power connector * 1ea; +12V power connector * 1ea					
	CONNECTOR	Peripheral power connector * 3ea; Floppy drive power connector * 1ea					
	COOLING	Forced air ventilation by 4cm DC fan					
	DIMENSION	260*83*40mm (L*W*H)					
	PACKING	1.46Kg; 10pcs/15.6	Kg/0.89CUFT				


- 4. The power supply is considered a component which will be installed into a final equipment. All the EMC tests are been executed by mounting the unit on a 360mm\*360mm metal plate with 1mm of thickness. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on http://www.meanwell.com)
- 5. Derating may be needed under low input voltages. Please check the derating curve for more details.



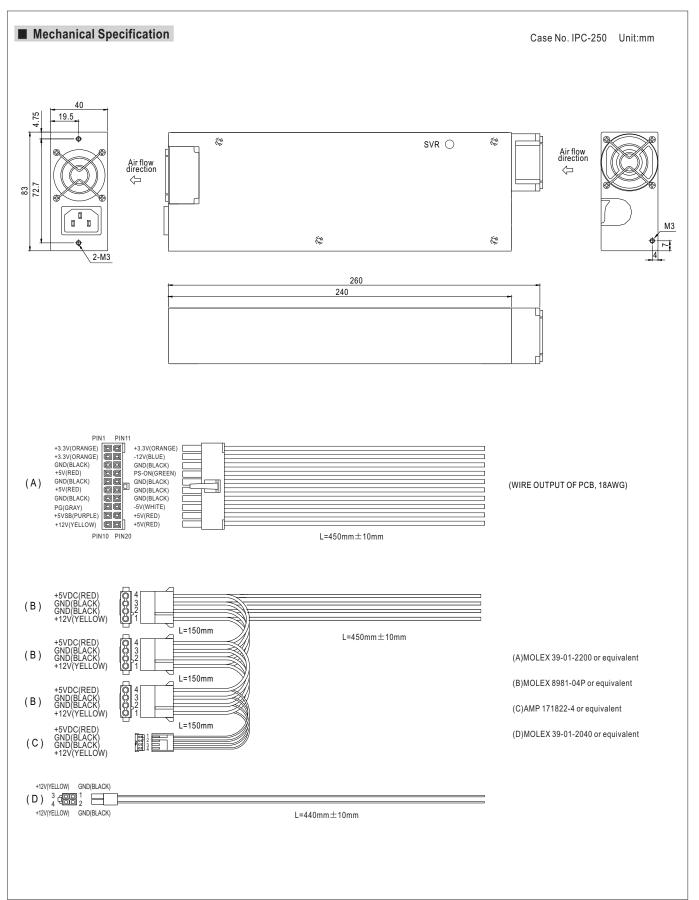





## ■ Block Diagram

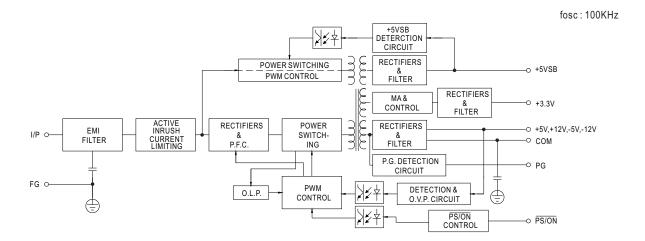

## ■ Derating Curve

### ■ Output Derating VS Input Voltage

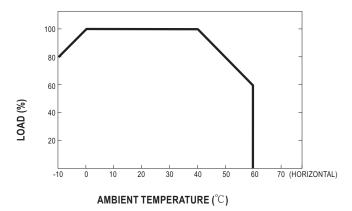







#### Features:

- Meet 1U rack mount system
- Universal AC input / Full range
- Active power factor ≥94%
- \* Protections: Short circuit / Overload / Over voltage
- Forced air cooling by built-in DC fan
- · With power good and fail signal output
- Built-in remote ON-OFF control
- Remote DC sense +5V and +24V
- 24V/3A output an peak 7A for 30sec.(max.)
- With +5VSB:0 ~ 2.0A max.
- 100% full load burn-in test
- High efficiency
- · 2 years warranty










#### **SPECIFICATION** MODEL IPC-300 **OUTPUT NUMBER** CH1 CH2 СН3 CH4 CH5 **STANDBY** DC VOLTAGE 24V 5V 12V -5V -12V 5VSB RATED CURRENT 30A 18A ЗА 0.5A 1A 2A **CURRENT RANGE** 0 ~ 7A 1 ~ 30A 1 ~ 18A 0 ~ 0.5A 0.1 ~ 1A 0 ~ 2A 300W continue. +24V,+5V,+12V combine total power output shall not exceed 270W.(The +24 & +5Volt combine total output shall not exceed 150W) RATED POWER (The -5 & -12Volt combine total output shall not exceed 12W) RIPPLE & NOISE (max.) Note.2 240mVp-p 50mVp-p **OUTPUT** 50mVp-p 120mVp-p 100mVp-p 120mVp-p **VOLTAGE ADJ. RANGE** CH2: 5.05 ~ 5.5V VOLTAGE TOLERANCE Note.3 ±5.0% ±5.0% ±7.0% ±8.0% ±10% ±5.0% LINE REGULATION ±1.0% ±1.0% ±1.0% ±2.0% ±2.0% ±1.0% ±5.0% ±7.0% ±8.0% ±10% ±5.0% LOAD REGULATION $\pm 5.0\%$ 2500ms, 20ms/115VAC at full load SETUP, RISE TIME 800ms, 20ms/230VAC **HOLD UP TIME (Typ.)** 16ms/230VAC 16ms/115VAC at full load **VOLTAGE RANGE** 90 ~ 264VAC **FREQUENCY RANGE** 47 ~ 63Hz EFFICIENCY (Typ.) 80% INPUT AC CURRENT (Typ.) 4 6A/115VAC 2 3A/230VAC **INRUSH CURRENT (Typ.)** 40A/115VAC 80A/230VAC LEAKAGE CURRENT(max.) 3mA/240VAC 105 ~ 150% rated output power **OVERLOAD** Protection type: Shut down o/p voltage, re-power on to recover +24V, +5V: 110% ~ 140% of rated voltage; +12V:13.2V ~ 16V PROTECTION OVER VOLTAGE Protection type: Shut down o/p voltage, re-power on to recover All output equipped with short circuit SHORT CIRCUIT Protection type: Shut down o/p voltage, re-power on to recover **POWER GOOD SIGNAL** The TTL compatible signal out with 100ms to 500ms delay after power set up FUNCTION **POWER FAIL SIGNAL** The TTL compatible signal will go down at least 1ms before +5V below 4.75V **PS-ON INPUT SIGNAL** Power off: PS-ON = "Hi" or ">2V"; Power on: PS-ON = "Low" or "<0.5V" -10 ~ +60°C (Refer to "Derating Curve") WORKING TEMP. **WORKING HUMIDITY** 20 ~ 90% RH non-condensing **ENVIRONMENT STORAGE TEMP., HUMIDITY** $-40 \sim +85^{\circ}$ C $10 \sim 95\%$ RH non-condensing TEMP. COEFFICIENT ±0.05% / °C (0 ~ 50°C) VIBRATION 10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes SAFETY STANDARDS UL60950-1, TUV EN60950-1 approved WITHSTAND VOLTAGE I/P-O/P:1.5KVAC I/P-FG:2KVAC **SAFETY &** I/P-O/P, I/P-FG, O/P-FG:50M Ohms / 500VDC / 25°C / 70% RH ISOLATION RESISTANCE **EMC** (Note 4) Compliance to EN55032 (CISPR32) Class B, Design refer to FCC part 15 Class B, EN61000-3-2,-3 **EMC EMISSION EMC IMMUNITY** Compliance to EN61000-4-2,3,4, 5,6,8,11, light industry level, criteria A **MTBF** 94.1K hrs min. MIL-HDBK-217F (25°C) ATX main power connector \* 1ea; +12V power connector \* 1ea CONNECTOR Peripheral power connector \* 3 ea; Floppy drive power connector \* 1 ea **OTHERS** COOLING Forced air ventilation by 4cm DC fan DIMENSION 260\*83\*40mm (L\*W\*H) **PACKING** 1.46Kg; 10pcs/15.6Kg/0.89CUFT NOTE 1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and $25^{\circ}\mathrm{C}$ of ambient temperature. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. 3. Load regulation is measured from 20% to 100% max. Load. 4. The power supply is considered a component which will be installed into a final equipment. All the EMC tests are been executed by mounting the unit on a 360mm\*360mm metal plate with 1mm of thickness. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to


- perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on http://www.meanwell.com)
- 5. Derating may be needed under low input voltages. Please check the derating curve for more details.



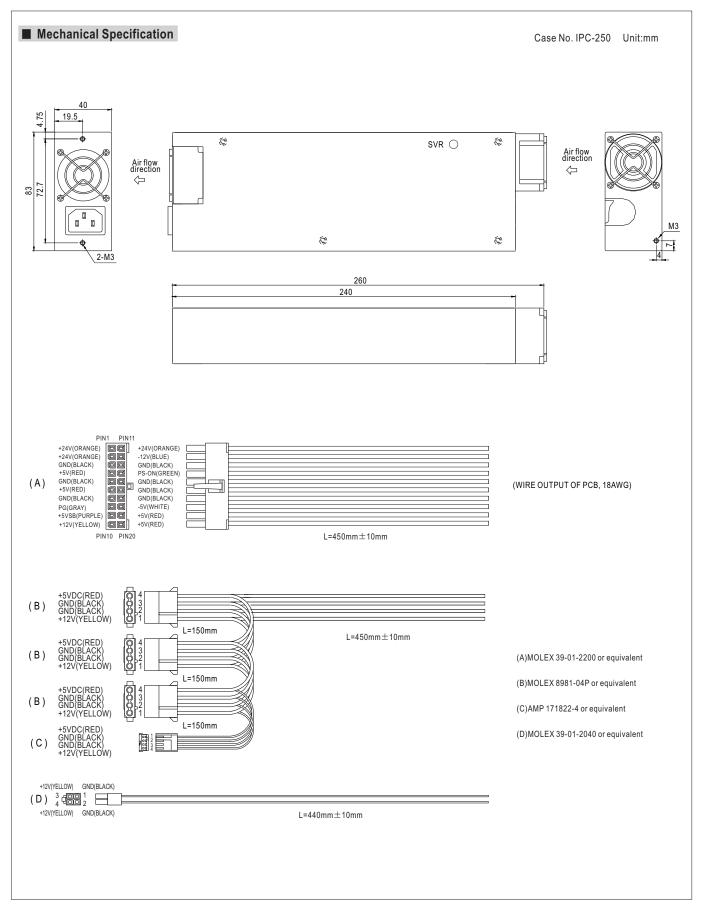



## ■ Block Diagram

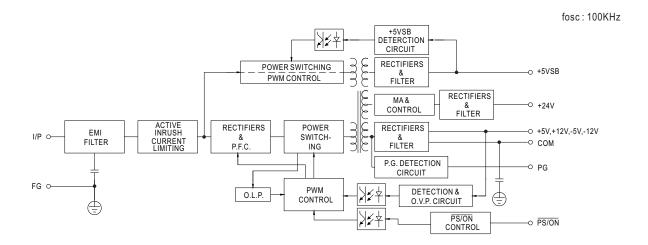

## ■ Derating Curve

# ■ Output Derating VS Input Voltage

