

Rotary Potentiometer

P160 Series




Features:

- 16 mm
- Conductive plastic element
- 100,000 cycle life
- Metal shaft/bushing
- Multi-ganged available
- RoHS compliant



Model Styles

Side Adjust , Solder Lugs	P160KNP
Side Adjust , PC pins	P160KN
Side Adjust , PC Pins, Long pins	P160KN2
Rear Adjust, PC pins	P160KNPD

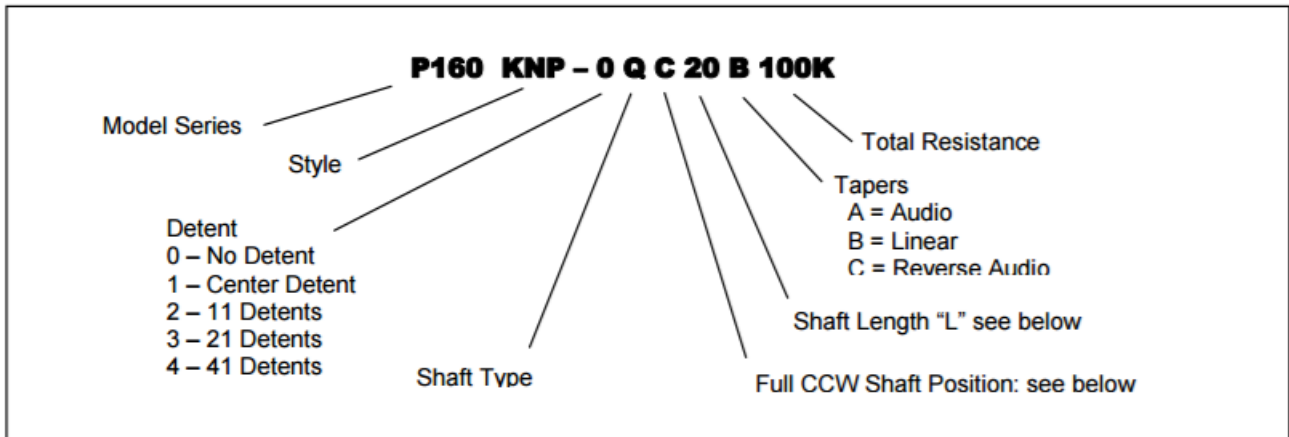

General Note
 TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | BI Technologies
 4200 Bonita Place, Fullerton, CA 92835-1053 | Ph: +1 714 447 2300
 www.ttelectronics.com | sensors@ttelectronics.com

Rotary Potentiometer

P160 Series



Electrical Specifications

Resistance Range, Ohms	500-1M
Standard Resistance Tolerance	± 20%
Residual Resistance	20 ohms max.
Power rating Input Voltage, maximum	200 Vac max.
Power Rated, Watts	0.2W- B taper, 0.1W-others
Dielectric Strength	500Vac, 1 minute
Insulation Resistance, Minimum	100M ohms at 250Vdc
Sliding Noise	100mV max.
Actual Electrical Travel, Nominal	260°

Mechanical Specifications

Total Mechanical Travel	300°± 10°
Static Stop Strength	90 oz-in
Rotational Torque	0.5 to 1.25 oz-in

Environmental Specifications

Operating Temperature Range	-20°C to +70°C
Rotational Life	100,000 cycles

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.


TT Electronics | BI Technologies
4200 Bonita Place, Fullerton, CA 92835-1053 | Ph: +1 714 447 2300
www.ttelectronics.com | sensors@ttelectronics.com

Rotary Potentiometer

P160 Series




Shaft Types

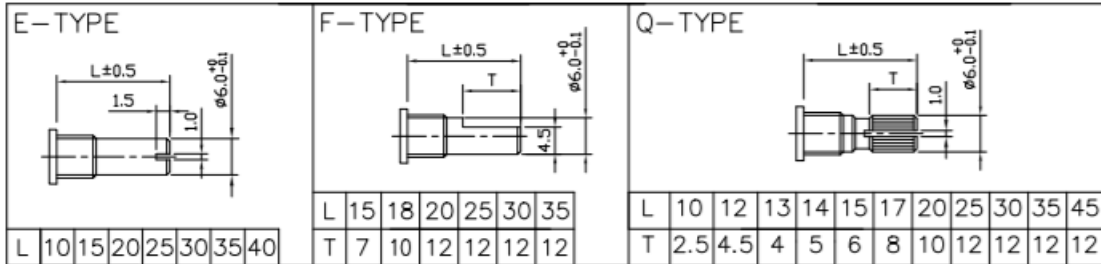

Shaft Position (F-Type Shaft)


Dashed lines on Type "C" and Type "A" shows position of adjustment slot for E-Type and Q-Type shafts

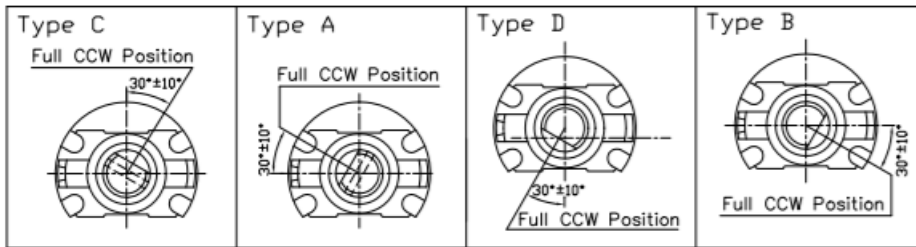

Standard Resistance Values, Ohms

100 200 500 1K 2K 5K 10K 20K 50K 100K 200K 500K 1MEG

Circuit Diagram



General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | BI Technologies
 4200 Bonita Place, Fullerton, CA 92835-1053 | Ph: +1 714 447 2300
www.ttelectronics.com | sensors@ttelectronics.com


Rotary Potentiometer

P160 Series




Outline Drawings

Model P160KNP (Side Adjust , Solder Lugs)

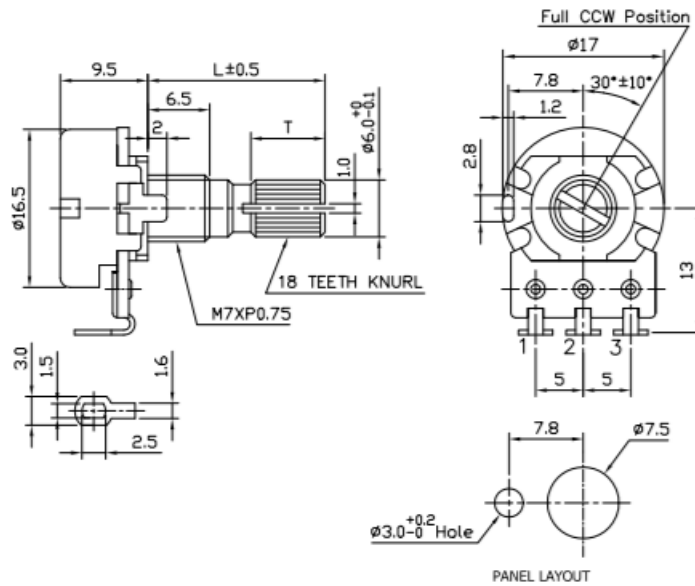

Model P160KN (Side Adjust , PC pins)

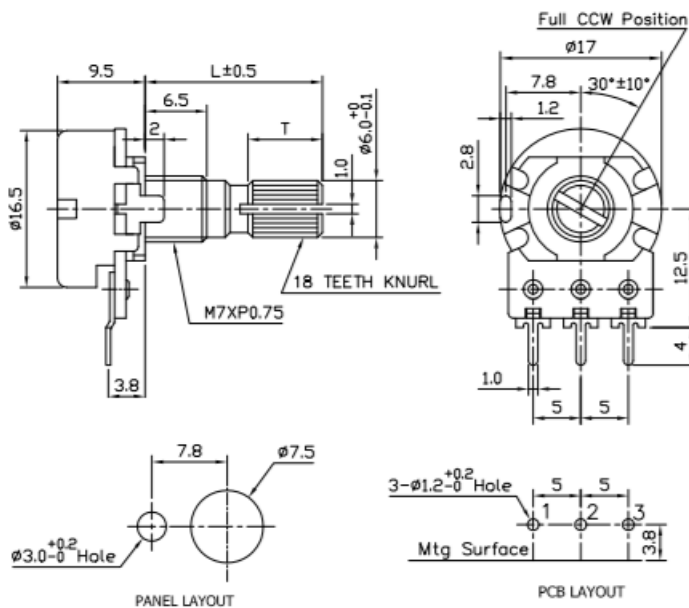

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.


Rotary Potentiometer

P160 Series




Outline Drawings

Model P160KN2 (Side Adjust , PC Pins, Long pins)

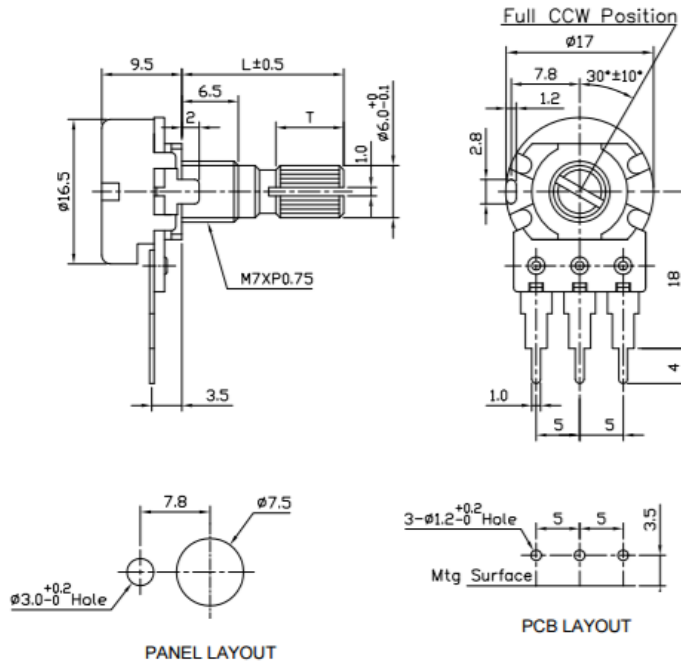

Model P160KNPD (Rear Adjust , PC Pins)

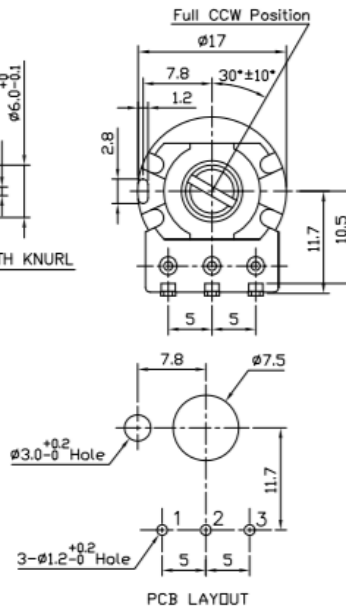

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | BI Technologies
 4200 Bonita Place, Fullerton, CA 92835-1053 | Ph: +1 714 447 2300
www.ttelectronics.com | sensors@ttelectronics.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TT Electronics:

[P160KNP-0QD20B100K](#) [P160KN2-0ECB1MEG](#) [P160KNP-0EB10B100K](#) [P160KNP-0QD20B50K](#) [P160KNP-0EC25B5K](#) [P160KN-0QC15B10K](#) [P160KN-0QC15A1M](#) [P160KN-0FC18C2K5](#) [P160KN-0QC15C100K](#) [P160KNP-0QC15B200K](#) [P160KN-0EB10B100K](#) [P160KN-1EC20B20K](#) [P160KN2-4QC20B10K](#) [P160KN-0QC15B25K](#) [P160KN2-0QA25B1K](#) [P160KN-0QC15B500K](#) [P160KNP-0QC20B100K](#) [P160KNPD-4FC20B10K](#) [P160KN-0QC15B100K](#) [P160KNP-0Q20B50K](#) [P160KNP-02D20B100K](#) [P160KN2-0EC15B1MEG](#) [P160KN-0QC15B50K](#) [P160KNP-0QC20B10K](#) [P160KNPD-4QC15A5K](#) [P160KNP-0Q20B10K](#) [P160KNP-0QC20B50K](#) [P160KN-0QC15B20K](#) [P160KNP-0QD20B10K](#) [P160KN2-0ECB50K](#) [P160KN2-0EC15B50K](#) [P160KN2-0ECB100K](#) [P160KN-0QC15A500K](#) [P160KN2-0EB10B100K](#) [P160KNP-0Q20B100K](#) [P160KN-0EC15B100K](#) [P160KNP-0QC15B200K](#) [P160KN-0QC15B250K](#) [P160KN2-4QB20B10K](#) [P160KN2-0QA25B10K](#) [P160KN-0QC20A10K](#) [P160KNPD-4QA15A5K](#) [P160KN2-0EC15B100K](#) [P160KNP-0QC15B50K](#) [P160KN2-0EC15B10K](#) [P160KN2-0QC17B50K](#) [P160KNP-0FC25B5K](#) [P160KNPD-2QC25B2K](#) [P160KN-0QD15B10K](#) [P160KN-0QD15B1K](#) [P160KNP-0QC15B10K](#) [P160KN-0E15B25K](#) [P160KN-0EC15A500K](#) [P160KN-0EC15A5K](#) [P160KN-0EC15B1MEG](#) [P160KN-0Q15A100K](#) [P160KN-0Q15B1MEG](#) [P160KN-0QC20A1MEG](#) [P160KN-0QD15B1MEG](#) [P160KN2-0QC17B10](#) [P160KN2-0QC17B100K](#) [P160KNP-0EA15A20K](#) [P160KNP-0EC15A100K](#) [P160KNP-0EC15A10K](#) [P160KNP-0EC15A1MEG](#) [P160KNP-0EC15A25K](#) [P160KNP-0EC15A500K](#) [P160KNP-0EC15B250K](#) [P160KNP-0EC15B25K](#) [P160KNP-0EC15B2K](#) [P160KNP-0EC15C100K](#) [P160KNP-0QC20A500K](#) [P160KNP-1FD15B10K](#) [P160KNP-4FB20B10K](#) [P160KNP-4FC15B100K](#) [P160KNPD-0EC25C20K](#) [P160KN-0QC15A100K](#) [P160KNP-0EC15B10K](#) [P160KNP-0EC15A250K](#) [P160KN-0Q15B100K](#) [P160KN-0EA15B10K](#) [P160KNP-0EC15B100K](#) [P160KN-1QC15B10K](#) [P160KNP-0QC20A100K](#) [P160KNP-0QC20B4K7](#) [P160KNP-0QC20A250K](#) [P160KNP-0FC25C10K](#) [P160KNPD-0FB25B100K](#) [P160KNP-0FC25B10K](#) [P160KN-0EC20B1MEG](#) [P160KNP-0QC10B10K](#) [P160KNP-1EC20B10K](#) [P160KNP-0QC15B100K](#) [P160KN-0QC15A250K](#) [P160KNP-0EC15B500K](#) [P160KNP-0FC20B10K](#) [P160KNP-0QC20C500K](#) [P160KN-0QC15C250K](#) [P160KNP-0E15C500K](#) [P160KNPD-0EC25C500K](#)