


8			7					
THIS DRAWING IS UNPUBLISHED.			RELEASED FOR PUBLICATION			20		
(C) COPYRIGHT 20			BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.					
PART NUMBER		REV	FIRST USED	POWER UNIT	FEED TYPE	DESCRIPTION		
1852348-1		C	122500-1	LEADMAKER	AIR FEED	CUTS CARRIER		
1852348-2		C	565435-5	BENCH MODEL K	AIR FEED	CUTS CARRIER		
1852348-3		C	354500-1	BENCH MODEL G	AIR FEED	CUTS CARRIER		
1852348-6		B	122500-1	LEADMAKER	AIR FEED	CONTINUOUS CARRIER		
7-1852348-7		B	-	-	-	SPARE PARTS		

1 RECOMMENDED SPARE PARTS


2 GREASE LIGHTLY

3 GUARD MUST BE IN PLACE WHEN OPERATING APPLICATOR IN A BENCH MACHINE

4 INSTALL ITEMS 101,102 AND 119 ON SIDE OF STRPPER ON APPL HOUSING USING ITEM 21.

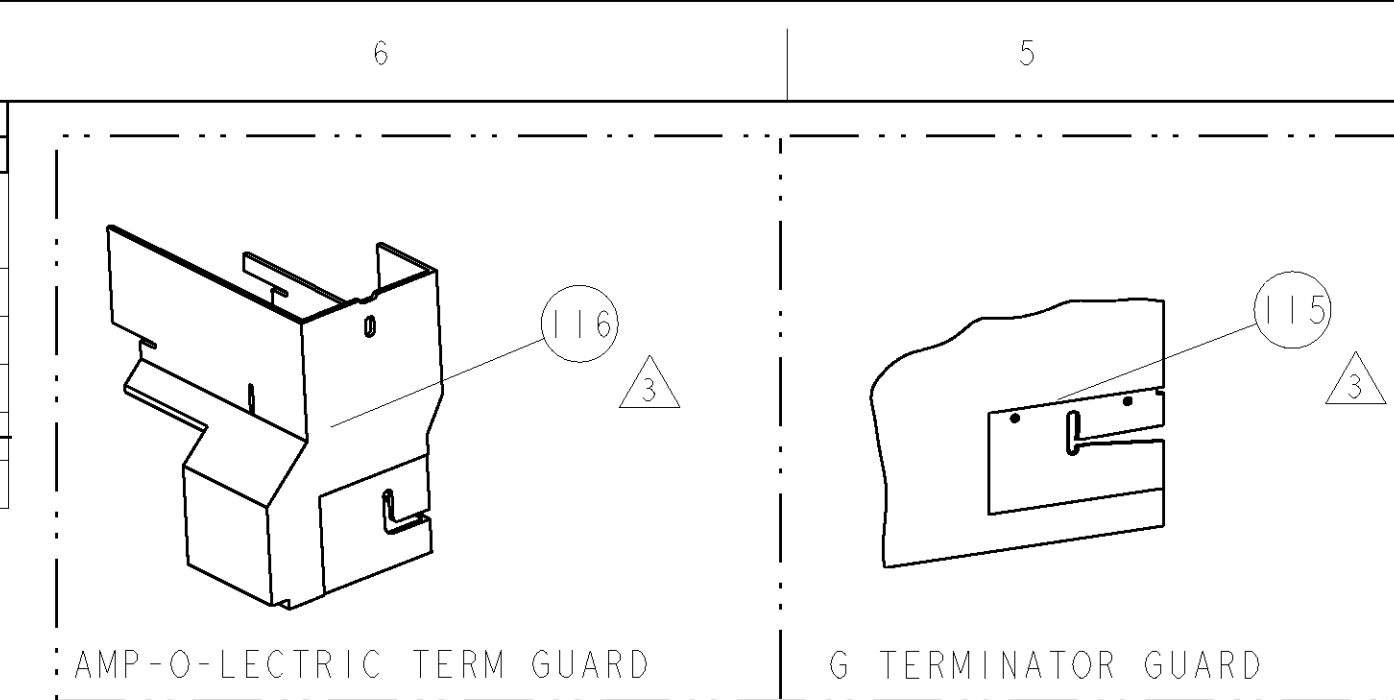

TERMINAL NAME: MEDIUM RING TERMINAL					
TE PN	MANUF PN	PACKARD TERM - PACKARD CRIMP SPECS			
1949180-1	12103513				
-	-	PAD LTR	CRIMP HEIGHT		WIRE SIZE
-	-	A	2.60±0.05mm[.102±.002]		3mm2
-	-	B	2.45±0.05mm[.097±.002]		2mm2
-	-	C	-		-
-	-	D	-		-
-	-	CRIMP	SIZE	TYPE	RANGE
-	-	WIRE	4.19mm [.165]	F	2.00-3.00 mm2
-	-	INSUL	5.00mm [.197]	F	Ø 3.7 mm MAX
WIRE STRIP LENGTH	TERM APPL SPEC	FEED	APPLICATOR INSTRUCTIONS		SET UP GAGE
4.90-5.28mm	NONE	13.89mm	408-8040		458637-1

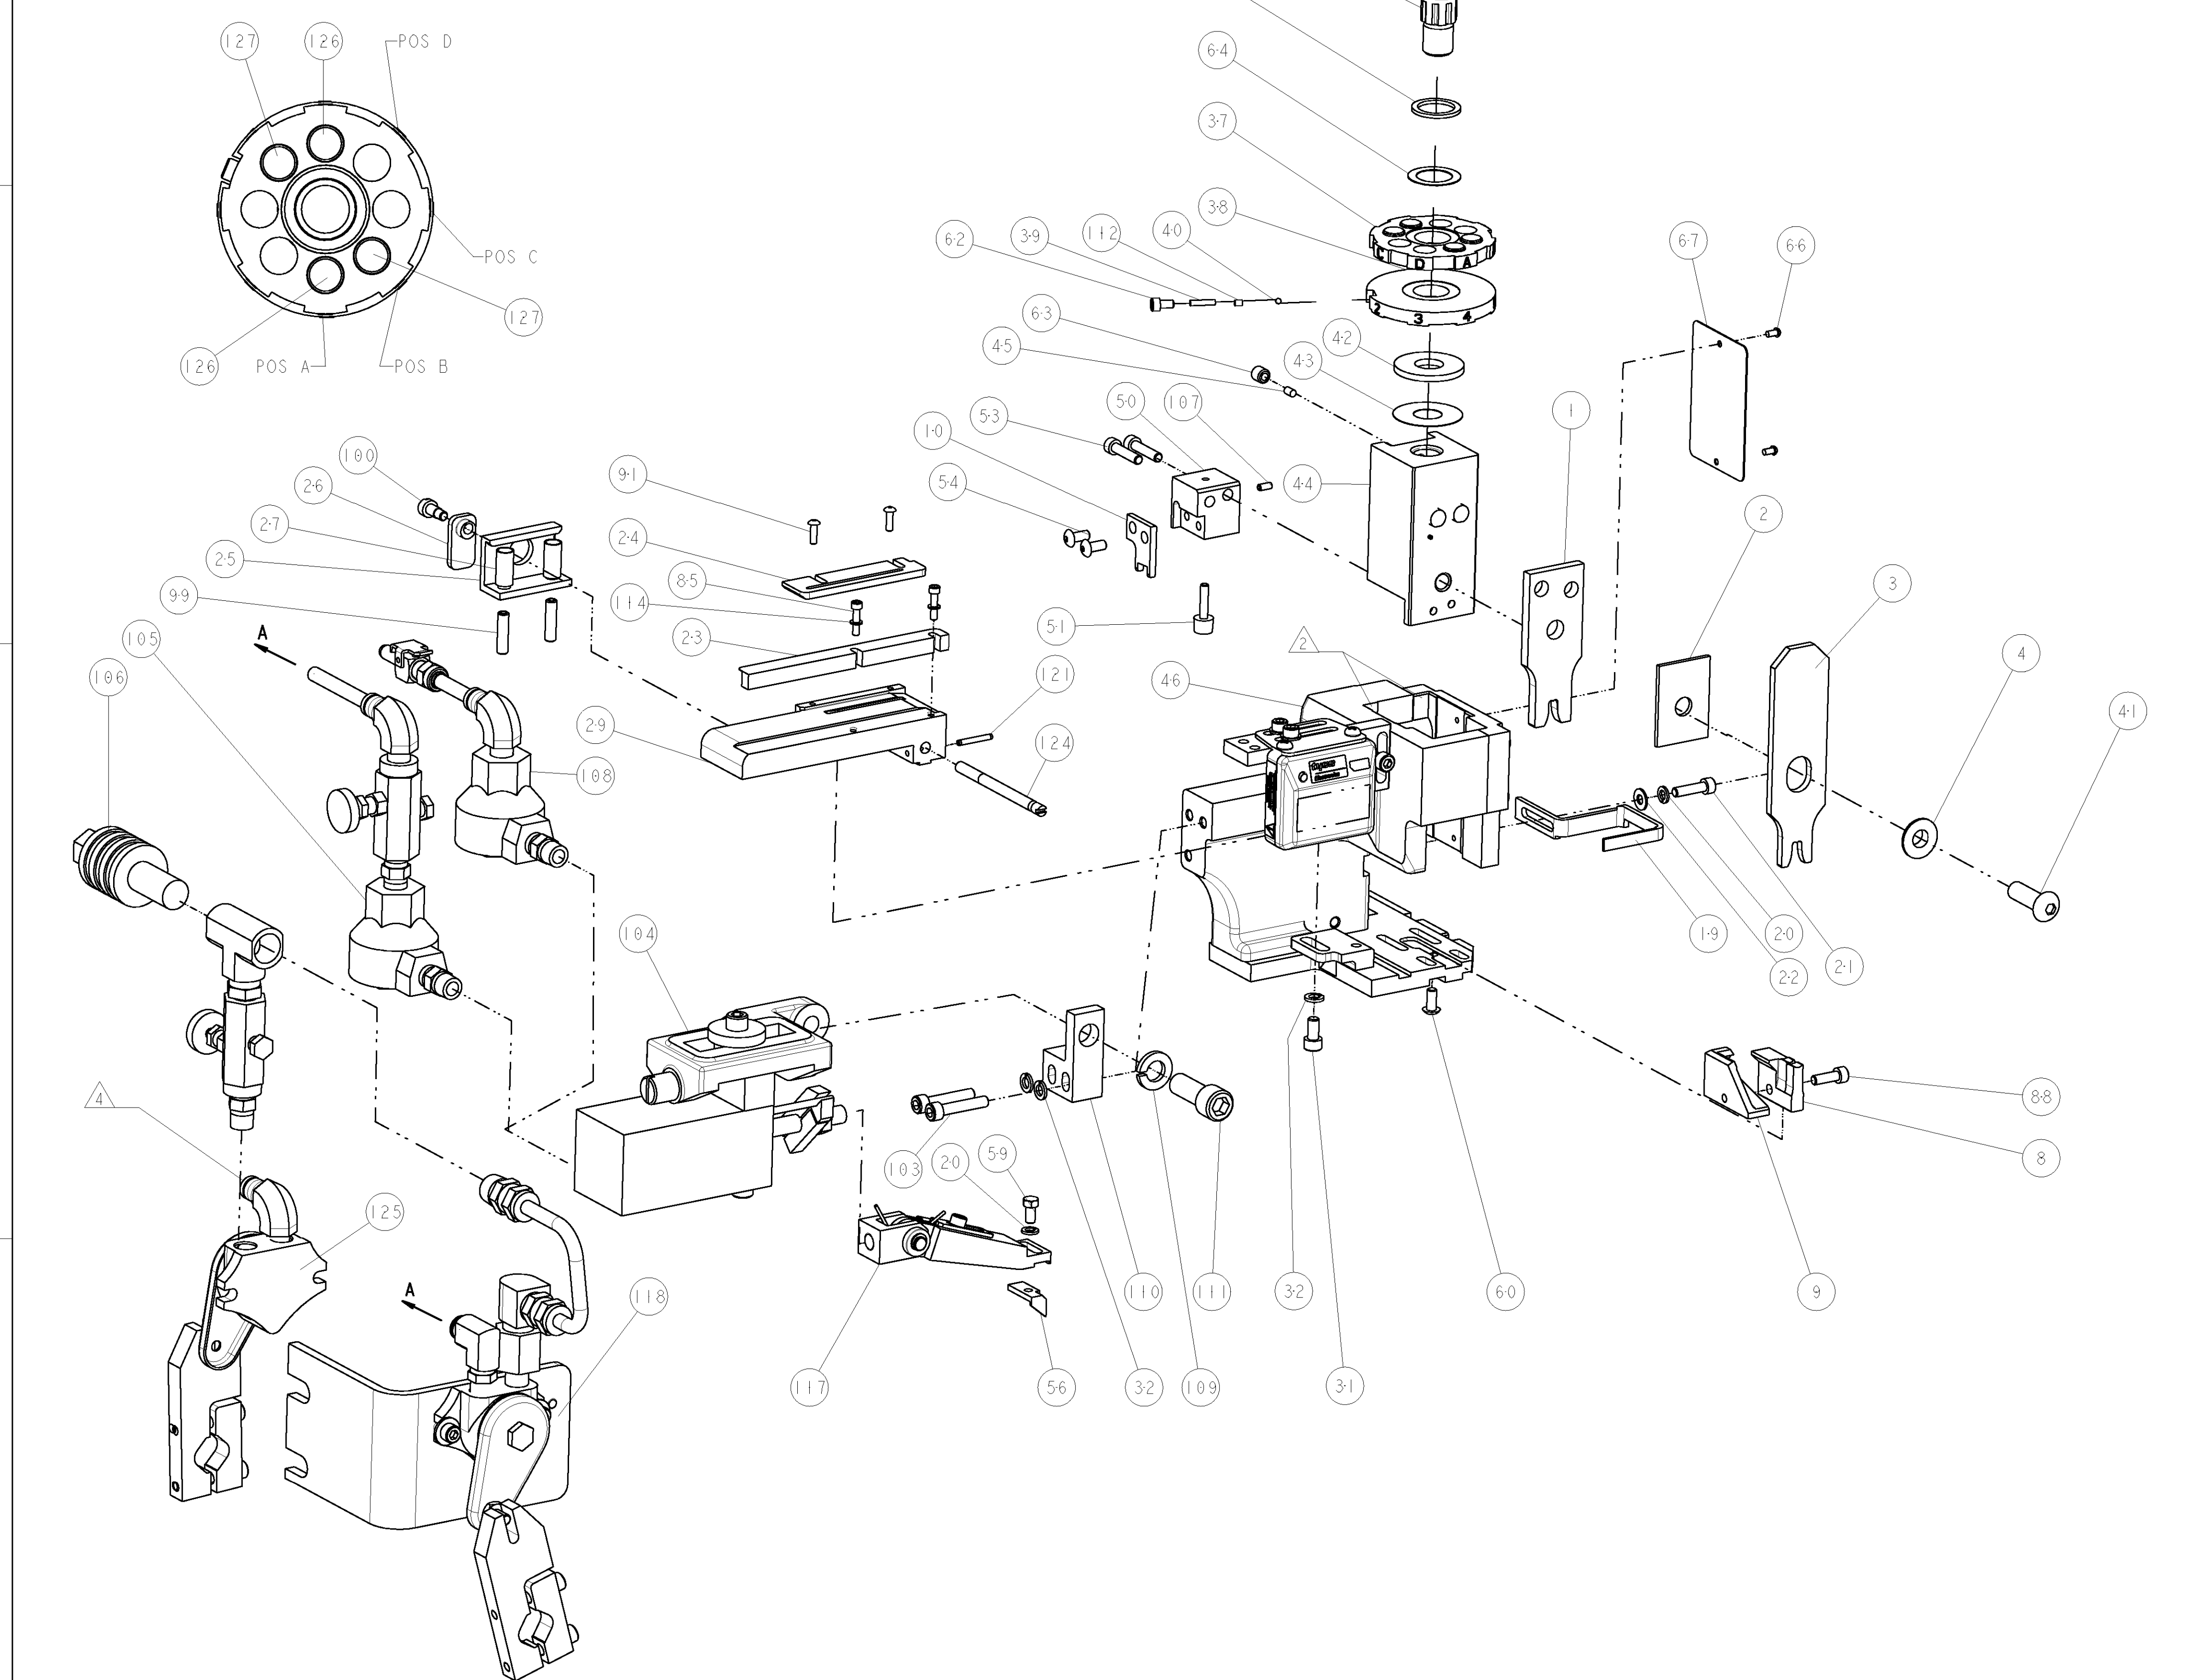

		2				1											
		LOC		DIST		REV		DATE		OWN		APVD					
		A		66		P		LTR		DESCRIPTION		DATE		OWN		APVD	
						C				ECR-08-000129		03JAN2008		MY		TE	
		</															

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1852348-1](#)