

930-001
Gasket for Flange Mount
Receptacle Connector

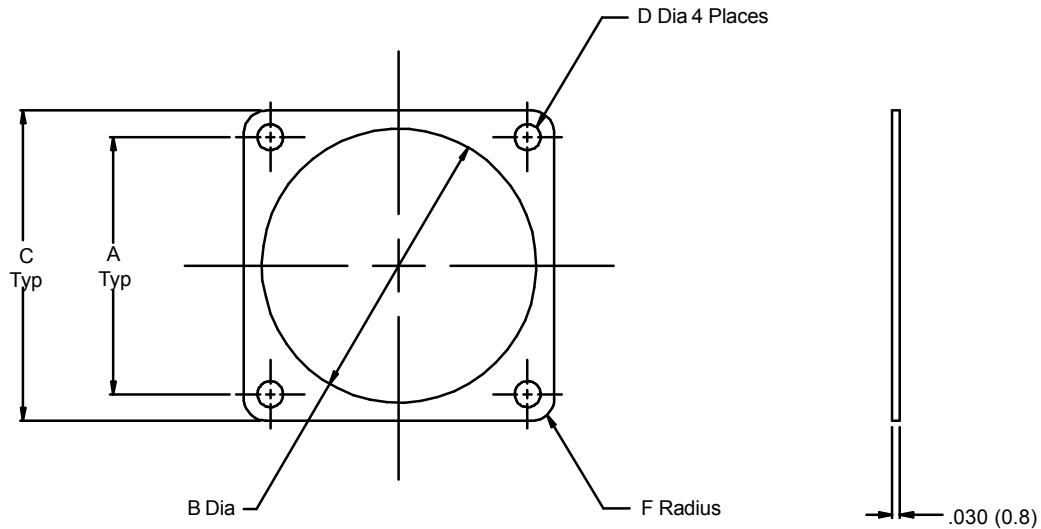
930 - 001 F 02

Product Series _____

Basic Number _____

Dash Number (Table I) _____

Material Symbol (Table II) _____

**NOTES:**

1. Identified by bag and tag in suitable quantities.
2. Metric dimensions (mm) are indicated in parentheses.

930-001
Gasket for Flange Mount
Receptacle Connector



Miscellaneous
Accessories

TABLE I: DASH NUMBER

MIL-DTL-26482, 26500, 83723 MIL-DTL-38999														
Dash	Series I & III	Series			A		B Dia		C		D Dia		F Rad	
No.	NAS1599 B&T	I & II	III & IV	AS81703	±.005	(0.1)	±.007	(0.2)	±.008	(0.2)	±.005	(0.1)	±.015	(0.4)
01	8	8	-	-	.595	(15.1)	.562	(14.3)	.812	(20.6)	.125	(3.2)	.105	(2.7)
02	-	-	-	3	.625	(15.9)	.603	(15.3)	.896	(22.8)	.125	(3.2)	.105	(2.7)
03	10	9 & 10	9	7	.719	(18.3)	.687	(17.4)	.937	(23.8)	.125	(3.2)	.105	(2.7)
04	12	11 & 12	10 & 11	-	.812	(20.6)	.772	(19.6)	1.031	(26.2)	.125	(3.2)	.105	(2.7)
05	-	-	-	12	.812	(20.6)	.828	(21.0)	1.114	(28.3)	.125	(3.2)	.105	(2.7)
06	14	13 & 14	12 & 13	19	.906	(23.0)	.937	(23.8)	1.125	(28.6)	.125	(3.2)	.105	(2.7)
07	16	15 & 16	14 & 15	27	.969	(24.6)	1.063	(27.0)	1.250	(31.8)	.125	(3.2)	.135	(3.4)
08	18	17 & 18	167 & 17	-	1.062	(27.0)	1.187	(30.1)	1.343	(34.1)	.125	(3.2)	.135	(3.4)
09	-	-	-	37	1.187	(30.1)	1.266	(32.2)	1.458	(37.0)	.125	(3.2)	.135	(3.4)
10	20	19 & 20	18 & 19	-	1.156	(29.4)	1.312	(33.3)	1.467	(37.3)	.125	(3.2)	.135	(3.4)
11	22	21 & 22	20 & 21	-	1.250	(31.8)	1.437	(36.5)	1.562	(39.7)	.125	(3.2)	.135	(3.4)
12	24	23 & 24	22 & 23	-	1.375	(34.9)	1.562	(39.7)	1.703	(43.3)	.152	(3.9)	.135	(3.4)
13	-	-	-	61	1.436	(36.5)	1.570	(39.9)	1.799	(45.7)	.125	(3.2)	.135	(3.4)
14	-	25	24 & 25	-	1.500	(38.1)	1.600	(40.6)	1.812	(46.0)	.152	(3.9)	.135	(3.4)

TABLE II: MATERIAL

Symbol	Material Description
B	Fluorosilicone with Silver Aluminum 84 Shore (Ref)
C	Conductive — Metex
F	Fluorosilicone
M	Conductive — Con-Sil II
N	Neoprene
S	Silicone
V	Viton

Metric Dimensions (mm) are indicated in parenthesis.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Glenair:

[930-001N04](#) [930-001N08](#) [930-001N11](#) [930-001B08](#) [930-001B10](#) [930-001C11](#) [930-001C12](#) [930-001B01](#) [930-001B03](#) [930-001B12](#) [930-001B15](#) [930-001C01](#) [930-001C03](#) [930-001C04](#) [930-001C06](#) [930-001C07](#) [930-001C08](#) [930-001C10](#) [930-001C14](#) [930-001F01](#) [930-001F03](#) [930-001F04](#) [930-001F06](#) [930-001F07](#) [930-001F08](#) [930-001F10](#) [930-001F11](#) [930-001F14](#) [930-001K01](#) [930-001K03](#) [930-001K04](#) [930-001K05](#) [930-001K06](#) [930-001K07](#) [930-001K08](#) [930-001K10](#) [930-001K11](#) [930-001K12](#) [930-001M03](#) [930-001M04](#) [930-001M07](#) [930-001M08](#) [930-001M11](#) [930-001M12](#) [930-001M14](#) [930-001N01](#) [930-001N02](#) [930-001N03](#) [930-001N06](#) [930-001N07](#) [930-001N10](#) [930-001N12](#) [930-001S01](#) [930-001S02](#) [930-001S03](#) [930-001S04](#) [930-001S05](#) [930-001S06](#) [930-001S07](#) [930-001S08](#) [930-001S10](#) [930-001S11](#) [930-001S12](#) [930-001S14](#) [930-001V01](#) [930-001V05](#) [930-001V06](#) [930-001V07](#) [930-001V08](#) [930-001V10](#) [930-001V12](#) [930-001V14](#) [930-001V11](#) [930-001B07](#) [930-001N14](#)