

FEATURES

60 MHz grade available (AD9928BBCZ-60)
 Registers similar to [AD9920A](#) and [AD9990](#)
 Timing generator with 18-channel V-driver
 Serial data output with reduced range LVDS interface
 1.8 V dual AFE core
 Internal LDO regulators for compatibility with 3 V systems
 Correlated double sampler (CDS) with -3 dB, 0 dB, $+3$ dB,
 and $+6$ dB gain
 6 dB to 42 dB, 10-bit variable gain amplifier (VGA)
 14-bit, 40 MHz analog-to-digital converter (ADC)
 Black level clamp with variable level control
Precision Timing core with ~ 390 ps resolution at 40 MHz
 On-chip 3 V horizontal and RG drivers
 General-purpose outputs (GPOs) for shutter support
 On-chip driver for external crystal
 128-ball CSP_BGA package, 9 mm $\times$ 9 mm, 0.65 mm pitch

APPLICATIONS

High speed digital imaging
 Surveillance cameras
 Industrial cameras

GENERAL DESCRIPTION

The [AD9928](#) is a highly integrated CCD signal processor for digital still-image camera applications. It includes a dual analog front end with analog-to-digital conversion, combined with a full-function, programmable timing generator and an 18-channel vertical driver (V-driver) for a 2-channel output CCD. The timing generator is capable of supporting up to 24 vertical clock signals internally, and the on-chip V-driver supports up to 18 high voltage outputs. A *Precision Timing*[®] core allows adjustment of high speed clocks with approximately 390 ps resolution at 40 MHz operation. The [AD9928](#) also contains seven general-purpose outputs, which can be used for shutter and system functions.

Each analog front end includes black level clamping, CDS, VGA, and a 14-bit ADC. The timing generator provides all the necessary CCD clocks: RG, H-clocks, V-clocks, sensor gate pulses, substrate clock, and substrate bias control.

The [AD9928](#) is specified over an operating temperature range of -25°C to $+85^{\circ}\text{C}$.

FUNCTIONAL BLOCK DIAGRAM

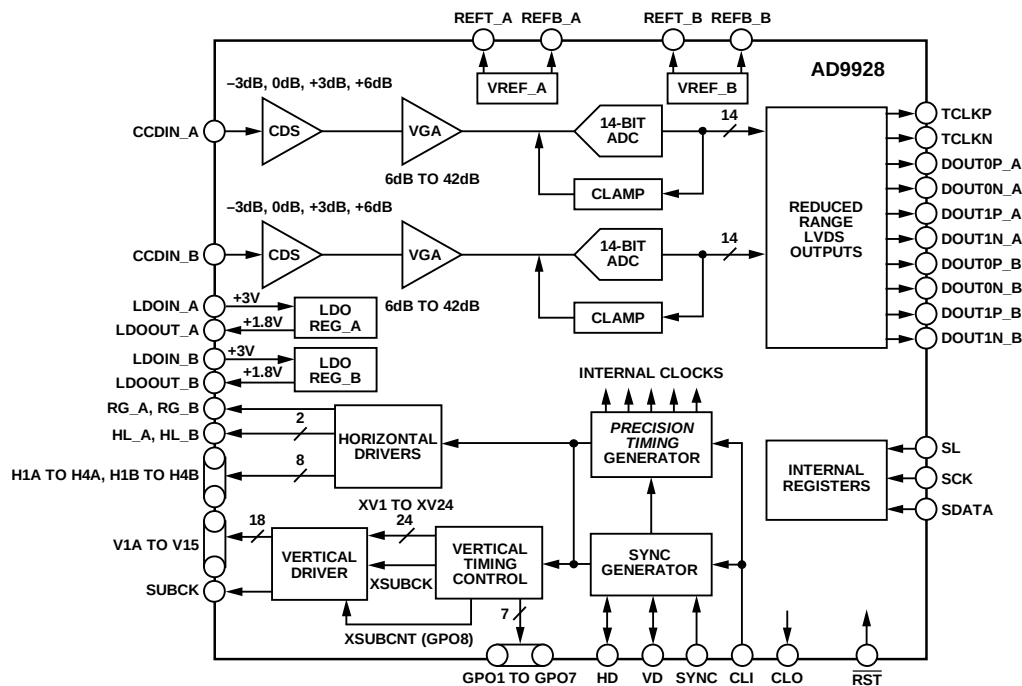


Figure 1.

For more information on the [AD9928](#), email Analog Devices, Inc., at afe.ccd@analog.com.

Rev. SpH

Document Feedback

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106, U.S.A.
 Tel: 781.329.4700 ©2009–2013 Analog Devices, Inc. All rights reserved.
 Technical Support www.analog.com

NOTES

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com