


## MABA-000001-50KIT1 Designer's Kit



### Delivering designer's kits...

transformers ranging from 1 to 3000 MHz

#### Features:

- Very wide bandwidth
- Termination finish, both gold over nickel plated and tin plated
- Various surface mount parts
- Aqueous washable
- RoHS compliant


### Competitive pricing - Call for quotes

Each kit contains 15 models, 10 of each, 150 total

#### MABA-000001-50KIT1 Electrical Specifications of each model

| Part Number        | $\Omega$ Ratio | Specified Freq (MHz) | Insertion Loss |           |          | Configuration |
|--------------------|----------------|----------------------|----------------|-----------|----------|---------------|
|                    |                |                      | 3 dB MHz       | 2 dB MHz  | 1 dB MHz |               |
| MABA-009180-500MHZ | 1:1            | 3-500                | 0.40-500       | 0.50-300  | 1-100    | D             |
| ETC1-1-6TR         | 1:1            | 760-960              | -              | 760-960   | -        | C             |
| ETC1-1-10TR        | 1:1            | 1710-1910            | -              | 1710-1910 | -        | B             |
| MABA-009602-ES2922 | 1:1            | 5-1200               | -              | 600-1200  | 5-600    | C             |
| MABA-007159-000000 | 1:1            | 4.5-3000             | 2000-2800      | 1000-2000 | 4.5-1000 | A             |
| MABA-010125-TC1113 | 1:1            | 4.5-3000             | 2000-3000      | 1000-2000 | 4.5-1000 | A             |
| MABA-009250-CT0068 | 1:2            | 1-350                | -              | -         | 3-300    | D             |
| MABA-009484-ETC31T | 1:3            | 2-500                | -              | -         | 2-500    | D             |
| MABAES0061         | 1:4            | 3-800                | 2-800          | 5-600     | 10-100   | D             |
| MABA-009711-ETK2MM | 1:4            | 2-1000               | 700-1000       | 500-700   | 3-500    | E             |
| MABA-008639-TC41T7 | 1:4            | 6-1000               | 600-1000       | 6-600     | -        | E             |
| MABA-007236-C16423 | 1:4            | 500-2500             | 500-3000       | -         | 750-1200 | E             |
| MABA-010143-FLUX18 | 1:8            | 2-500                | -              | 2-500     | -        | D             |
| ETC9-1T-5TR        | 1:9            | 10-75                | -              | 10-75     | -        | D             |
| ETC16-1T-2TR       | 1:16           | 5-40                 | -              | -         | 5-40     | D             |

#### Configurations:

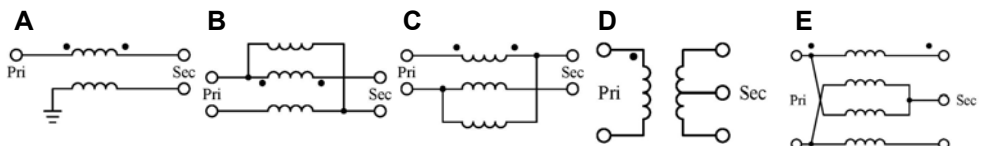

M/A-COM Technology Solutions Inc.

Lowell, Massachusetts 01851

- North America 800.366.2266
- Europe +353.21.244.6400
- India +91.80.43537383
- China +86.21.2407.1588

[www.macomtech.com](http://www.macomtech.com)

**The First Name in Microwave**

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

MACOM:

[MABA-000001-50KIT1](#)