Interface Module

Interface module for Plug-in connector acc. to IEC 60603-1 / DIN 41651

Data sheet

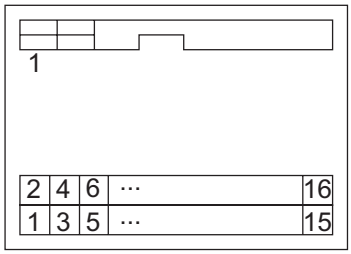

Description

	No. of poles	Dimensions "L"	Item-No.	Pack.-unit pcs
Interface module	10	35 mm / 1.38 in	289-611	1
with male connector	14	40 mm / 1.57 in	289-612	1
	16	45 mm / 1.77 in	289-613	1

Interface module with male connector for female connector with IDC acc. to DIN 41651 part 1 and 2.
Short and long latches for the female connector, with and witout strain relief, are shipped lose.

- Mounting carrier for DIN 35 rail with lateral marking system.
- Marking with the WMB multi marking system or with marking strips with cover.

Technical Data

Operating voltage	AC/DC 125 V
Nominal current	1 A
Connector contact	Phosphor-bronze 0.38 µm Au selectively over 1.3 µm Ni
Performance level	3
Nominal voltage acc. to VDE 0110/1.89	125 V / 0.8 kV / 2
Dimensions incl. mounting carrier (LxWxH)	(Lx85x48*) mm (Lx3.35x1.89*) in * from upper edge of DIN 35 rail
Wire connection	CAGE CLAMP® terminal strips (WAGO series 736) 0.08-2.5 mm² / AWG 28-12 ** ** AWG12: THHN, THWN
Stripped length	5-6 mm / 0.22 in
Mating direction	vertical
Ambient operating temperature	-20 °C...+55 °C
Storage temperature	-40 °C...+70 °C
Standards / prescriptions	IEC 60603-1 / DIN 41651 Part 1 and 2

WAGO Kontakttechnik GmbH & Co. KG Postfach 2880 • D-32385 Minden
Hansastr. 27 • D-32423 Minden
Tel.: 05 71 / 8 87-0 E-Mail: info@wago.com
Fax.: 05 71 / 8 87-169 Web: http://www.wago.com