
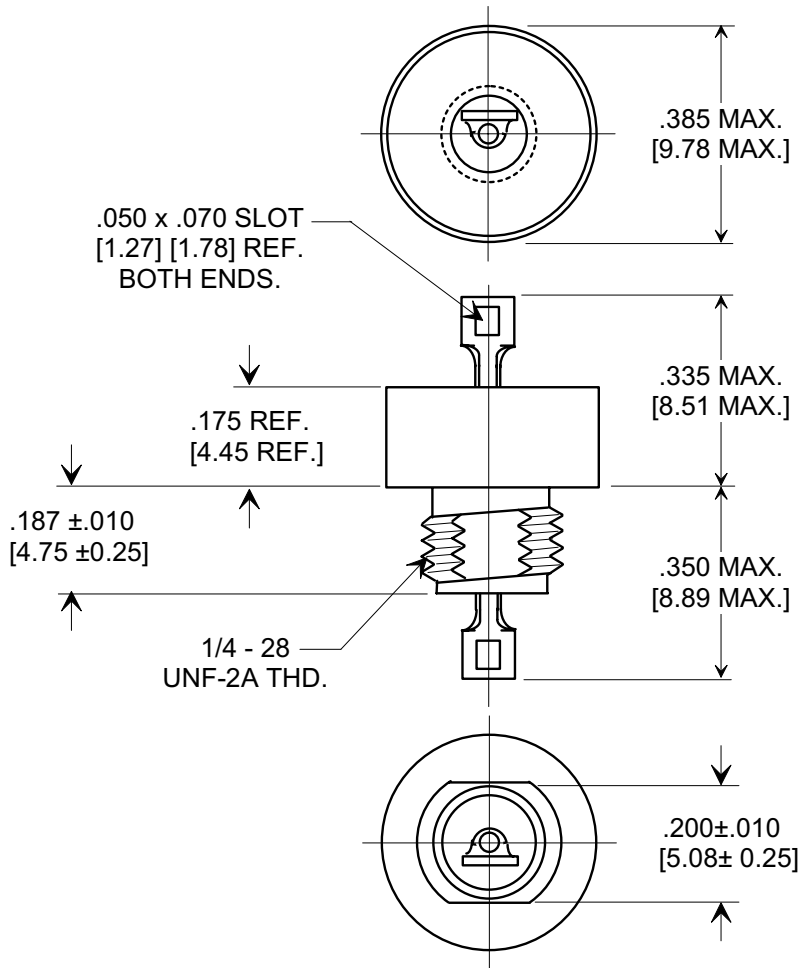





MARKETING SALES DRAWING

DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - []

Electrical Testing
 per Tusonix standard
 test plans and Mil-Std-202
 Test Methods.



MOUNTING HARDWARE

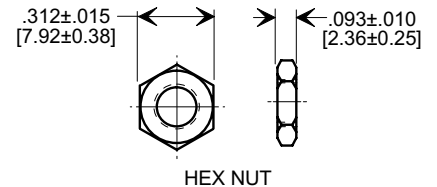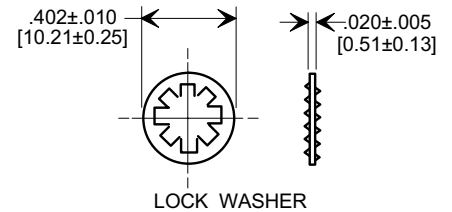

NOTES:

- MATERIALS:
 BUSHING - TIN PLATED STEEL
 LEAD - SOLDER PLATED COPPER
 NUT - TIN PLATED BRASS
 L'WASHER - TIN PLATED PHOSPHOR BRONZE
- MOUNTING TORQUE: 8 lb - ins. max
 SEAL TESTED PER MIL-STD-202
 METHOD 112 CONDITION A.
- DCR - .01Ω max.
- MAX. SOLDER TEMPERATURE 500°F

MIN. CAP. (μF)	WORKING VOLTAGE DC		CURRENT	IR (MIN.) @ 100 VDC	DWW	MINIMUM NO LOAD INSERTION LOSS (dB) AT 25°C PER MIL-STD-220					
	+85°C	+125°C				30 KHz	100 KHz	300 KHz	1 MHz	10 MHz	1 GHz
1.4	100	70	15 A	500 M Ω	300 VDC	15	25	34	44	60	70

X-2015 Rev-0 REVISION RECORD Original Release C.O. 6769 METRIC DIM'S & NOTES ADDED. E.C. 7-17-92 6789 WVDC REVISED 100 & 70 WERE 80 & 50. L.E. 10-26-92 6992 RDN TO COMP FMP. STYLE DWG SPLIT FOR EACH VAR. S.M. 06-19-02 20020604-3-07 NOTE 1 LEAD WAS SILVER. S.M. 02-02-04 20040202-2-01	0	--TOLERANCES-- Unless Otherwise Specified DECIMAL ± // // ANGLES ± // // TUSONIX TUCSON, ARIZONA	Title " C " TYPE COAXIAL BROADBAND FILTER - HERMETICALLY SEALED	
	1		Drawn S.M. 06-19-02	Scale X 3
	2		Approved J.Mc 06-19-02	
	3			
	4			

A **4601-000**

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype [ameyasales1](#) [ameyasales2](#)

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com