


LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD		
HM	00	K	REV: ECO-14-011315	25JULY2014	GG	LS	

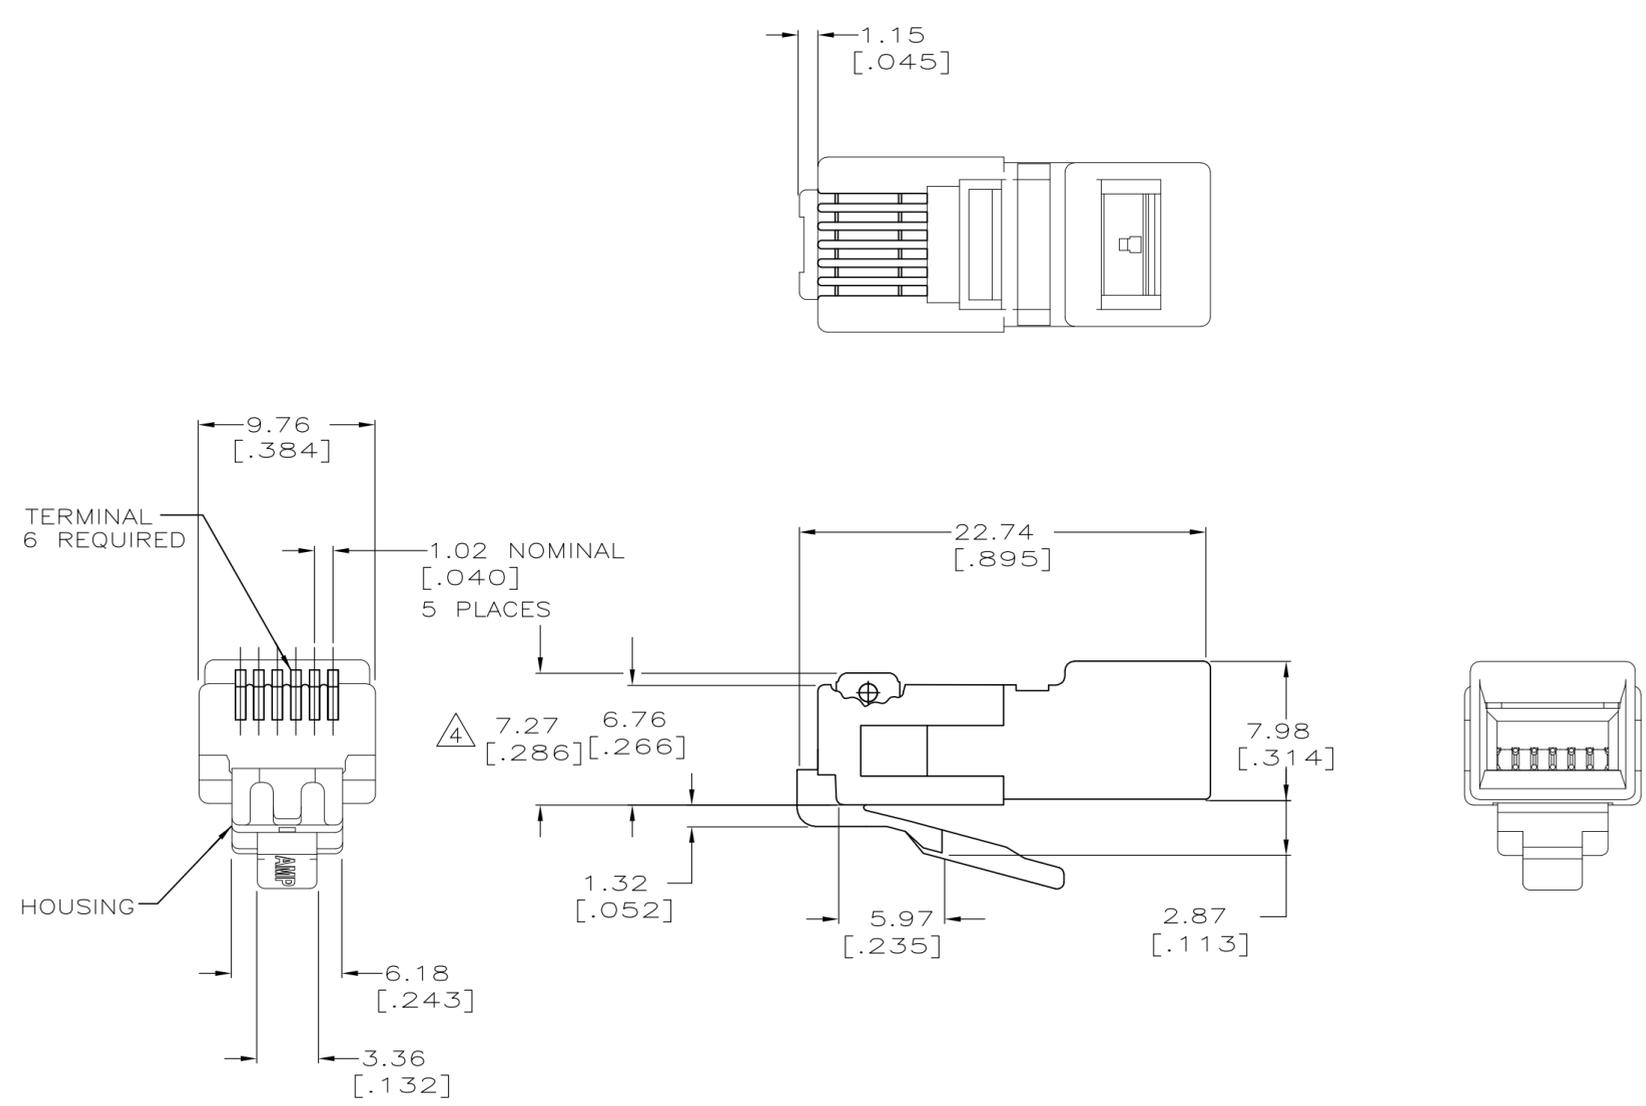

- ① DIMENSIONS ARE MAXIMUM UNLESS OTHERWISE SPECIFIED.
- ② MATERIAL: HOUSING— POLYCARBONATE, CLEAR
 TERMINAL— .36 [.014] THICK PHOSPHOR BRONZE PLATED WITH .178 μ m [.000007] THICK GOLD IN LOCALIZED PLATE AREA OVER .762 μ m [.000030] THICK PALLADIUM NICKEL IN LOCALIZED PLATE AREA OVER 2.54 μ m [.000100] THICK NICKEL ON ENTIRE CONTACT.
- 3. PLUG WILL ACCEPT 24 OR 26 AWG SOLID WIRE, ϕ 0.99 [.039] MAXIMUM INSULATION DIAMETER, WITH A 4.96 [.195] DIAMETER MAXIMUM JACKET.
- ④ TERMINATED DIMENSION 6.15 [.242] MAXIMUM.

- ⑦ 500 ASSEMBLIES PER PACKAGE.
- ⑧ 100 ASSEMBLIES PER PACKAGE.

⑧	5-555426-3
⑦	5-555426-2
PACKAGED	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. SIMPSON 11-10-93	Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: mm (INCHES)		CHK C. WHITT 11-18-93	NAME LAURER/MCGRATH	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD 11-23-93	PRODUCT SPEC 108-1163	
0 PLC ± -		APPLICATION SPEC 114-6016		
1 PLC ± - ①		WEIGHT -		
2 PLC ± -		SIZE A2		
3 PLC ± -		CAGE CODE 00779		
4 PLC ± -		DRAWING NO 555426		
ANGLES ± -		RESTRICTED TO -		
FINISH ②		CUSTOMER DRAWING		
		SCALE 4:1		SHEET 1 OF 1
				REV K

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5-555426-3](#)