Glenair®

AS85049/76
90° EMI/RFI Environmental Backshell

B

CONNECTOR DESIGNATOR:

F	**MIL-DTL-38999 Series I and II**

Finish

N = *Electroless Nickel*
W = *1,000 Hr. Cadmium Olive Drab over Electroless Nickel*
X = *Aluminum, Nickel Flurocarbon Polymer*
Z = *Aluminum, Zinc-Nickel, Black*

M85049/76	**- 10**	**W**	**01**

Basic Part Number

Dash Number *(Table I)*

Clamp Size *(Tables II & III)*

TABLE I: Shell Size, Thread and Dimensions

Dash No.	Shell Size Series I	Shell Size Series II	A Thread Class 2B	C Dia Max
08	09	08	.438 - 28 UNEF	.750 (19.1)
10	11	10	.562 - 24 UNEF	.850 (21.6)
12	13	12	.688 - 24 UNEF	1.000 (25.4)
14	15	14	.813 - 20 UNEF	1.150 (29.2)
16	17	16	.938 - 20 UNEF	1.250 (31.8)
18	19	18	1.063 - 18 UNEF	1.400 (35.6)
20	21	20	1.188 - 18 UNEF	1.550 (39.4)
22	23	22	1.313 - 18 UNEF	1.650 (41.9)
24	25	24	1.438 - 18 UNEF	1.850 (47.0)

TABLE II: Shell Size, Series 1 Reference, Clamp Size and Dimensions

Dash No.	Shell Size Series I	Shell Size Series II	Clamp Size Min	Clamp Size Max	E ± .156 (4.0)	F ± .188 (4.8)
08	09	08	01	02	.532 (13.5)	3.267 (83.0)
10	11	10	01	03	.627 (15.9)	3.387 (86.0)
12	13	12	02	04	.642 (16.3)	3.407 (86.5)
14	15	14	02	05	.719 (18.3)	3.477 (88.3)
16	17	16	02	06	.774 (19.7)	3.567 (90.6)
18	19	18	03	07	.854 (21.7)	3.737 (94.9)
20	21	20	03	08	.899 (22.8)	3.737 (94.9)
22	23	22	03	09	1.009 (25.6)	3.847 (97.7)
24	25	24	04	10	1.024 (26.0)	3.847 (97.7)

A Thread

E

C Dia

F

Cable Range

G

APPLICATION NOTES

1. For complete dimensions see the applicable Military Specification.
2. Metric dimensions (mm) are in parentheses.
3. Cable Range is defined as the accommodation range for the wire bundle or cable. Dimensions shown are not intended for inspection criteria.
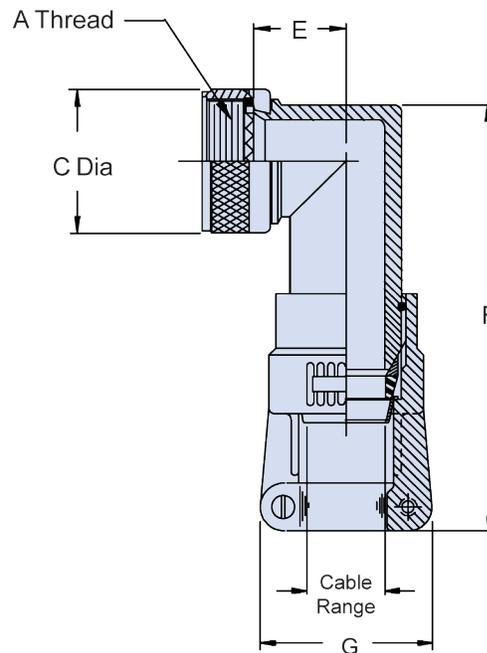
TABLE III: Clamp Size, Cable Range and Dimensions

Clamp Size	Cable Range Min	Cable Range Max	G Max
01	.062 (1.6)	.125 (3.2)	.800 (20.3)
02	.125 (3.2)	.250 (6.4)	1.000 (25.4)
03	.250 (6.4)	.375 (9.5)	1.100 (27.9)
04	.375 (9.5)	.500 (12.7)	1.200 (30.5)
05	.500 (12.7)	.625 (15.9)	1.250 (31.8)
06	.625 (15.9)	.750 (19.1)	1.400 (35.6)
07	.750 (19.1)	.875 (22.2)	1.500 (38.1)
08	.875 (22.2)	1.000 (25.4)	1.650 (41.9)
09	1.000 (25.4)	1.125 (28.6)	1.750 (44.5)
10	1.125 (28.6)	1.250 (31.8)	1.900 (48.3)

Dimensions in inches (millimeters) and are subject to change without notice.

U.S. CAGE Code 06324

Printed in U.S.A.

GLENAIR, INC. • **1211 AIR WAY** • **GLENDALE, CA 91201-2497** • **818-247-6000** • FAX 818-500-9912
www.glenair.com
B-90
E-Mail: sales@glenair.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Glenair](#):

M85049/76-14W05 M85049/76-10W03 M85049/76-16W03 M85049/76-16W05 M85049/76-10W02 M85049/76-12W03 M85049/76-12W04 M85049/76-16N06 M85049/76-22W04 M85049/76-20W04 M85049/76-20W06 M85049/76-22N08 M85049/76-22W08 M85049/76-24N06 M85049/76-24W10 M85049/76-18W03 M85049/76-18W07 M85049/76-24N04 M85049/76-14N05 M85049/76-18N05 M85049/76-18W04 M85049/76-20N05 M85049/76-20N08 M85049/76-22W07 M85049/76-22N05 M85049/76-22N06 M85049/76-22N07 M85049/76-12N04 M85049/76-12W02 M85049/76-14N04 M85049/76-24W04 M85049/76-08N02 M85049/76-10W01 M85049/76-16N03 M85049/76-16W04 M85049/76-20N06 M85049/76-16W06 M85049/76-18N03 M85049/76-20N03 M85049/76-20N04 M85049/76-20W03 M85049/76-24N05 M85049/76-24N09 M85049/76-08N01 M85049/76-08W02 M85049/76-10N03 M85049/76-12N02 M85049/76-14N02 M85049/76-24W09 M85049/76-14N03 M85049/76-18N04 M85049/76-18N06 M85049/76-22N04 M85049/76-22N09 M85049/76-18N07 M85049/76-18W06 M85049/76-20W08 M85049/76-22W09 M85049/76-24N08 M85049/76-24W08 M85049/76-22N03 M85049/76-24W05 M85049/76-08W01 M85049/76-10N02 M85049/76-12N03 M85049/76-16N02 M85049/76-24N10 M85049/76-14W04 M85049/76-16N04 M85049/76-16W02 M85049/76-18W05 M85049/76-20N07 M85049/76-16N05 M85049/76-20W05 M85049/76-20W07 M85049/76-22W03 M85049/76-22W05 M85049/76-22W06 M85049/76-24N07 M85049/76-24W06 M85049/76-24W07 M85049/76-10N01 M85049/76-14W02 M85049/76-14W03