

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [95043-2895](#)
Status: **Active**
Overview: [Modular Plugs - Jacks](#)
Description: [Modular Plug, Short Body, Shielded, 8/8, Yellow Boot, Cat5](#)

Documents:

[3D Model](#) [Application Specification AS-95043 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)
[Product Specification PS-95043 \(PDF\)](#)

Agency Certification

CSA LR19980
UL E107635

General


Product Family Modular Jacks/Plugs
Series [95043](#)
Comments Colored Boot[Cable to Plug Tensile Strength: 98.0N
Component Type Wire Plug
Magnetic No
Overview [Modular Plugs - Jacks](#)
Performance Category 5, 5e
Power over Ethernet (PoE) N/A
Product Name RJ45
UPC 800754225823

Physical

Boot Color Yellow
Color - Resin Clear
Durability (mating cycles max) 750
Flammability 94V-2
Inverted / Top Latch N/A
Jack Height N/A
Lightpipes/LEDs None
Material - Metal Copper Alloy, Phosphor Bronze
Material - Plating Mating Gold
Material - Plating Termination Tin
Material - Resin Polycarbonate
Net Weight 3.080/g
Orientation N/A
PCB Locator No
PCB Retention None
Packaging Type Bag
Pitch - Mating Interface 1.02mm
Plating min - Mating 0.305µm
Plating min - Termination 1.270µm
Ports 1
Positions / Loaded Contacts 8/8
Surface Mount Compatible (SMC) N/A
Temperature Range - Operating -40°C to +60°C
Termination Interface: Style IDT or Pierce
Waterproof / Dustproof No
Wire/Cable Type Round

Electrical

Current - Maximum per Contact 1.5A

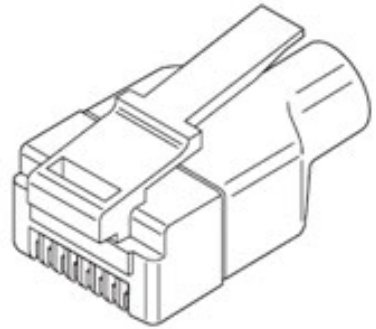

Series

image - Reference only

EU RoHS

**ELV and RoHS
Compliant**

REACH SVHC

Not Reviewed

Low-Halogen Status

Not Reviewed

China RoHS



**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of
Compliance, [click here](#)

Please visit the [Contact Us](#) section for any
non-product compliance questions.

Search Parts in this Series

[95043Series](#)

Mates With

FCC 68 Jacks

Application Tooling | FAQ

*Tooling specifications and manuals are
found by selecting the products below.
Crimp Height Specifications are then
contained in the Application Tooling
Specification document.*

Global

Description	Product #
Termination Machine, Modular Plug	0623001400
Parallel Action Handtool for Shielded Plug, Cat 5, 8/8 Circuit, Short Body	0690081100

Grounding to Panel	N/A
Shielded	Yes
Voltage - Maximum	125V AC (RMS)/DC

Material Info

Reference - Drawing Numbers

Application Specification	AS-95043
Product Specification	PS-95043
Sales Drawing	SDA-95043

This document was generated on 12/12/2014

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Molex:

95043-2895