


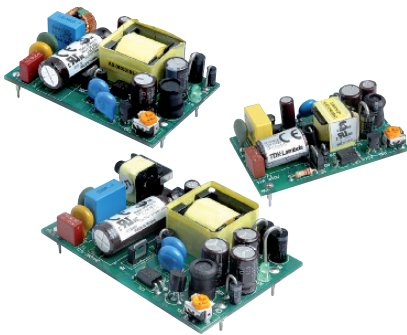

KPSA Series

5 to 15W AC-DC

Board Mount Power Supplies

- Small Size & Lightweight
- PCB Board Mountable
- Low Cost
- Universal Input Voltage
- RoHS Compliant

Key Market Segments & Applications

Factory Automation
Telecom
Datacom
Printers and motor drives
Instruments

KPSA Features and Benefits

Features

- Small Size
- Wide Input Range
- No External Components Needed

Benefits

- Minimises PCB Space
- Global use with no manual intervention
- Easy to use

Specifications

MODEL		KPSA-5	KPSA-10	KPSA-15
ITEMS				
Input Voltage range	-	85 - 264VAC (47 - 63Hz) or 100 - 370VDC		
Inrush Current (115 / 230VAC)	A	30A Max at 230VAC		
Input Current	A	0.13 / 0.07	0.27 / 0.13	0.4 / 0.2
Temperature Coefficient	-	±0.05%/°C		
Voltage Accuracy	-	±1%		
Minimum Load	A	None		
Load Regulation	-	±1% (10% to 100% load)		
Line Regulation (1)	-	±0.5%		
Ripple & Noise (2)	mV	1% or 50mV whichever is greater		
Short Circuit Protection	-	Continuous - hiccup mode		
Overvoltage Protection	V	130-150%		
Hold Up Time (Typ@115VAC)	ms	19	16	16
LED Indicator	-	Green LED = OK		
Operating Temperature	°C	0 to +70 with derating		
Storage Temperature	°C	-20 to +85		
Humidity (non condensing)	%RH	10 - 95		
Cooling	-	Convection		
Withstand Voltage	-	Input to Output 3kVAC		
Vibration (non operating)	-	23.52m/s² (10 - 55Hz: constant sweep 1 min X, Y, Z for 1 hour)		
Shock	-	< 196.1 m/s² (20G)		
Safety Agency Approvals	-	UL60950-1, CSA60950-1, EN60950-1 Class II, CE Mark		
Conducted & Radiated EMI	-	EN55022-B, FCC Class B		
Immunity	-	EN61000-4 -2, -3, -4, -5, -6		
Weight (Typ)	g	28	40	48
Size (WxLxH; H above pcb)	mm	55 X 33 X 21	61 X 40 X 20	70 X 45 X 20
Warranty	yrs	2		

Notes:


(1) KPSA-5 Measured from 100 - 240VAC

(2) Measured with 0.1µF ceramic & 10µF electrolytic at 20MHz BW


Model Selector

Model	Output Voltage (V)	Maximum Output (A)	Peak Load (A)	Output Pwr (W)	Eff (typ)%
KPSA5-3R3	3.3	1.25	-	4.1	70
KPSA5-5	5.0	1.00	-	5.0	70
KPSA5-12	12.0	0.42	-	5.0	70
KPSA5-15	15.0	0.33	-	5.0	70
KPSA5-24	24.0	0.23	-	5.5	77
KPSA10-3R3	3.3	2.50	3.80	8.3	65
KPSA10-5	5.0	2.00	2.80	10.0	70
KPSA10-12	12.0	0.84	1.20	10.1	75
KPSA10-15	15.0	0.67	1.00	10.1	75
KPSA10-24	24.0	0.42	0.65	10.1	78
KPSA15-3R3	3.3	3.00	4.50	9.9	70
KPSA15-5	5.0	3.00	4.50	15.0	73
KPSA15-12	12.0	1.25	1.80	15.0	80
KPSA15-15	15.0	1.00	1.50	15.0	80
KPSA15-24	24.0	0.63	0.95	15.1	82

Derating Curve KPSA Series

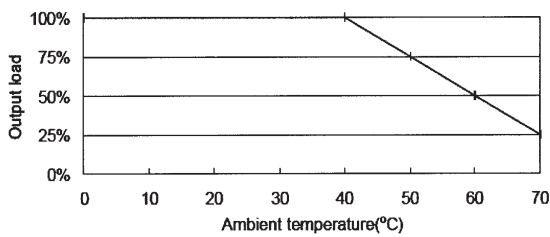


Outline Drawing KPSA5 Series

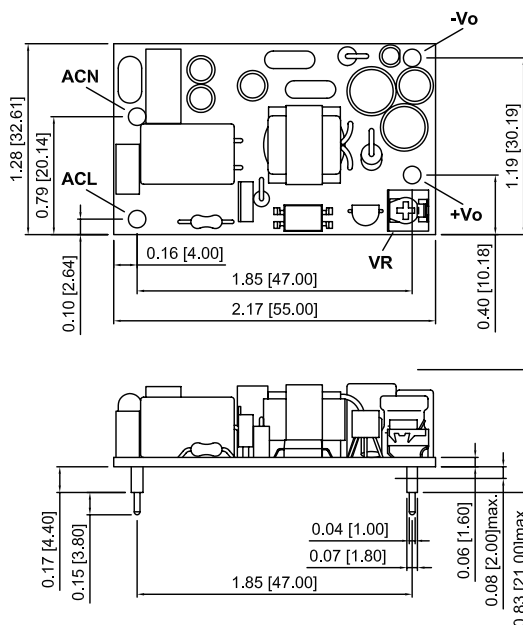


All Dimensions are in inches[mm]
Tolerances: .XX±.02[.X±.5] unless otherwise noted

Outline Drawing KPSA10 Series

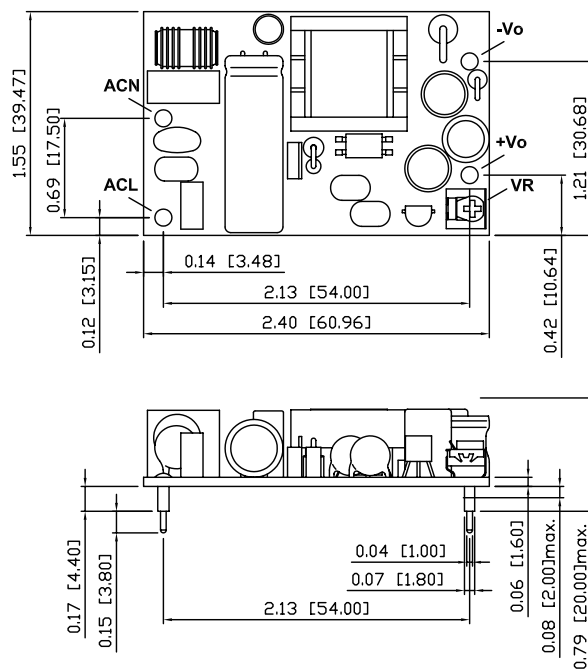

Note: All Dimensions are in inches (mm)
Tolerances: $XX \pm 0.2$ ($.X \pm .5$) unless
otherwise noted

Outline Drawing KPSA15 Series

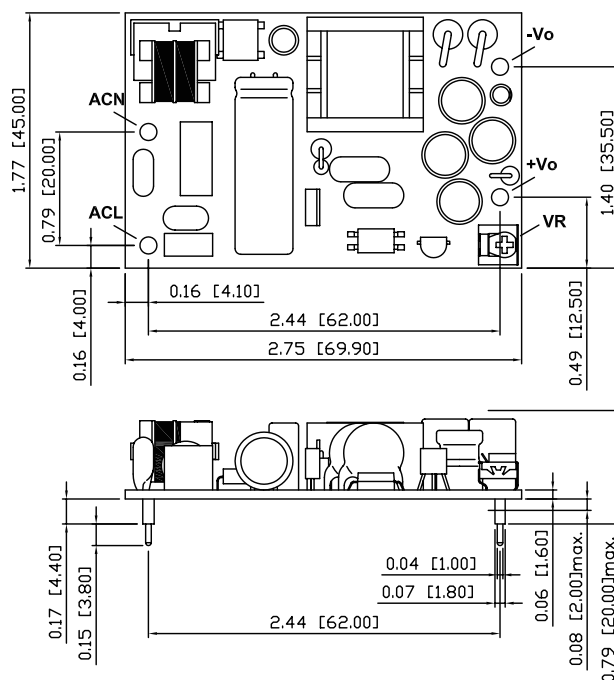

Note: All Dimensions are in inches
(mm) Tolerances: $XX \pm 0.2$ ($.X \pm .5$)
unless otherwise noted

**INTERMEDIATE VOLTAGES AVAILABLE
PLEASE CONSULT SALES**

TDK-LAMBDA EMEA

www.emea.tdk-lambda.com



TDK-Lambda France SAS

Route de Grivery
ZAC des Delaches
CS 41077
91978 Courtaboeuf Cedex
France
Tel: +33 1 60 12 71 65
Fax: +33 1 60 12 71 66
france@fr.tdk-lambda.com
www.fr.tdk-lambda.com



Italy Sales Office
Via dei Lavoratori 128/130
20092 Cinisello Balsamo (MI)
Italy
Tel: +39 02 61 29 38 63
Fax: +39 02 61 29 09 00
info.italia@it.tdk-lambda.com
www.it.tdk-lambda.com



TDK-Lambda Germany GmbH

Karl-Bold-Strasse 40
77855 Achern
Germany
Tel: +49 7841 666 0
Fax: +49 7841 5000
info.germany@de.tdk-lambda.com
www.de.tdk-lambda.com



Austria Sales Office
Aredstrasse 22
2544 Leobersdorf
Austria
Tel: +43 2256 655 84
Fax: +43 2256 645 12
info.germany@de.tdk-lambda.com
www.de.tdk-lambda.com



TDK-Lambda UK Ltd.

Kingsley Avenue
Ilfracombe
Devon EX34 8ES
United Kingdom
Tel: +44 (0) 12 71 85 66 66
Fax: +44 (0) 12 71 86 48 94
powersolutions@uk.tdk-lambda.com
www.uk.tdk-lambda.com



Nemic Lambda Ltd.

Kibbutz
Givat Hashlosha 48800
Israel
Tel: +9 723 902 4333
Fax: +9 723 902 4777
info@nemic.co.il
www.nemic.co.il



Russia

Technical Support:
St Petersburg
Tel: +7 (812) 6580463
Sales:
Moscow
Tel: +7 (499) 7557732
info@tdk-lambda.ru
www.tdk-lambda.ru

LOCAL DISTRIBUTION