

PRODUCT NUMBER
77311-YXX-XXLF

PLATING SEE SHEET 2

PIN STYLE SEE SHEET 2

RoHS COMPATIBLE
SEE NOTE 6

TOTAL NB OF POSITIONS 01 TO 36
OPTION LETTER SEE NOTE 7

PRODUCT NUMBER (BERGSTRIIP PACKAGING)
77311-YXX-00LF

PLATING

1= 0.76µm GOLD/GXT ON CONTACT
AREA, 2µm TIN MIN ON TAILS

8= 0.38µm GOLD/GXT ON CONTACT
AREA, 2µm TIN MIN ON TAILS

4= 2.0µm TIN MIN FULL PLATED

1.27µm NICKEL MIN UNDERLAYER FOR
ALL PLATING VERSIONS

INDICATES THE PRODUCT IS RoHS
COMPATIBLE, SEE NOTE 6

POSITIONS PER REEL : 00=36,000 (BERGSTRIIP)

PIN STYLE	MATING	SOLDER	OAL
01	5.84	2.41	10.8
02	5.84	3.42	11.8
18	5.84	3.05	11.43
22	7.75	3.05	13.35
24	6.75	2.9	12.2
27	6.6	2.66	11.8

NOTES:

- HOUSING MAT'L : HIGH TEMPERATURE
THERMOPLASTIC. UL94V-0 COLOR: BLACK
- PIN MATERIAL : PHOSPHOR BRONZE
- BERGSTIK PRODUCT PACKAGED IN POLYBAGS.
BERGSTRIIP PRODUCT PACKAGED PER REELS.
- 9N MIN RETENTION IN EITHER DIRECTION

- TO DETERMINE DIMENSIONS :
N = NUMBER OF POSITIONS PER ROW
EXAMPLE : 8 POS N x 2.54 = 20.32mm

6. RoHS COMPATIBLE PRODUCT SPECIFICATIONS

a - PLATING:

- "LF" MEANS THE PRODUCT IS LEAD-FREE,
2µm MINIMUM MATTE TIN OVER 1.27µm
MINIMUM NICKEL UNDERPLATE.

b - MANUFACTURING PROCESS COMPATIBILITY

- THE HOUSING WILL WITHSTAND EXPOSURE TO
260°C ±5°C SOLDER BATH TEMPERATURE FOR
5 SECONDS IN A WAVE SOLDER APPLICATION
WITH A 1.6mm MIN THICK CIRCUIT BOARD.
- REFLOW COMPATIBLE






c - LABELING:

- MEETS PACKAGING SPECS AS PER GS-14-920

d - LEGAL STATEMENT: SEE GS-47-0004

7. OPTION LETTER :

- T = TUBE PACKAGING WITHOUT PICK UP CAP
- K = TAPE & REEL PACKAGING, WITHOUT PICK UP CAP
ONLY FOR P/N 77311-462K04(LF) AND 77311-462K05(LF)
- KV = TAPE & REEL PACKAGING WITHOUT PICK UP CAP FOR CUSTOMER DEDICATED PART
ONLY FOR P/N 77311-462KV04LF
- C = HIGHT RETENTION FEATURES, SEE SHEET 2
- R = RETENTION FEATURES, SEE SHEET 2
IF RETENTION FEATURE "R" AND TUBE PACKAGING "T" ARE BOTH REQUIRED
OPTIONAL LETTER "R" WILL APPEAR INSTEAD OF THE FIRST DASH
EXAMPLE : 77311R424T03LF

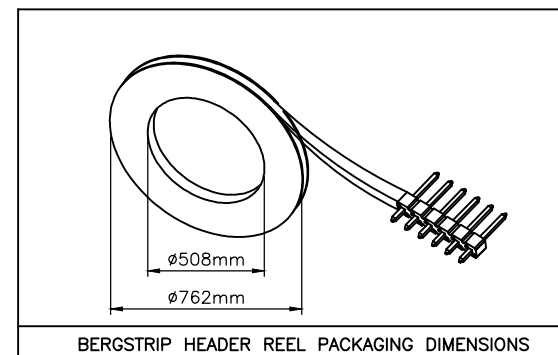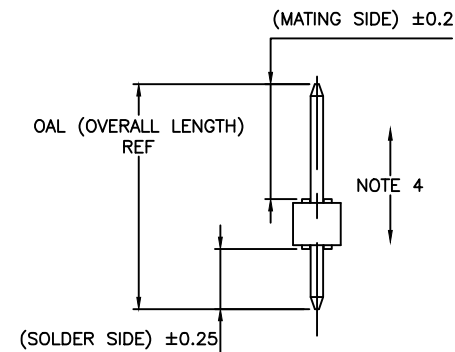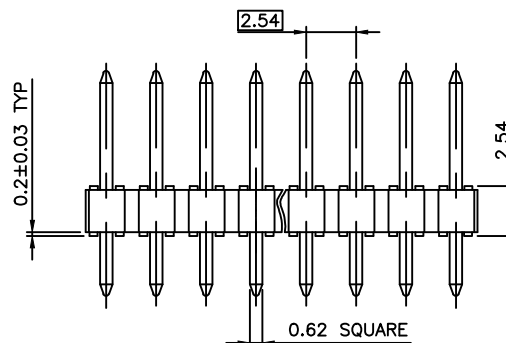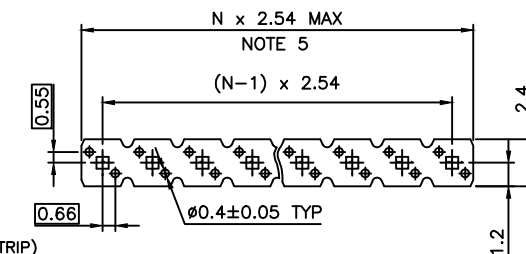

mat'l. code SEE NOTES				surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection 		product family BERGSTIK			
ltr	ecn no	dr	date	tolerances unless otherwise specified						title			
CF	F-22085	LMU	15.10.05	angles	linear	.X ±0.3						UNSHR.HEADER STR SR TMT	
CG	F-22100	AMA	15.10.08			.XX ±0.15							
CH	F-22133	AMA	15.10.12			.XXX ±0.05							
CJ	F-23581	AMA	16.03.22	dr		D.LE	01.01.24			dwg no		sheet 1 of 3	size
				enrg		JM.C	01.01.24			77311		A3	
CD	B-20497	BVE	15.03.18	chr		JM.C	01.01.24						
CE	B-20596	AMA	15.03.30	appd		JF.N	01.01.24						
sheet	revision	CJ	BW	B									
index	sheet	1	2	3									

PLATING

- 1 = 0.76µm GOLD/GXT ON CONTACT AREA, 2µm TIN MIN ON TAIL
- 4 = 2µm TIN MIN FULL PLATED
- 5 = 0.25µm GOLD/GXT ON CONTACT AREA, 2µm TIN MIN ON TAIL
- 8 = 0.38µm GOLD/GXT ON CONTACT AREA, 2µm TIN MIN ON TAIL
- G = 0.76µm FULL GXT
- S = 0.38µm FULL GXT
- T = 2µm TIN MIN FULL PLATED INCLUDED PIN TYP
 - 1.27µm NICKEL MIN UNDERLAYER FOR ALL PLATING VERSIONS


RETENTION FEATURES :

- PART NUMBER 77311-XXXXXXLF: DIM "Z"=(0.99)
PART NUMBER 77311-XXXXCXXLF: DIM "Z"= 1.05MIN -1.15MAX
- PINS "A" AND "B" USED FOR RETENTION.
- DIRECTION OF RETENTION SHOWN BY ARROWS.
- ON 4 TO 36 POSITIONS HEADER; RETENTION IS IN MID POSITION OF HEADER (4 CENTRAL PINS)
- FOR RETENTION OPTION , SOLDER TAIL LENGTH TO BE 2.9 MIN UP TO 3.5 MAX.
- HOUSING MATERIAL FOR P/N 77311-4AJC03LF & 77311-TAJC03LF HIGH TEMPERATURE THERMOPLASTIC UL94V-0 COLOR : NATURAL

PLATING SPECIFICATIONS :

- ONLY FOR PLATING 1XX, 8.0MM GOLD / GXT PLATING AREA FROM PIN TYPE ON MATING SIDE

RETENTION FEATURES

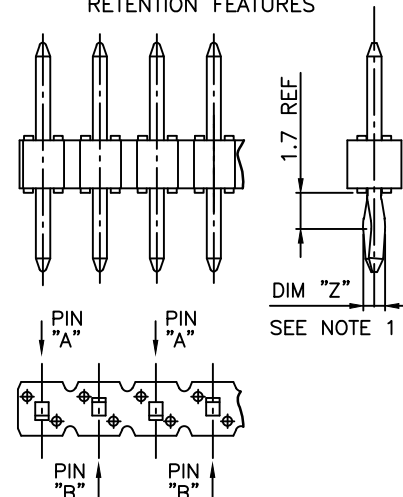

mat'l. code				surface	tolerance	projection	product family
ltr	ecn no	dr	date	ISO 1302	ISO 406 ISO 1101	mm	BERGSTIK
BU	B-20596	AMA	15.03.30	tolerances unless otherwise specified			title
BV	F-22085	LMU	15.10.05	angles	linear		UNSHR.HEADER
BW	F-22100	AMA	15.10.08			scale N/A	STR SR TMT
			dr	D.LE	01.01.24		dwg no
BR	B-19692	JCO	14.12.09	enrg	JM.C	01.01.24	sheet 2 of 3
BS	B-20169	BVE	15.02.12	chr	JM.C	01.01.24	size
BT	B-20497	BVE	15.03.18	appd	JF.N	01.01.24	A3
sheet	revision						type
index	sheet						CUSTOMER Drawing



FCIconnect.com

Copyright FCI

PRODUCTS SPECIFICATIONS

PIN	STYLE	MATING	SOLDER	OAL
01		5.84	2.41	10.8
02		5.84	3.42	11.8
03		5.72	5.09	13.35
05		5.72	10.14	18.4
08		5.72	17.78	26.04
15		8.51	2.55	13.6
18		5.84	3.05	11.43
19		12.83	3.03	18.4
20		15.37	3.04	20.95
22		7.75	3.05	13.35
24		6.75	2.9	12.2
25		8.51	3.18	14.22
27		6.6	2.65	11.8
26		15.57	2.84	20.95
29		17.5	3.46	23.5
32		10.3	3.05	15.9
38		5.84	3.82	12.2
39		11.2	3.05	16.8
46		8.08	2.98	13.6
58		14.47	3.05	20.06
62		13.5	3.05	19.09
70		6.54	3.50	12.57
83		20.46	3.00	26.00
85		5.72	8.51	16.76
87		6.98	3.05	12.57
91		5.6	10.21	18.35
92		5.65	12.76	20.95
93		6.00	4.81	13.35
94		15.60	3.20	21.25

NOTE 7

PRODUCTS SPECIFICATIONS

PIN	STYLE	MATING	SOLDER	OAL
95		10.00	8.45	20.95
96		10.95	3.05	16.55
97		9.00	3.55	15.09
98		3.00	1.35	6.84
99		24.00	3.05	29.50
AA		5.72	15.24	23.50
AB			N/A	
AC		7.21	3.05	12.80
AD		17.53	3.43	23.50
AE		4.99	2.80	10.33
AF		5.72	3.05	11.30
AG		5.84	4.95	13.33
AH		14.31	3.20	20.05
AJ		8.90	3.40	14.85
AK		25.06	3.00	30.80
AL		3.30	3.30	9.14
AM		9.26	3.05	14.85
AN		7.60	4.40	14.47
AP		7.80	3.30	13.60
AR		18.86	2.41	23.81
AS		11.91	1.45	15.90
AT		4.60	4.60	11.61
AU		12.10	3.10	17.70
AV		6.30	6.30	15.10
AW		9.16	1.80	13.50
AX		5.08	2.43	10.05
AY		7.49	3.47	13.50
BA		8.08	2.75	13.37
BB		10.80	2.15	15.50
BC		8.08	3.81	14.43
BD		10.10	2.16	14.80
BE		13.65	2.41	18.60
BF		2.54	5.32	10.40
BG		4.98	1.85	9.23
BH		4.69	2.41	9.50
BJ		7.21	6.15	15.90

NOTE 6

mat'l. code		surface		tolerance		projection		product family	
		ISO 1302		ISO 406 ISO 1101				BERGSTIK	
ltr		ecn no	dr	date	tolerances unless otherwise specified		title		
A		F-22100	AMA	15.10.08	angles		UNSHR.HEADER		
B		F-22133	AMA	15.10.12	linear		STR SR TMT		
							mm		
							scale N/A		
					dr		A.MA 15.10.08		
					enr		L.MU 15.10.08		
					chr		J.CO 15.10.08		
					appd		A.SO 15.10.08		
sheet		revision						dwg no	
index		sheet						sheet 3 of 3	
								size	
								A3	
								type	
								CUSTOMER Drawing	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

FCI:

[77311-103-08LF](#) [77311-829-05LF](#) [77311-887-36LF](#) [77311-893-36LF](#) [77311-103-02LF](#) [77311-103-03LF](#) [77311-103-06LF](#) [77311-105-02LF](#) [77311-111-36LF](#) [77311-115-04LF](#) [77311-115-12LF](#) [77311-115-15LF](#) [77311-115-16LF](#) [77311-119-07LF](#) [77311-120-06LF](#) [77311-126-36LF](#) [77311-129-16LF](#) [77311-132-04LF](#) [77311-132-10LF](#) [77311-138-06LF](#) [77311-146-05LF](#) [77311-146-11LF](#) [77311-146-16LF](#) [77311-811-36LF](#) [77311-819-04LF](#) [77311-820-36LF](#) [77311-858-36LF](#) [77311-102S02LF](#) [77311-102S03LF](#) [77311-102S04LF](#) [77311-102S05LF](#) [77311-102S06LF](#) [77311-102S07LF](#) [77311-102S08LF](#) [77311-102S09LF](#) [77311-102S10LF](#) [77311-102S13LF](#) [77311-102S16LF](#) [77311-102S20LF](#) [77311-102S21LF](#) [77311-102S22LF](#) [77311-102S24LF](#) [77311-102T02LF](#) [77311-102T03LF](#) [77311-102T05LF](#) [77311-102T06LF](#) [77311-102T08LF](#) [77311-102T12LF](#) [77311-102T17LF](#) [77311-105-32LF](#) [77311-115-10LF](#) [77311-118R10LF](#) [77311-118R12LF](#) [77311-120-17LF](#) [77311-120-20LF](#) [77311-126-10LF](#) [77311-129-07LF](#) [77311-146-03LF](#) [77311-146-04LF](#) [77311-158-36LF](#) [77311-170-16LF](#) [77311-403-03LF](#) [77311-404-24LF](#) [77311-405-08LF](#) [77311-411-36LF](#) [77311-415-16LF](#) [77311-415-18LF](#) [77311-418-08](#) [77311-426-16LF](#) [77311-432-04LF](#) [77311-432-05LF](#) [77311-446-06LF](#) [77311-811-07LF](#) [77311-820-20LF](#) [77311-846-16LF](#) [77311-852-05LF](#) [77311-891-36LF](#) [77311-892-36LF](#) [77311-120-22LF](#) [77311-899-03LF](#) [77311-185-04LF](#) [77311-415-14LF](#) [77311-419-10LF](#) [77311-403-36LF](#) [77311-103-16LF](#) [77311-G01-09LF](#) [77311-132-11LF](#) [77311-415-13LF](#) [77311-487-02LF](#) [77311-487-08LF](#) [77311-146-06LF](#) [77311-883-20LF](#) [77311-194-04LF](#) [77311-439-06LF](#) [77311-439-05LF](#) [77311-197-03LF](#) [77311-487-06LF](#) [77311-832-10LF](#) [77311-195-10LF](#) [77311-132-20LF](#)