

4


3

2




1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC		DIBT		REVISIONS			
GP	00	F	LTR	DESCRIPTION	DATE	OWN	APP'D
		J		REVISED PER ECO-06-024575	24JAN07	JDP	EDB

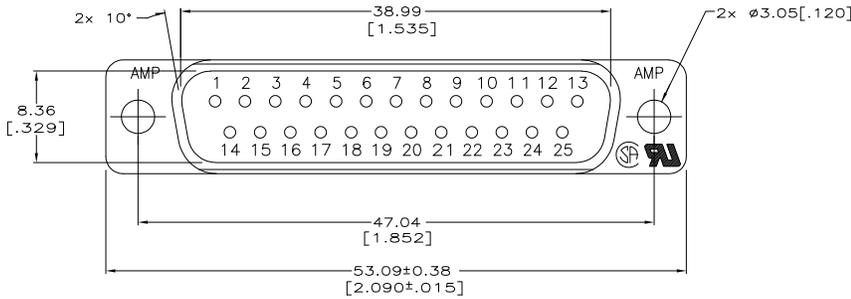

- △ HOUSING: BLACK POLYESTER, UL 94V-0 RATED; CONTACTS: BRASS
- △ GOLD PLATED FOR LENGTH OF 3.81[.150] MIN FROM MATING END, GOLD FLASH IN MATED AREA, 2.54µm [.000100] MIN TIN OR TIN-LEAD FOR A LENGTH OF DIMENSION A FROM OPPOSITE END, ALL OVER 1.27µm [.000050] MIN NICKEL.
- △ GOLD PLATED FOR LENGTH OF 3.81[.150] MIN FROM MATING END, 0.76µm [.000030] MIN GOLD IN MATED AREA, 2.54µm [.000100] MIN TIN OR TIN-LEAD FOR A LENGTH OF DIMENSION A FROM OPPOSITE END, ALL OVER 1.27µm [.000050] MIN NICKEL.
OR
GOLD FLASH OVER PALLADIUM NICKEL PLATED FOR LENGTH OF 3.81 [.150] MIN FROM MATING END, 0.76µm [.000030] MIN PALLADIUM NICKEL IN MATED AREA, 2.54µm [.000100] MIN TIN OR TIN-LEAD FOR A LENGTH OF DIMENSION A FROM OPPOSITE END, BOTH OVER 1.27µm [.000050] MIN NICKEL.

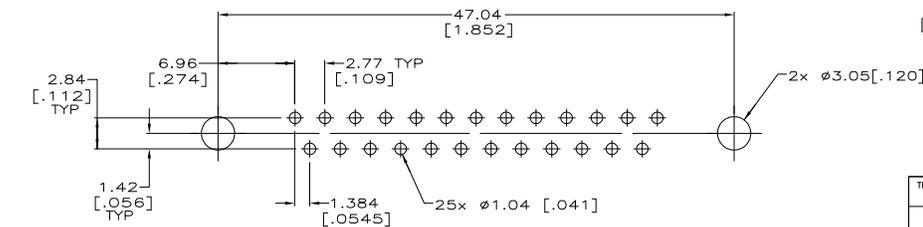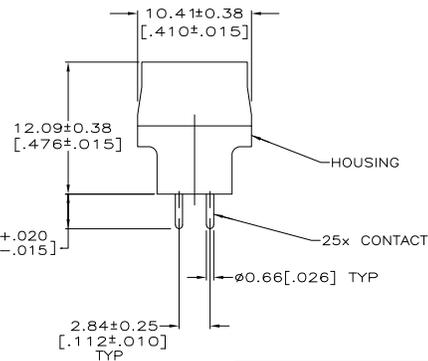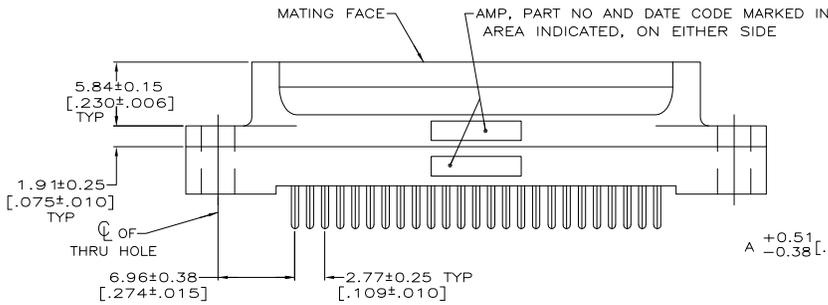

RECOMMENDED PC BOARD MOUNTING DIMENSIONS

OBSELETE	6.35	[.250]	△	208008-6
OBSELETE	6.35	[.250]	△	208008-5
OBSELETE	4.32	[.170]	△	208008-4
SUPSD BY 208008-4	4.32	[.170]	△	208008-3
	3.18	[.125]	△	208008-2
	3.18	[.125]	△	208008-1

THIS DRAWING IS A CONTROLLED DOCUMENT. DIM: 125EPOS S: PETERS 125EPOS S: BOLASH 125EPOS NAME: M. WALMSLEY 125EPOS PRODUCT SPEC: 108-40025 APPLICATION SPEC: WEIGHT: CUSTOMER DRAWING

tyco Electronics Tyco Electronics Corporation Harrisburg, PA 17105-3608

PLUG ASSEMBLY, SIZE 3, 25 POSN, VERTICAL, AMPLIMITE HD-20

SIZE: A2 CASE CODE: 00779 DRAWING NO: C=208008 RESTRICTED TO: 4:1 SCALE SHEET 1 of 1 REV J