

Raychem

Thermofit® Tubing Specification Control Drawing

No: **SAS-XXX-XXX-1048**

Slit Adhesive Sleeve

Rev: I

Date: October 30, 1996

Page: 1 of 1

Slit Adhesive Sleeve (S-1048)

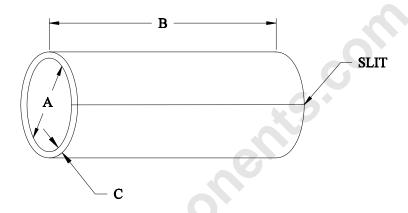


Table 1: <u>Dimensions</u> (inches)

Size	Extruded ID (A)	Cut Length (B)	Extruded Wall (C)
SAS-090-1.00-1048	$.090 \pm .005$	$1.000 \pm .050$	$0.024 \pm .005$
SAS-115-1.00-1048	.115 ± .005	$1.000 \pm .050$	$0.032 \pm .005$
SAS-160-1.00-1048	$.160 \pm .005$	$1.000 \pm .050$	$0.032 \pm .005$
SAS-200-1.00-1048	.200 ± .005	$1.000 \pm .050$	$0.035 \pm .005$
SAS-250-1.00-1048	.250 ± .010	$1.000 \pm .050$	$0.035 \pm .005$
SAS-300-1.00-1048	.300 ± .010	$1.000 \pm .050$	$0.067 \pm .010$

Color: Amber

Requirements: The Silt Adhesive Sleeves shall meet all the requirements of Raychem Specification RT-1051.

Raychem reserves the right to amend this specification at any time. Users should evaluate the suitability of the product for their application.