


COIL: \bullet +25 °C
 RESISTANCE 700 OHMS \pm 10%
 NOMINAL VOLTAGE 26.5 VDC
 MUST OPERATE 15.0 VDC
 MUST RELEASE 1.5 VDC

ENVIRONMENT:
 VIBRATION 10 CPS TO 3000 CPS @ 30 g's
 SHOCK 100 g's 6 \pm 1 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

NOTES: MAXIMUM TRANSIENT SUPPRESSED VOLTAGE OF -48 VDC WITH BIFILAR COIL

CUSTOMER DATA SHEET

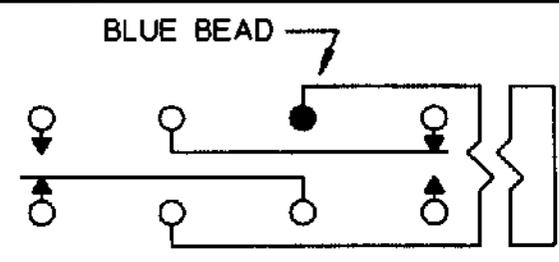

CONTACT RATING: LOW LEVEL TO 2A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 11/1/91 CK. 11/1/91



CUST. QPL
 CUST. NO. M39016/22-007M

TYPE "HMB" RELAY

HMB1131K01M

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[HMB1131K01M](#)