

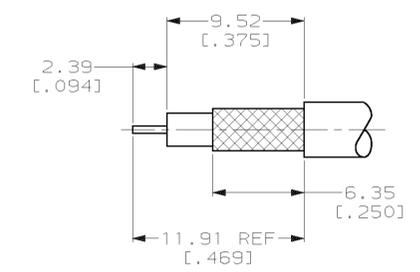


LOC	DIST	P	F	ZONE	LTR	REVISIONS	DATE	APPD
AJ	16				R	REVISED PER EC 0020-0324-01	06SEP01	JTL

- ① USE PRO-CRIMPER II: 354940-1
- 2. USE INSTRUCTION SHEET 9766
- ③ SPECIAL PACKAGING: BULK PACKAGE 25 PIECES
- ④ SPECIAL PACKAGING: BULK PACKAGE 100 PIECES

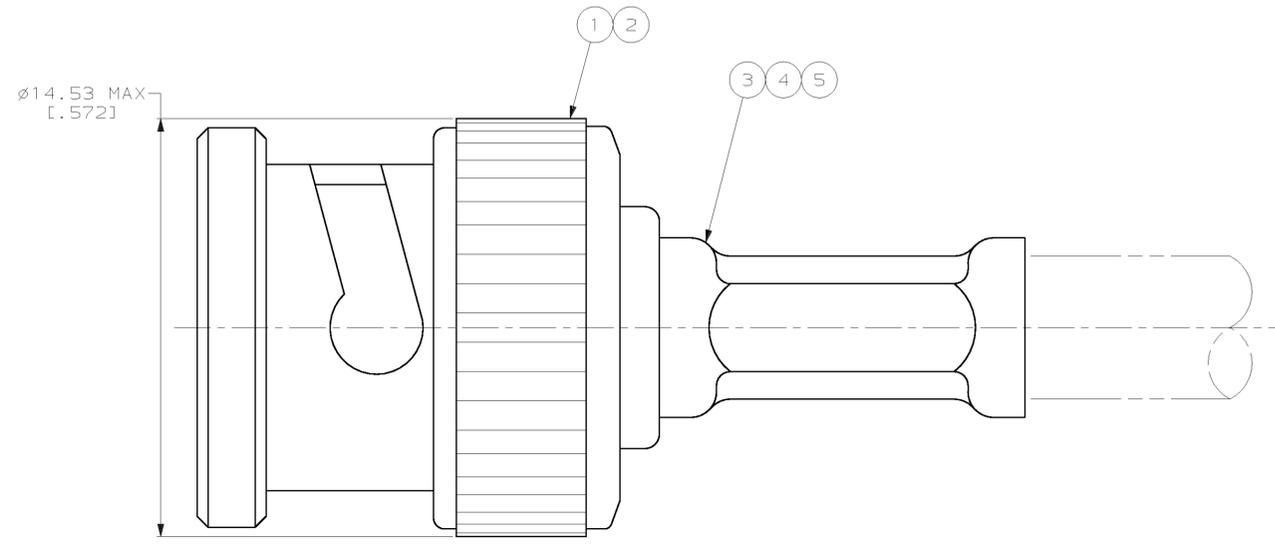

RECOMMENDED STRIP LENGTH
SCALE 4:1

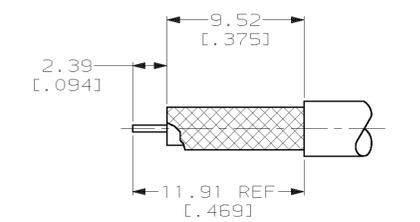

RECOMMENDED STRIP LENGTH
SCALE 4:1
(FOR 413589-5 AND 1-413589-2 ONLY)

④	CUSTOM CABLE: C/C=∅.021, DIELECTRIC=∅.122, JACKET=∅.173	1.07 [.042]	5.41 [.213]	852922-1	-	-	221132-3	1-413657-0	413653-5	2-413589-1
OBSOLETE	MONTROSE 8466-3 AND 8299-3	1.07 [.042]	5.41 [.213]	852922-1	-	-	221132-3	1-413657-2	413653-5	1-413589-8
④	BELDEN 8218 AND JIS 2.5C-2V	1.07 [.042]	4.52 [.178]	852922-2	-	-	3-221132-3	413657-4	413653-2	1-413589-7
③	BELDEN 8218 AND JIS 2.5C-2V	1.07 [.042]	4.52 [.178]	852922-2	-	-	3-221132-3	413657-4	413653-2	1-413589-6
③	JIS 2.5C-2W	1.07 [.042]	5.41 [.213]	852922-1	-	-	221132-3	413657-4	413653-2	1-413589-5
③	JIS 3C-2W	1.07 [.042]	6.48 [.255]	852922-1	-	-	3-221132-6	1-413657-0	413653-6	1-413589-4
③	AT&T KS 19224 L2 CABLE AND JIS 1.5C-XV	1.07 [.042]	4.52 [.178]	852922-2	227194-2	222001-4	413658-6	413657-6	413653-2	1-413589-3
③	BELDEN 8281, 9231 & AT&T 728 AND JIS 5C-2V	1.07 [.042]	8.23 [.324]	852922-3	-	-	221132-9	413657-8	413653-3	1-413589-2
③	JIS 3C-2V	1.07 [.042]	5.41 [.213]	852922-1	-	-	2-221132-6	1-413657-0	413653-5	1-413589-1
	AT&T 735A	1.07 [.042]	4.52 [.178]	852922-2	-	-	413658-6	413657-4	413653-2	1-413589-0
	RG-59 TYPE WITH .031 DIA CENTER CONTACT, BELDEN 9266, 9240 & 9259	1.07 [.042]	6.48 [.255]	852922-1	-	-	221132-6	413657-8	413653-1	413589-9
	RG-179/U, 179A/U, 179B/U, 187/U & 187A/U	1.07 [.042]	4.52 [.178]	852922-2	227194-2	222001-4	413658-9	413657-6	413653-2	413589-8
	AT&T 734A	1.07 [.042]	6.48 [.255]	852922-1	-	-	2-221132-0	413657-8	413653-4	413589-7
	TIMES RG-59/U, DOUBLE BRAID, .270 OD JACKET	1.07 [.042]	8.23 [.324]	852922-3	-	-	221132-9	413657-2	413653-1	413589-6
	BELDEN 8281, 9231 & AT&T 728 AND JIS 5C-2V	1.07 [.042]	8.23 [.324]	852922-3	-	-	221132-9	413657-8	413653-3	413589-5
	AT&T KS 19224 L2 CABLE AND JIS 1.5C-XV	1.07 [.042]	4.52 [.178]	852922-2	227194-2	222001-4	413658-6	413657-6	413653-2	413589-4
	BELDEN 8218 AND JIS 2.5C-2V	1.07 [.042]	4.52 [.178]	852922-2	-	-	3-221132-3	413657-4	413653-2	413589-3
	RG-59/U, 59A/U & 59B/U	1.07 [.042]	6.48 [.255]	852922-1	-	-	221132-6	413657-2	413653-1	413589-2
	BELDEN 88241	1.07 [.042]	6.48 [.255]	852922-1	-	-	413658-3	413657-2	413653-1	413589-1
	FOR USE WITH CABLE	CONTACT CRIMP (SQUARE)	FERRULE CRIMP (HEX)	DIE SET ①	⑤ TUBING PLASTIC QTY=1	④ TUBING QTY=1	③ FERRULE QTY=1	② CONTACT QTY=1	① PLUG ASSY QTY=1	PART NUMBER

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES]		TOLERANCES ON:		MATERIAL		FINISH		WEIGHT	
DR	D.LAMAN	4-27-90							
CHK	R.E.RUTH	4/30/90							
APPD	M.PHILLIPS	4/30/90							
APPD	R.E.RUTH	4/30/90							
NAME		PLUG, 75 OHM, HEX CRIMP, BNC		SIZE		CAGE CODE		DRAWING NO	
				D		00779		413589	
				SCALE		8:1		SHEET	
								1 OF 1	

AMP AMP Incorporated
Harrisburg, PA 17105-3608

PLUG, 75 OHM,
HEX CRIMP, BNC

SCALE 8:1
SHEET 1 OF 1